FED. SUP CLASS
5310

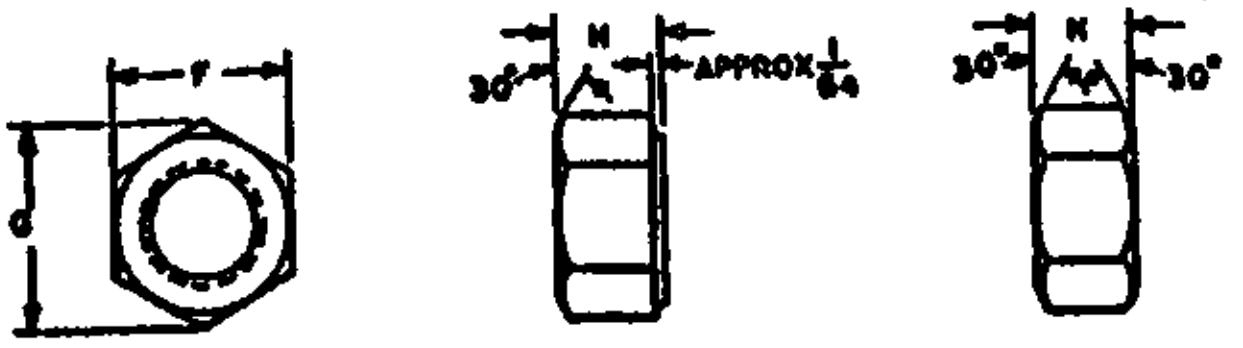

ACCEPTABLE DESIGNS

TABLE I

| NOMINAL SIZE OR BASIC MAJOR DIAMETER OF THREAD | | | 1/4<br>.2500 | 5/16<br>.3125 | 3/8<br>.3750 | 7/16<br>.4375 | 1/2<br>.5000 | 9/16<br>.5625 | 5/8<br>.6250 | 3/4<br>.7500 | 7/8<br>.8750 | 1<br>1.0000 |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| THREADS PER INCH | | | 20 | 18 | 16 | 14 | 13 | 12 | 11 | 10 | 9 | 8 |
| F | WIDTH ACROSS FLATS | NOM.<br>MAX.<br>MIN. | 7/16<br>.4375<br>.428 | 1/2<br>.5000<br>.489 | 9/16<br>.5625<br>.551 | 11/16<br>.6875<br>.675 | 3/4<br>.7500<br>.736 | 7/8<br>.8750<br>.861 | 15/16<br>.9375<br>.922 | 1-1/8<br>1.1250<br>1.088 | 1-5/16<br>1.3125<br>1.269 | 1-1/2<br>1.5000<br>1.450 |
| G | WIDTH ACROSS CORNERS | MAX. | .505 | .577 | .650 | .794 | .866 | 1.010 | 1.083 | 1.299 | 1.516 | 1.732 |
| | | MIN. | .488 | .557 | .628 | .768 | .840 | .982 | 1.051 | 1.240 | 1.447 | 1.653 |
| H | THICKNESS | NOM.<br>MAX.<br>MIN. | 7/32<br>.226<br>.212 | 17/64<br>.273<br>.258 | 21/64<br>.337<br>.320 | 3/8<br>.385<br>.365 | 7/16<br>.448<br>.427 | 31/64<br>.496<br>.473 | 35/64<br>.559<br>.535 | 41/64<br>.665<br>.617 | 3/4<br>.776<br>.724 | 55/64<br>.887<br>.831 |
| MATERIAL | | | DASH NO. | DASH NO. | DASH NO. | DASH NO. | DASH NO. | DASH NO. | DASH NO. | DASH NO. | DASH NO. | DASH NO. |
| BRASS | | | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 |

| NOMINAL SIZE OR BASIC MAJOR DIAMETER OF THREAD | | | 1-1/8<br>1.1250 | 1-1/4<br>1.2500 | 1-3/8<br>1.3750 | 1-1/2<br>1.5000 | 1-3/4<br>1.7500 | 2<br>2.0000 | 2 1/4<br>2.2500 | 2-1/2<br>2.5000 | 2-3/4<br>2.7500 | 3<br>3.0000 |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| THREADS PER INCH | | | 7 | 7 | 6 | 6 | 5 | 4-1/2 | 4-1/2 | 4 | 4 | 4 |
| F | WIDTH ACROSS FLATS | NOM.<br>MAX.<br>MIN. | 1-11/16<br>1.6875<br>1.631 | 1-7/8<br>1.8750<br>1.812 | 2-1/16<br>2.0625<br>1.994 | 2-1/4<br>2.2500<br>2.175 | 2-5/8<br>2.6250<br>2.538 | 3<br>3.000<br>2.900 | 3-3/8<br>3.3750<br>3.262 | 3-3/4<br>3.7500<br>3.625 | 4-1/8<br>4.1250<br>3.988 | 4-1/2<br>4.5000<br>4.350 |
| G | WIDTH ACROSS CORNERS | MAX. | 1.949 | 2.165 | 2.382 | 2.598 | 3.031 | 3.464 | 3.897 | 4.330 | 4.763 | 5.196 |
| | | MIN. | 1.859 | 2.066 | 2.273 | 2.480 | 2.893 | 3.306 | 3.719 | 4.133 | 4.546 | 4.959 |
| H | THICKNESS | NOM.<br>MAX.<br>MIN. | 31/32<br>.999<br>.939 | 1-1/16<br>1.094<br>1.030 | 1-11/64<br>1.206<br>1.138 | 1-9/32<br>1.317<br>1.245 | 1-1/2<br>1.540<br>1.460 | 1-23/32<br>1.763<br>1.675 | 1-59/64<br>1.970<br>1.876 | 2-9/64<br>2.193<br>2.089 | 2-23/64<br>2.415<br>2.303 | 2-37/64<br>2.638<br>2.518 |
| MATERIAL | | | DASH NO. | DASH NO. | DASH NO. | DASH NO. | DASH NO. | DASH NO. | DASH NO. | DASH NO. | DASH NO. | DASH NO. |
| BRASS | | | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 |

NOTES:

1. MATERIAL: Brass, Naval, in accordance with QQ-B-637, alloy no. 462, hard or alloy no. 464, half-hard. Ⓑ
2. PROTECTIVE COATING: Black chemical finish in accordance with MIL-F-495.
3. THREADS: The threads shall be in accordance with Screw-Thread Standards For Federal Services, Handbook H28.
4. DIMENSIONS: All dimensions are in inches, unless otherwise specified.
5. PART NUMBER: The MS part number consists of the MS number, plus the dash number. Example: MS51969-1.
6. Referenced documents shall be of the issue in effect on date of invitations for bid.
7. For design feature purposes, this standard takes precedence over procurement documents referenced herein.

Ⓑ For changes see sheets 1 and 2.

REVIEWER: AT, AV, IS; ME, DSA, 11
USER: GL, MC, MI, TD

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

APPROVED 20 JAN 1964 REVISED Ⓐ 22 MAR 1967 Ⓑ 24 JUL 1972

| | | |
|---|---|---|
| P.A. WC<br>Other Cust SH<br>82 | TITLE<br>NUT, PLAIN, HEXAGON-BRASS,<br>Ⓑ BLACK CHEMICAL FINISH, UNC-2B | MILITARY STANDARD<br>MS51969 |
| PROCUREMENT SPECIFICATION<br>FF-N-836 | SUPERSEDES:<br>MS35690 in part | SHEET 1 OF 2 |

Source: https://assist.dla.mil -- Downloaded: 202610-23T18:15Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5310

## INTERCHANGEABILITY TABLE

The following nuts covered by the dash numbers given in MS35690 are cancelled after the date indicated on the cancelled document. Use the dash numbers given in the preceding sheet. The cancelled nuts cannot always replace the new nuts and should be used until existing stocks are depleted. Use only the new nuts for design and replacement. Replacement shall be in accordance with TABLE II. Interchangeability information regarding part numbers on superseded drawings is also contained in TABLE II.

TABLE II

PART NUMBERS

| CANCELLED MS35690 | NEW MS51969 | CANCELLED MS35690 | NEW MS51969 | CANCELLED MS35690 | NEW MS51969 |
|---|---|---|---|---|---|
| 411 | 1 | 911 | 6 | 2411 | 14 |
| 412 | 1 | 1011 | 7 | 2811 | 15 |
| 511 | 2 | 1211 | 8 | 3211 | 16 |
| 512 | 2 | 1411 | 9 | 3611 | 17 |
| 611 | 3 | 1611 | 10 | 4011 | 18 |
| 612 | 3 | 1811 | 11 | 4411 | 19 |
| 711 | 4 | 2011 | 12 | 4811 | 20 |
| 811 | 5 | 2211 | 13 | | |

REVIEWER: AT, AV, ZR, ME, MSA, 11
USER: CE, MC, MI, YD

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

APPROVED 20 JAN 1964 REVISED Ⓐ 22 MAR 1967 Ⓑ FOR CHANGES SEE SHEET 1 AND 2.

| | | |
|---|---|---|
| P.A. WC<br>Other Cust SH<br>82 | TITLE<br>NUT, PLAIN, HEXAGON-BRASS,<br>Ⓑ BLACK CHEMICAL FINISH, UNC-2B | MILITARY STANDARD<br>MS 51969 |
| PROCUREMENT SPECIFICATION<br>[illegible] | SUPERSEDES:<br>MS35690 in part | SHEET 2 OF |

Source: https://assist.dla.mil -- Downloaded: 202610-23T18:15Z
Check the source to verify that this is the current version before use.