

FED. SUP CLASS
2330

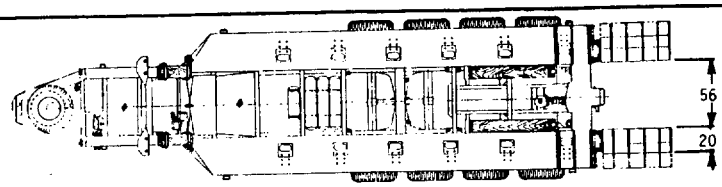

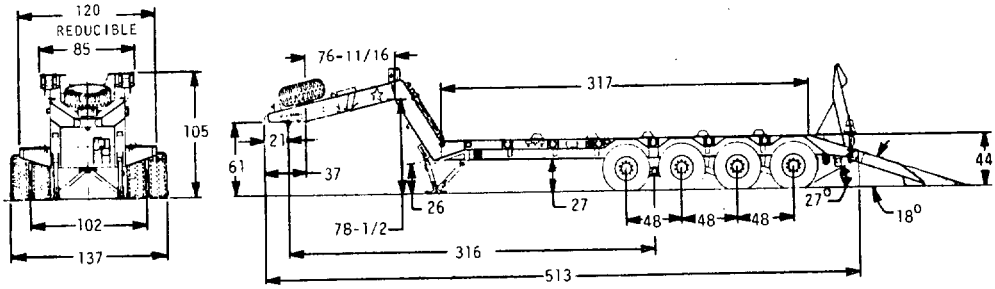

VEHICLE CHARACTERISTICS

PRIME MOVER: TRUCK, TRACTOR; 22-1/2 TON, 8 X 8 XM746 OR EQUIVALENT

FIFTH WHEEL: HEIGHT 61

KING PIN: SIZE 3-1/2

CURB WEIGHT: (W/OVE) 31,000

WEIGHT DISTRIBUTION: (W/52-1/2 TON, M-60 PAYLOAD)

FIFTH WHEEL	40,500
FIRST AXLE	23,750
SECOND AXLE	23,750
THIRD AXLE	24,000
FOURTH AXLE	24,000
LANDING GEAR	67,700

SHIPPING DATA:

O.A. LENGTH	513
LOADING PLATFORM LENGTH	317
O.A. WIDTH	137
REDUCIBLE	120
O.A. HEIGHT	105
REDUCIBLE-DEPENDENT ON LOADING	
SQUARE FEET	429

TIE DOWNS: 16
(6 EACH SIDE & 2 FRONT & 2 REAR)
LIFT POINTS 4

BRIDGE CLASSIFICATION: (XM746 TRACTOR & M-60 PAYLOAD) 76 "CAUTION CROSSING"

INTERSECTION CAPABILITY: (W/XM746):
30 FT. (WALL TO WALL)

FORDING DEPTH: DEPENDENT ON TRACTOR

MIN. GROUND CLEARANCE: 9

DEPARTURE ANGLE: 27°

LOADING: REAR END

RAMPS:
TWO ALUMINUM, ATTACHED, FIELD REMOVABLE

DECK HEIGHT: 44

TRACK GUIDES: 8
W/TWELVE LOCATIONS AND SIX POSITIONS

PAYLOAD TIE DOWNS: 28

SUSPENSION:
FIRST TWO AXLES-SOLID WALKING BEAM
LAST TWO AXLES-TRAILING ARM W/AIR SPRINGS & AIR LIFT

AXLE TYPE: ROCKWELL 7 IN. OD TUBE, 1 IN. WALL, CAPACITY 25,000 LBS.

TREAD: 102

WHEELS:
DUAL, 15° DROP CENTER 11-3/4 x 19-1/2

TIRES:

SIZE	15 x 19-1/2
TYPE	BIAS PLY, TUBELESS
PLY	14 PR
TREAD DESIGN	NDCC
UNDER TREAD	SHREADED WIRE
RECOMMENDED PRESSURE	60 PSI
SPARE	ONE

SERVICE BRAKES:

NUMBER	8
BRAKE SIZE	15 X 7
ACTUATION, AIR WEDGE	(2 PER WHEEL END)

PARKING BRAKES/FAILSAFES:

NUMBER	8
ACTUATION	SPRING

LANDING GEAR: ALUMINUM, PIN TYPE-FOUR POSITION PLUS STOWAGE POSITION

WINCHING PROVISIONS: FOUR CABLE ROLLER ASSEMBLIES AND TWO SNATCH BLOCKS PROVIDED.

ELECTRICAL SYSTEM: 24 VOLT
INCLUDES SERVICE LIGHTS, BLACKOUT LIGHTS, ROTATING BEACON, AND UTILITY OUTLETS

NOTES:
1. DIMENSIONS ARE IN INCHES AND ARE SHOWN FOR ENGINEERING REFERENCE ONLY.
2. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
3. THIS VEHICLE SHALL BE IN ACCORDANCE WITH REFERENCED ENGINEERING DRAWINGS, COPIES WHICH MAY BE OBTAINED FROM: US ARMY TANK-AUTOMOTIVE COMMAND, WARREN, MICH. 48090.

APPROVED 3 MAY 85 REVISED

This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of defense.
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

P.A. ARMY - AT Other Cust	TITLE SEMITRAILER, LOW BED: HEAVY EQUIPMENT TRANSPORTER, 60 TON, M747	MILITARY STANDARD MS52162(AT)
PROCUREMENT SPECIFICATION MIL-S-62272	SUPERSEDES:	SHEET 1 OF 1

DD FORM 1 SEP 87 672-1 (LIMITED COORDINATION)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:21Z
Check the source to verify that this is the current version before use.