
FED. SUP CLASS
2320

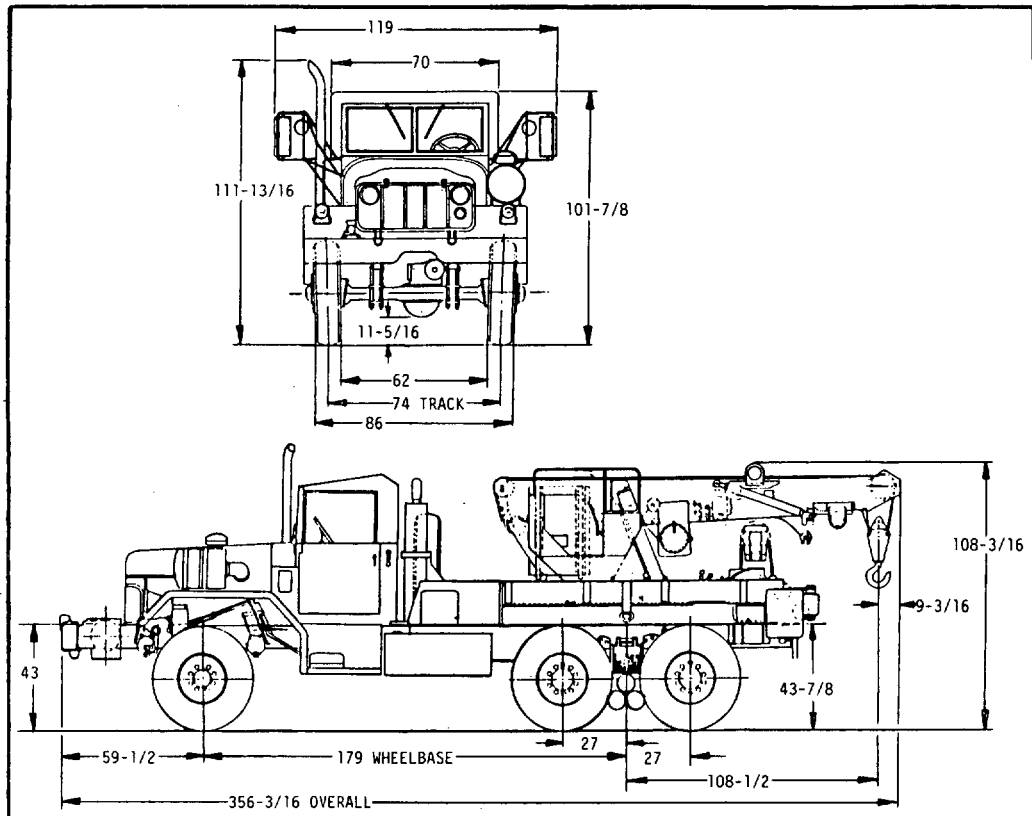

VEHICLE CHARACTERISTICS

CHASSIS MODEL:	M809A1
BRIDGE CLASSIFICATION:	W/W
EMPTY	10
WITH PAYLOAD	17
CURB WEIGHT, FULLY EQUIPPED, LESS PAYLOAD & CREW:	
FRONT	10,530 LBS
REAR BOGIE	24,520 LBS
TOTAL	35,050 LBS
PAYLOAD:	7,000 LBS
GROSS WEIGHT, FULLY EQUIPPED WITH PAYLOAD, LESS CREW:	
FRONT	6,590 LBS
REAR BOGIE	35,460 LBS
TOTAL	42,050 LBS
(ADD 400 LBS FOR 2-MAN CREW W/EQUIPMENT)	
TOWED LOAD ALLOWANCE:	20,000 LBS
MAX VERTICAL LOAD ON PINTLE:	2,000 LBS
SHIPPING DIMENSIONS:	
CUBIC FEET	2,175
SQUARE FEET	241
WIDTH (EXCLUDING MIRRORS)	97-1/2
HEIGHT W/MACHINE GUN RING MOUNT	119-1/2

CENTER OF GRAVITY: (AT CURB WEIGHT)	W/W
ABOVE GROUND	47-7/8
REAR OF CENTERLINE OF FRONT AXLE	134-7/8
CENTER OF GRAVITY: (W/PAYLOAD)	
REAR OF CENTERLINE OF FRONT AXLE	150-7/8
PERFORMANCE:	
AT GROSS WEIGHT W/O TOWED LOAD	
MAXIMUM SPEED	52 MPH
MAXIMUM GRADE	60 %
CRUISING RANGE	500 MILES
AT GROSS WEIGHT W/TOWED LOAD	
MAXIMUM SPEED	52 MPH
MAXIMUM GRADE	46 %
CRUISING RANGE	400 MILES

BODY:
CRANE BODY ASSY 10876170
REVOLVING HYDRAULIC CRANE TYPE WITH SELF-SUPPORTED EXTENSIBLE BOOM. BOOM TO GROUND SUPPORTS AND OUTRIGGERS ARE PROVIDED TO STABILIZE CRANE OPERATIONS. CAPACITY 14,500 LB WINCH ON REAR OF BODY.

ON-VEHICLE EQUIPMENT: (OVE)	
BASIC ISSUE ITEMS	12300877
ADDITIONAL AUTHORIZED LIST	12300998
ACCESSORY SUPPLEMENTAL KITS:	12300925

NOTES:
1. DIMENSIONS ARE IN INCHES AND ARE SHOWN FOR ENGINEERING REFERENCE ONLY.
2. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
3. THIS VEHICLE SHALL BE IN ACCORDANCE WITH REFERENCED ENGINEERING DRAWINGS, COPIES WHICH MAY BE OBTAINED FROM: US ARMY TANK-AUTOMOTIVE COMMAND, WARREN, MICH. 48090.

APPROVED 14 JUN 85 REVISED

MS PART NO.	ENGINEERING DWG NO.	
MS52188-1	8736857	WITH WINCH

P. A. ARMY-AT Other Cust	INTERNATIONAL INTEREST	TITLE TRUCK: WRECKER, 5 TON, 6x6, M816	MILITARY STANDARD MS52188(AT)
PROCUREMENT SPECIFICATION MIL-T-740	SUPERSEDES:		SHEET 1 OF 1

DD FORM 1 MAY 73 672-1 LIMITED COORDINATION

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:22Z
Check the source to verify that this is the current version before use.