
MS9171 (ASG)

FED. SUP CLASS 5306

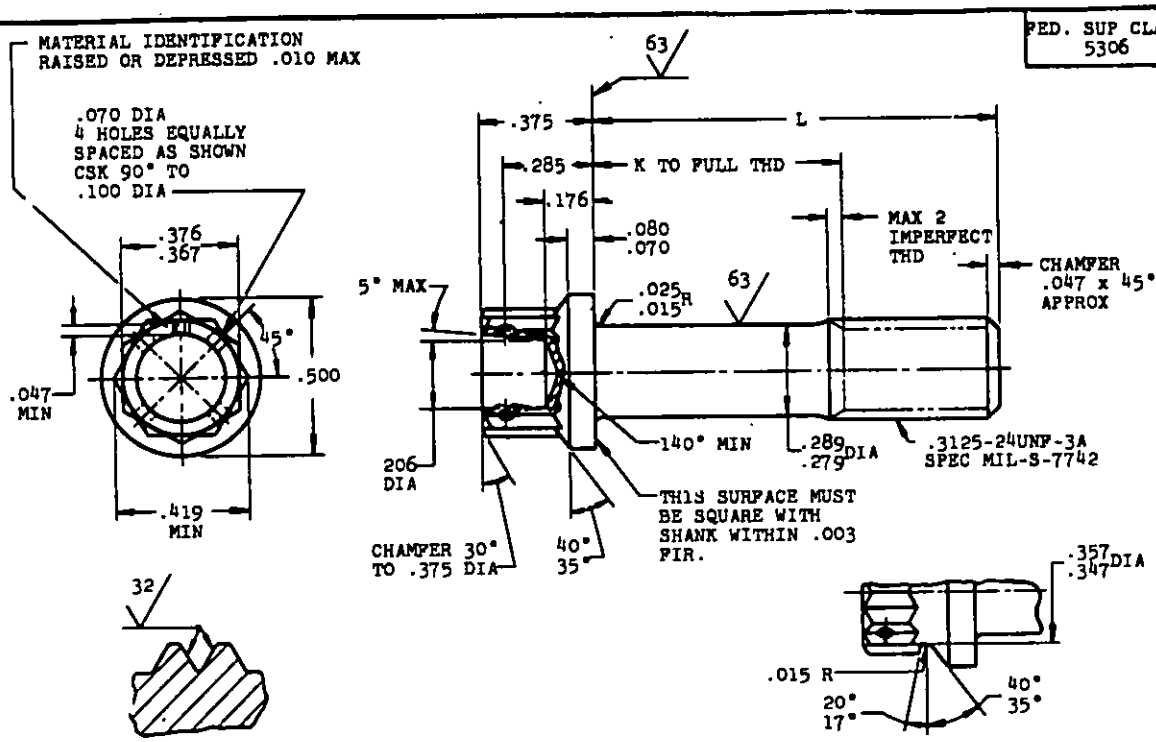

SECTION THRU THREAD PROFILE

OPTIONAL SHAPE OF HEAD

PART NO.	L	K +.000 -.060	APPROX WEIGHT LBS/100	PART NO.	L	K +.000 -.060	APPROX WEIGHT LBS/100	PART NO.	L	K +.000 -.060	APPROX WEIGHT LBS/100
				MS9171-22	1.625	.750	4.10	MS9171-40	3.750	2.875	7.95
MS9171-05	.562	(a)	2.21	MS9171-23	1.688	.812	4.22	MS9171-41	3.875	3.000	8.17
MS9171-06	.625	(a)	2.28	MS9171-24	1.750	.875	4.33	MS9171-42	4.000	3.125	8.40
MS9171-07	.688	(a)	2.39	MS9171-25	1.875	1.000	4.55	MS9171-43	4.125	3.250	8.63
MS9171-08	.750	(a)	2.51	MS9171-26	2.000	1.125	4.77	MS9171-44	4.250	3.375	8.86
MS9171-09	.812	(a)	2.62	MS9171-27	2.125	1.250	5.00	MS9171-45	4.375	3.500	9.08
MS9171-10	.875	(a)	2.73	MS9171-28	2.250	1.375	5.23	MS9171-46	4.500	3.625	9.30
MS9171-11	.938	(a)	2.85	MS9171-29	2.375	1.500	5.45	MS9171-47	4.625	3.750	9.52
MS9171-12	1.000	.125	2.96	MS9171-30	2.500	1.625	5.67	MS9171-48	4.750	3.875	9.74
MS9171-13	1.062	.188	3.07	MS9171-31	2.625	1.750	5.90	MS9171-49	4.875	4.000	9.95
MS9171-14	1.125	.250	3.19	MS9171-32	2.750	1.875	6.13	MS9171-50	5.000	4.125	10.17
MS9171-15	1.188	.312	3.30	MS9171-33	2.875	2.000	6.36	MS9171-51	5.125	4.250	10.40
MS9171-16	1.250	.375	3.41	MS9171-34	3.000	2.125	6.58	MS9171-52	5.250	4.375	10.63
MS9171-17	1.312	.438	3.52	MS9171-35	3.125	2.250	6.80	MS9171-53	5.375	4.500	10.86
MS9171-18	1.375	.500	3.64	MS9171-36	3.250	2.375	7.03	MS9171-54	5.500	4.625	11.10
MS9171-19	1.438	.562	3.75	MS9171-37	3.375	2.500	7.27	MS9171-55	5.625	4.750	11.33
MS9171-20	1.500	.625	3.87	MS9171-38	3.500	2.625	7.50	MS9171-56	5.750	4.875	11.56
MS9171-21	1.562	.688	3.98	MS9171-39	3.625	2.750	7.73	MS9171-57	5.875	5.000	11.78
								MS9171-58	6.000	5.125	12.00

(a) THREAD TO HEAD. MAXIMUM TWO IMPERFECT THREADS.

NOTE: (1) SHANK SHALL BE STRAIGHT WITHIN .003 FIR. PER INCH OF BOLT LENGTH.
(2) THE CONCENTRICITY OF THREAD PD IN RELATION TO THE SHANK SHALL BE WITHIN .006 FIR.
(3) THE CONCENTRICITY OF THE SHANK IN RELATION TO THE WASHER FACE DIAMETER AND 12 POINT OD SHALL BE WITHIN .015 FIR.

MATERIAL: STEEL AMS 6322
HARDNESS: ROCKWELL C26-32
FINISH: BLACK OXIDE TREATMENT AMS 2485
SURFACE ROUGHNESS: AS 291.
MANUFACTURING SPECIFICATION: ARS 7452. PARTS SUBJECT TO MAGNETIC PARTICLE INSPECTION PER AMS 2640.
BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED: TOLERANCES; LINEAR DIMENSIONS ±.010, ANGULAR DIMENSIONS ±5°.
DO NOT USE UNASSIGNED PART NUMBERS.

THIS DOCUMENT HAS BEEN PROMULGATED BY THE DEPARTMENT OF DEFENSE AS THE MILITARY STANDARD TO LIMIT THE SELECTION OF THE ITEM, PRODUCT, OR DESIGN COVERED HEREIN IN ENGINEERING, DESIGN, AND PROCUREMENT. THIS STANDARD SHALL BECOME EFFECTIVE NOT LATER THAN 90 DAYS AFTER THE LATEST DATE OF APPROVAL SHOWN.

THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE.

APPROVED 5 Aug 57 REVISED

CUSTODIAN
Navy - BuAer
Air Force

PROCUREMENT SPECIFICATION
NONE

MILITARY STANDARD

BOLT-MACHINE, STEEL, DRILLED 12 POINT HEAD, .3125-24, BLACK OXIDE

MS9171 (ASG)

SHEET 1 OF 1

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:12Z
Check the source to verify that this is the current version before use.