MS9882

FED. SUP CLASS
5310

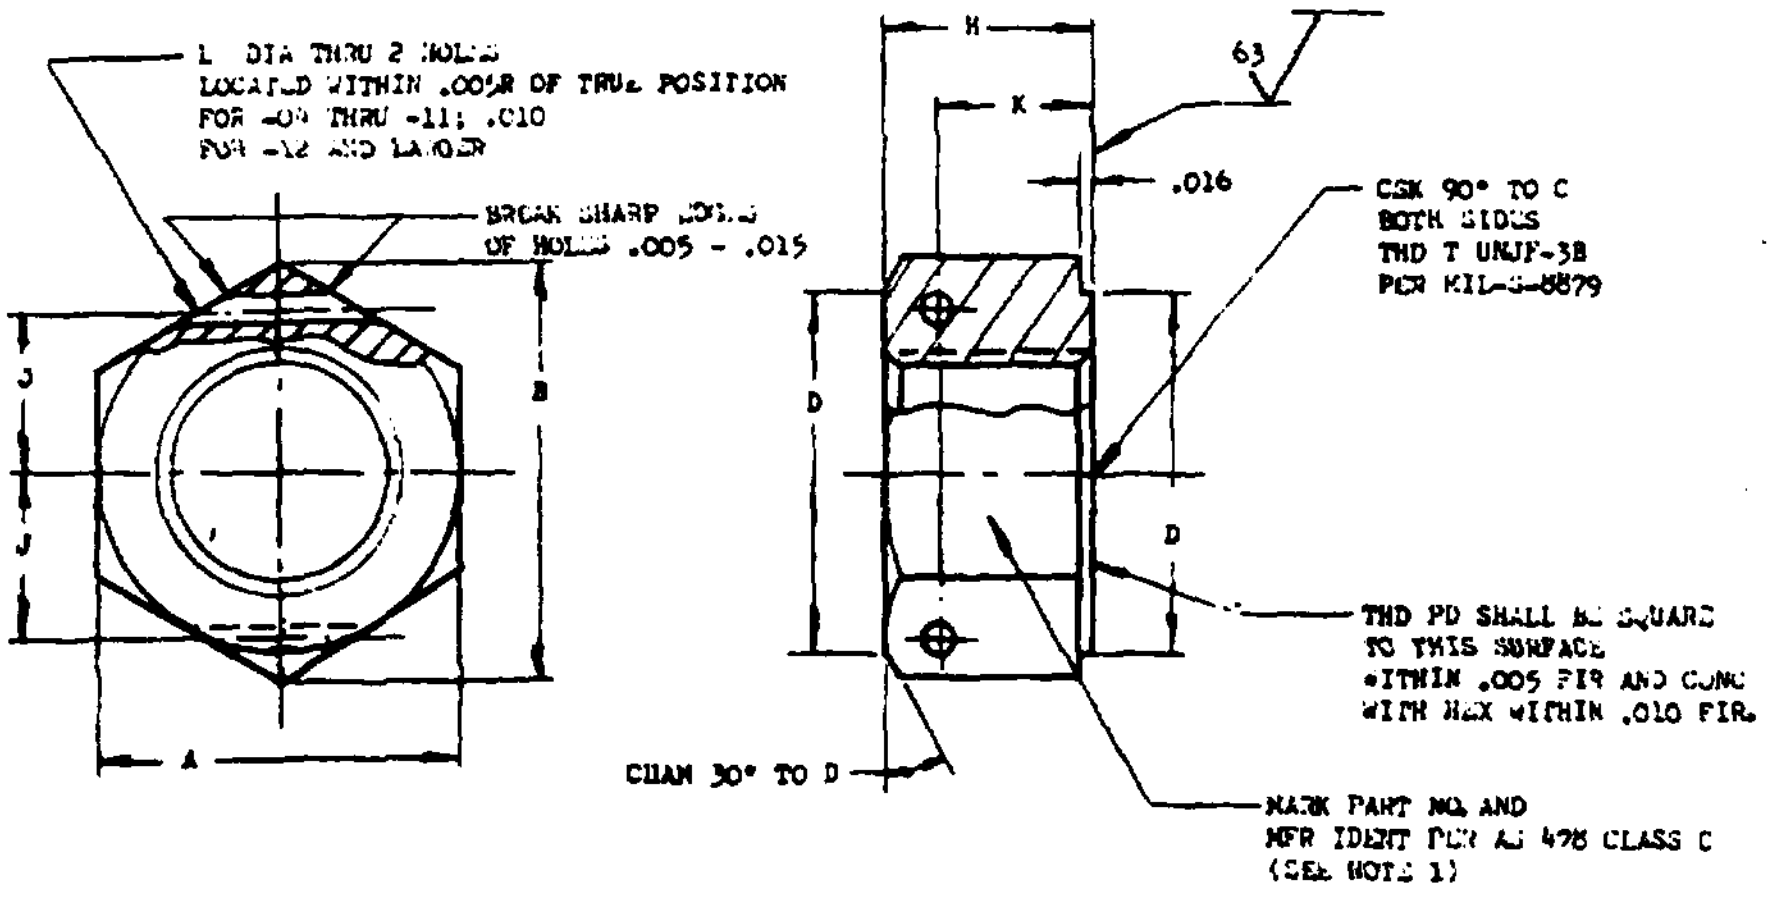

PART NO.	THREAD T	A	B MIN	C DIA +.020 -.010	D DIA	H	J BASIC	K BASIC	L DIA ±.004	APPROX WEIGHT LB/100
MS9882-04	.112-48	.243-.251	.277	.122	.250	.136	.090	.068	.031	.15
MS9882-06	.138-40	.305-.313	.347	.148	.312	.136	.115	.068	.047	.25
MS9882-08	.164-36	.336-.345	.383	.174	.344	.136	.135	.068	.047	.30
MS9882-09	.190-32	.367-.376	.419	.200	.375	.156	.150	.078	.047	.41
MS9882-10	.250-28	.430-.439	.491	.260	.438	.219	.185	.110	.047	.74
MS9882-11	.3125-24	.492-.502	.561	.322	.500	.266	.215	.133	.047	1.11
MS9882-12	.375-24	.553-.564	.631	.385	.562	.328	.245	.164	.047	1.60
MS9882-13	.4375-20	.679-.690	.775	.448	.688	.375	.300	.187	.070	2.87
MS9882-14	.500-20	.741-.752	.846	.510	.750	.438	.335	.219	.070	3.79
MS9882-15	.5625-18	.865-.877	.987	.572	.875	.484	.385	.362	.070	5.94
MS9882-16	.625-18	.928-.940	1.059	.635	.938	.547	.420	.400	.070	7.40
MS9882-17	.750-16	1.052-1.064	1.200	.760	1.062	.656	.490	.485	.070	10.56
MS9882-18	.875-14	1.239-1.252	1.414	.885	1.250	.766	.555	.570	.070	17.32
MS9882-19	1.000-12	1.427-1.440	1.628	1.010	1.438	.875	.655	.655	.070	26.55

1. MULTIPLE MARKING OF BAR STOCK IS PERMISSIBLE PROVIDED POSITIVE IDENTIFICATION IS SHOWN. PARTS SHALL BE MARKED BEFORE THREADING. DASH NUMBERS MAY APPEAR ON ADJACENT FLATS.
2. TRUE POSITION TOLERANCES SPECIFIED ARE FOR MAX MATERIAL CONDITION.
3. MATERIAL: STEEL AMS 6322.
4. HARDNESS: ROCKWELL C26-32.
5. FINISH: CADMIUM PLATE PER AMS 2400. DIMENSIONS SPECIFIED ARE AFTER PLATING.
6. SURFACE TEXTURE: USAS B46.1-1962. UNLESS OTHERWISE SPECIFIED SURFACES TO BE 125 MICROINCHES EXCEPT HEX FACES.
7. MAGNETIC PARTICLE INSPECTION PER AMS 2640 AFTER PLATING.
8. BREAK SHARP EDGES .005 - .015 UNLESS OTHERWISE SPECIFIED.
9. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: LINEAR DIMENSIONS ± .010, ANGULAR DIMENSIONS ± 5°.
10. DO NOT USE UNASSIGNED PART NUMBERS.

CERTAIN PROVISIONS (LIMITS OF SIZE FOR ACROSS-FLATS DIMENSIONS) OF THIS STANDARD ARE THE SUBJECT OF INTERNATIONAL STANDARDIZATION AGREEMENT ASC AIR STD 17/2. WHEN REVISION OR CANCELLATION OF THIS STANDARD IS PROPOSED, THE DEPARTMENTAL CUSTODIAN WILL INFORM THEIR RESPECTIVE DEPARTMENTAL STANDARDIZATION OFFICE SO THAT APPROPRIATE ACTION MAY BE TAKEN RESPECTING THE INTERNATIONAL AGREEMENT CONCERNED.

AS & AMS ARE SOCIETY OF AUTOMOTIVE ENGINEERS, INC. PUBLICATIONS.
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE MILITARY SERVICES BY THE SAE AEROSPACE STANDARDIZATION DIVISION.

Review activities:
USAF - 82, 85

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

APPROVED 27 May 66 REVISED

P.A. USAF-11 **Other Cust** Navy - [illegible] Army - [illegible]	INTERNATIONAL INTEREST	**TITLE** NUT, PLAIN, HEX - DRILLED, AMS 6322, CADMIUM PLATE, MIL-[illegible]	**MILITARY STANDARD** **MS9882**
PROCUREMENT SPECIFICATION NONE		**SUPERSEDES:**	**SHEET** 1 **OF** 1

U.S. GOVERNMENT PRINTING OFFICE: 1966 [illegible]

DD FORM 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:27Z
Check the source to verify that this is the current version before use.