INCH-POUND

A-A-55218

1 JULY 93

COMMERCIAL ITEM DESCRIPTION

SHIRT, WOMEN'S, DRESS, WHITE (SHORT SLEEVE)

The General Services Administration has authorized the use of this Commercial Item Description in preference to MIL-S-87055.

Abstract. This specification covers the requirements for a woman's short sleeve dress shirt, with shoulder epaulets, made of a polyester/cotton blend fabric. Its use is intended for wear by female military personnel of the Navy.

Salient Characteristics. The short sleeve shirt shall be a two-piece princess style front and a one piece back, seven (7) button front closure, breast patch pockets with button down flaps, a convertible collar with collar stays and two (2) shoulder epaulets. The topcollar, top collarstand, top epaulets and top pocket flaps shall be fused.
NOTE: See figures 1 and 2.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Defense Personnel Support Center, Clothing and Textiles Directorate, Attn: DPSC-FSSD, 2800 South 20th Street, Philadelphia, PA 19101-8419, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A

FSC 8410

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

Material.

Patterns. The government shall furnish a single size pattern. The contractor is responsible for grading patterns for additional sizes. The pattern generally provides for a seam allowance of 1/4 inch for joining seams except for the front seam which shall be 3/8 inch. Minor modification are permitted where necessary when using automatic equipment.

Basic Material. The basic material shall be a polyester/cotton blend poplin, plain weave, white shade No. 3013, and the standard sample is piece number 88064. The finished cloth shall match the standard and be equal to or better than the standard sample with respect to all characteristics. The Basic Material shall be tested using all The Federal and Commercial Test Methods listed below.

Table I

Characteristics & Requirements	Test Methods
Fiber Content: 65 ± 5% Polyester 35 ± 5% Combed Cotton	FED-STD-191: 2100
Weight/ from 4.1 to 4.6 oz/sq yd	ASTM D3776-OPT C
Yarns Per Inch Warp 102 Filling 50	ASTM D3775 7/
Breaking Strength (min. lbs.) Warp 120 Filling 50	ASTM D5034-90 1/
Discoloration to: Light Combined Laundering and Bleaching Perspiration Laundering (3 cycles)	FED-STD-191: 5660 1/ 2/ 3/ 5605 5/ 5680 5610 4/ 5/
PH / between 5.0 and 8.0	2811
Dimensional Change/Max. 2%	5556 6/
Seam Efficiency 80% and above	5110 7/

1/ One determination per sample unit and the results shall be reported as "pass" or "fail".
2/ Method 5660 shall be used except that exposure of the specimen standard sample shall be for 20 standard fading hour. Any specimen showing discoloration less than or equal to that of

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

the standard sample shall be rated "satisfactory". Any specimen showing discoloration greater than that of the standard sample shall be rated "unsatisfactory". When no standard sample is available the discoloration of the specimen shall be rated as "excellent", "good", "fair", or "poor", as defined in 5660.
3/ The calibration of the fadeomenter and the definition of AATCC Fading Units shall be according to AATCC Test Method 16-1988. Using the formula below , 16 to 22 AFU's are acceptable as 20 SFH's.

$$\text{AATCC Fading Units} = \frac{(E^{*})\ (20)}{1.7}$$

Where (E) is the color difference in CIELAB units of color difference.
4/ The specimens must be dried after each of the 3 laundering cycles.
5/ Only the stain on the cotton and polyester fibers of the color transfer cloth shall be evaluated.
6/ Cotton laundering procedure shall be followed.
7/ The needle shall be 0.036 (± 0.0010) inch (0.91 ± 0.025 mm) across the blade eye.

Fusible Interlining. The color shall be white. The top collar, top collarstand, top epaulets and top pocket flaps shall be fused with a thickness not greater than 0.030 when tested. A fused sample consisting of the fusible and basic material shall conform to the requirements specified below when tested.

In-process testing requirements

Table II

Characteristic	Test method
Stiffness Initial Warp 13.0 to 38.0 Filling 6.0 to 22.0 After 25 launderings Retain 20 % of initial Stiffness	 FED-STD-191/5206 AATCC-124-1984 AND FED-STD-191/5206 2/
Peel strength Initial / min. 24 oz. After 25 launderings min. 16 oz.	 FED-STD-5951 1/ AATCC 124-1984 AND FED-STD-191/5951 2/
Appearance Initial After 25 launderings 4.0	 VISUAL AATCC-124-1984 AND VISUAL 2/

1/ When a nonwoven fusible is used, the item will be accepted if the fusible either splits from itself rather than separate

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

from the outershell material or if it begins to separate from the outershell material higher than the minimum peel strength and then splits from itself. The minimum shall be 20 oz.

2/ One 15 x 15 inch specimen per 1000 shall be laundered. Wash temperature shall be 140 ± 5 degrees F (60 ± 3 degrees C). Drying shall be performed only after the 25th washing. The evaluation portion of the AATCC test method is not applicable. Pressing of the sample prior to evaluation is prohibited

Fusible Web Tape. The top front shall include a 3/16 (± 1/16) inch wide Polyamide Fusible web conforming to type IX, style B class 1 of MIL-C-44296. The color shall be white.

Threads. The thread shall be polyesters core: Cotton-, Rayon-, or Polyester Covered Cotton. The color shall be White cable no. 66050 conforming to A-A-50199.

Use	Ticket No.	Ply
General seaming/overedging	70	2 or 3
Button and buttonhole	50	2 or 3

Colorfastness. As a limit of acceptability, the thread shall show a minimum of good resistance to colorfastness to light and laundering.

Buttons and Buttonholes. Buttons shall be plastic, size 21 line, and cable white no. 62031. Buttonholes shall be straight style with both ends securely barred with a finished length of 5/8 to 11/16

Collar. Collar center back shall be 1 3/4" ± 1/8" from top edge of the collarstand and the collar points shall be 3-1/4" ± 1/8" from base.

Stays, and Staypieces. The collar stays shall be the special slotted type made of polyethylene terphthalate plastic sheet, and the thickness shall be 0.009 ± 0.0015 inch. The color shall be clear or opaque, and measure not less than 1/4 or more than 3/8 inch wide and 2 1/8 to 2 3/4 inches in length. The special slotted stay shall finish 1 1/2 inch from the point of the finished collar. The collar stay may be inserted in the staypiece, fused at both ends, or stitched through the middle.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

Finished Stitches, Seams, and Stitchings Measurements. All shirts shall be finished with the following measurements and tolerances. Generally, stitch type 301/10-12 stitches per inch for assembling, attaching, setting, topstitching, and hemming shall be used; however, stitches used for multioperations/8-10 stitches per inch may be used if it does not change the furnished measurements, or basic design.

TABLE III

Back stitching	not less than 1/4" at the end of all seams not caught in other seams by stitching
Top Pocket corners may be tacked w/triangle tack	triangle base shall be: 1/8" to 3/16" at the top of pocket triangle apex shall be: 1/2" to 3/4" below the top of pocket
Top Stitching	
Collarstand top	3/16" from turned edge
Collar	1/16" from folded edge
Front to side front	3/16" from folded edge
Pocket to breast	1/16" from folded edge
Pocket Flap	1/16" from folded edge
position (raw edge)	1/2" ± 1/16" from pocket top
stitch	1/8" to 3/16" from raw edge
flap to shirt	5/16" from folded edge
Epaulet	1/16" from folded and pointed edge
Buttonholes	
Top right-1 (horizontal)	5/8" ± 1/16" from finished edge
right front-6 (vertical)	3/4" ± 1/16" from folded edge
Epaulets-2 (Horizontal)	5/16" ± 1/16" from pointed edge
Pocket flaps-1 (vertical)	1/2" ± 1/16" from pointed edge
Finished	
Pocket	4-3/4" ± 1/8" vertical length 4-1/4" ± 1/16" width
Pocket Flaps	4-3/8" ± 1/16" width 1-3/8" ± 1/16" vertical length at sides 2" ± 1/16" vertical length at center
Epaulets widths	1-1/2" ± 1/8" at bottonhole 1-3/4" ± 1/8" at armhole seam
Note: center epaulets with squared end 1/4" ± 1/16 forward of the shoulder seam, and the pointed end 1/4" to 3/8" below the raw edge of the neck line.	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

Sizes and Measurements. The finished shirt shall conform to the measurements below.

Table IV

Ticket Size		A	B	C	D
Bust	Collar	Bust	Length	Sleeve Length	Collar
32	12	37-3/4	27-1/8	4-1/4	12
32	13	37-3/4	27-1/2	4-1/4	13
34	12	39-3/4	27-1/8	4-1/4	12
34	13	39-3/4	27-1/2	4-1/4	13
34	14	39-3/4	27-7/8	4-1/4	14
34	15	39-3/4	28-1/4	4-1/4	15
36	13	41-3/4	27-1/2	4-1/4	13
36	14	41-3/4	27-7/8	4-1/4	14
36	15	41-3/4	28-1/4	4-1/4	15
38	13	43-3/4	27-1/2	4-1/4	13
38	14	43-3/4	27-7/8	4-1/4	14
38	15	43-3/4	28-1/4	4-1/4	15
38	16	43-3/4	28-5/8	4-1/4	16
40	14	45-3/4	27-7/8	4-1/4	14
40	15	45-3/4	28-1/4	4-1/4	15
40	16	45-3/4	28-5/8	4-1/4	16
42	15	47-3/4	28-5/8	4-1/4	15
42	16	47-3/4	28-5/8	4-1/4	16
Tolerances		±1/2	±1/2	±1/4	±1/4

NOTE: Refer to figure 1 and 2 for A, B, C, D. All measurements shall be taken with the shirt buttoned, laid flat and smooth.

A. Bust. Twice the measurement taken across the front at the base of the armhole from folded edge.

B. Back Length. Back length shall be taken along the center of the back from the under collar seam to the bottom of the shirt.

C. Sleeve Length. Measurement shall be taken along the inseam, from underarm seam to bottom edge of sleeve.

D. Collar. Measurement shall be taken from between the end points of the junction of the collar and the collarstand, with the collar in flat position.

Label/Marking. The label/marking shall be as follows:

Size stamp will be indicated as follows;
34B-15N (example)
Stock number-8410-00-000-0000 (example)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

Combination Label shall be centered and stitched to left front facing on inside of shirt around all four sides, 1/8 to 3/16 inch from the edge. The label shall finish face side up, with the top edge parallel to the folded front edge of facing and the side edge approximately 1 t 2 inches from the bottom edge of shirt. All of the printing shall be clearly visible.

NAME:
SERVICE NO:
SHIRT, WOMAN'S, DRESS, WHITE (SHORT - SLEEVE)
FIBER CONTENT: POLYESTER (65%) - COTTON (35%)
CONTRACT NO: DLA 100-00-0-0000
NAME OF MANUFACTURER: (if other than the contractor)

LAUNDERING INSTRUCTIONS

Machine Wash, Hot water
Tumble Dry, Medium Heat
Remove immediately, or use
NAVEDTRA 414-01-45-81,
NAVY FORMULA I

Product Demonstration Model. When required, offerers shall submit samples of their intended production. The Product Demonstration Model will consist of units independently developed. Product Demonstration Models will be analyzed and evaluated by the government. Evaluation criteria and basis for award are contained in the solicitation. Product Demonstration Models will be retained by the government. One (1) Product Demonstration Model approved by DPSC under the resultant contract will serve as a manufacturing standard for the corresponding production items delivered under this contract. Offerers are advised that the Product Demonstration Model does not relieve the successful offerer of his responsibility to perform in accordance with the Commercial Item Description specified above.

Regulatory Requirements. The offeror/contractor is encouraged to use recovered materials in accordance with Public Law 94-580 to the maximum extent practicable.

Quality Assurance

Certification. The contractor shall certify that the product offered meets all the characteristics of this commercial item description and that the product conforms to the producer's own drawings, specifications, standards and quality assurance practices. The government reserves the right to require proof of such conformance prior to the first delivery and thereafter as may be otherwise provided for, under the provisions of the contract. Reliance on contractor QA systems shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the government for acceptance comply with all requirements of the contract.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

Examination. The shirt lots shall be inspected in accordance with "Sampling Procedures and Tables for Inspection by Attributes", ANSI/ASQC Z1.4, published by the American Society for Quality Control.

Visual Examination. The shirts shall be examined for the defects listed below. The lot size shall be expressed in units of 100. The sample unit is one shirt. The inspection level shall be II and the acceptable quality level (AQL), expressed in terms of defects per hundred units, shall be 6.5.

Defects. The shirts shall be examined for defects in design, materials, and workmanship according to using MIL-STD-1492C.

Dimensional Examination. The finished shirt shall conform to the dimensions specified. Any dimension that is not within the established tolerance shall be classified as a defect. The sample unit shall be one; the inspection level shall be S-3 and the AQL, expressed in terms of defects per hundred units, shall be 2.5.

Packaging Examination. The fully packaged shipping containers shall be examined in accordance with defects listed below. The lot size shall be the number of shipping containers in the inspection lot. The inspection level shall be S-2 and AQL, expressed in terms of defects per hundred units, shall be 1.0.

EXAMINE	DEFECT
Marking (exterior and interior)	Omitted; incorrect; illegible; of improper size, location, or method of application
Materials	Any component missing, damaged, or not as specified
Workmanship	Inadequate application of components, such as: incomplete closure of container flaps, loose strapping, improper taping, or inadequate stapling
Content	Number of items in container is more or less than required
	NSN shown on one or more items not as specified on shipping container

Source: https://assist.dla.mil - Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

Palletization	Length, width, or height exceeds specified maximum requirements
	Pallet type not as specified
	Load not bonded as specified

Preservation, Packing, and Marking. The preservation, packing, and marking shall be as specified in the contract or order.

Source of Government Documents. Copies of Military and Federal documents are available for:

A-A-50199 - THREAD, POLYESTER CORE, COTTON- OR POLYESTER COVERED

MIL-C-44296 - CLOTH, FUSIBLES

MIL-STD-191 - FEDERAL TEST METHOD STANDARDS

MIL-STD-1492C - MILITARY STANDARD; PROVISIONS for EVALUATING QUALITY of MEN'S SHIRTS

Standardization Documents Order Desk
Bldg. 4D
700 Robbins Avenue
Philadelphia, PA 19111-5094

Sources of Nongovernment Documents.

ANSI/ASQC Z1.4 - Sampling Procedures and Tables For Inspection By Attributes

(Applications for copies should be addressed to American National Standards Institute, 11 West 42nd Street, New York, NY 10036-8002.)

AATCC - 16 - Colorfastness

AATCC - 124 - Appearance of Durable Press

(Applications for copies should be addressed to American Association of Textile Chemists and Colorists (AATCC), P.O. Box 12215, Triangle Park, NC 27709-2215)

ASTM D3775 - Yarns Per Inch (Woven)

ASTM D3776 OPTION C - Weight

ASTM D5034-90 - Breaking Strength (Grab)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

(Applications for copies should be addressed to American Society For Testing and Materials, 1916 Race Street, Philadelphia, PA 19103-1187.)


Custodian:
NAVY - NU


Civil Agency Coordinating Activity:
GSA - FSS

Preparing Activity:
DLA - CT

Project No.
8410 - 0806

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

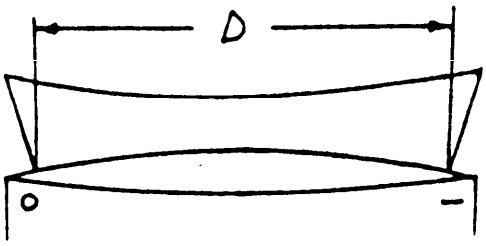

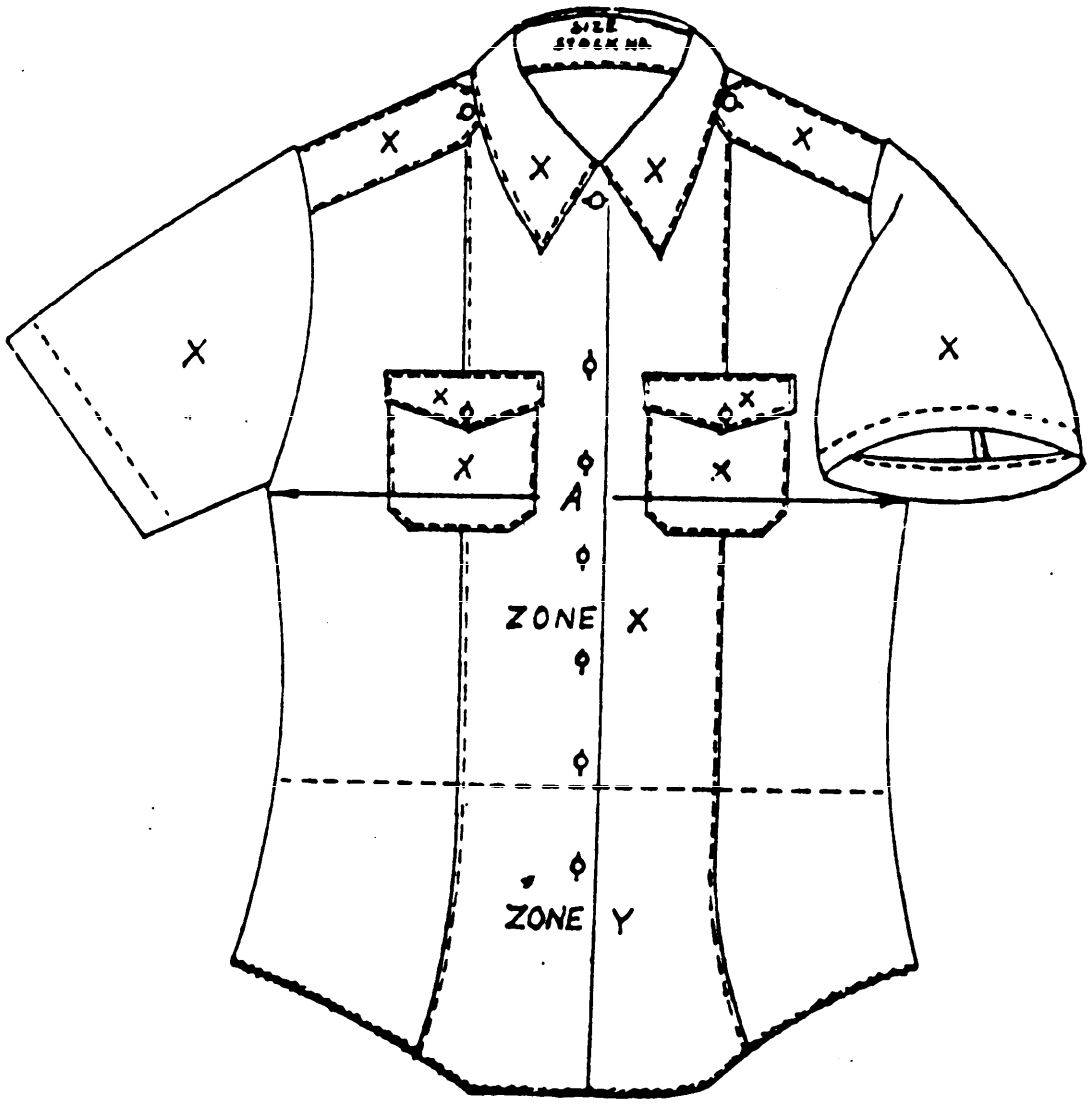

FRONT VIEW

ZONES X AND Y (DEFECT AREAS) SHALL APPLY ONLY TO THE OUTSIDE FRONT AND BACK AS ILLUSTRATED

FIG. 1 - SHIRT, WOMAN'S, DRESS, WHITE (SHORT SLEEVE)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

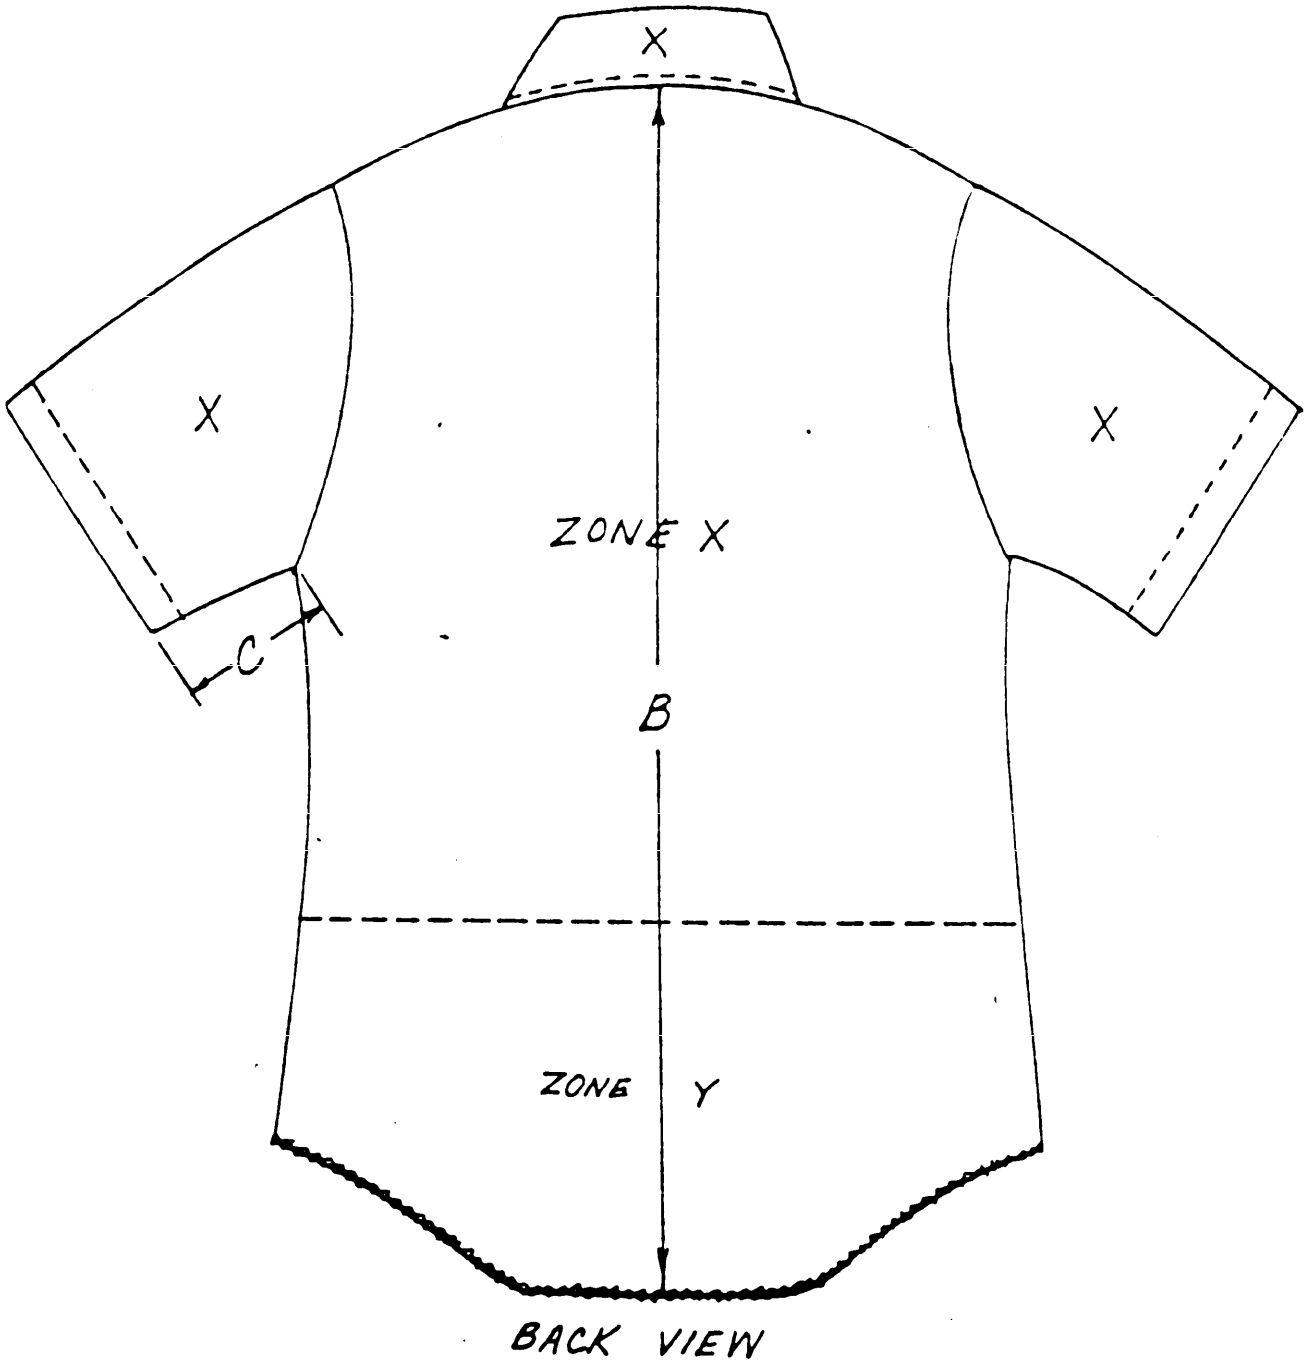


FIG. 2 - SHIRT, WOMAN'S, DRESS, WHITE (SHORT SLEEVE)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:44Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	A-A-55218	1993 JULY 1

3. DOCUMENT TITLE
Shirt, Women's, Dress White (Short Sleeve)

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME Defense Personnel Support Center ATTN: DPSC-FSSD (12-3-D)	b. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON
c. ADDRESS (Include Zip Code) 2800 South 20th Street P. O. Box 8419 Philadelphia, Pennsylvania 19101-8419	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340

DD Form 1426, OCT 89 *Previous editions are obsolete.* 198-290

Source: https://assist.dla.mil -- Downloaded: 202610-26T09:44Z
Check the source to verify that this is the currentversion before use.