
NOTE: This drawing was approved by joint action of the Air Force and Navy Departments on the Air Force-Navy standard for this product. This drawing supersedes all conventional standard drawings for the same product and shall become effective for the procurement of conventional supplies, or for use in new design, not later than 6 months after the issued date of approved change.

1. When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

ACCESSORY SHALL BE CAPABLE OF SATISFACTORY OPERATION WITH THE PITCH DIAMETER CENTER OF THE DRIVE SPLINE DISPLACED TO A MAXIMUM .006 IN ANY DIRECTION FROM THE CENTER DEFINED BY THE 1.499 PILOT DIAMETER AND OUT OF SQUARE WITH MOUNTING FACE .005 FULL INDICATOR READING. SPLINE SHAFT SHALL BE RETAINED IN THE ACCESSORY WHEN THE LATTER IS REMOVED FROM THE ENGINE

(1) DRAIN BOSS IN ACCORDANCE WITH AN610050 FOR .250 TUBING WITH PLUG AN814-4 AND GASKET AN6290-4 SIZE. 4 REQUIRED, WHEN SPECIFIED IN ACCESSORY SPEC

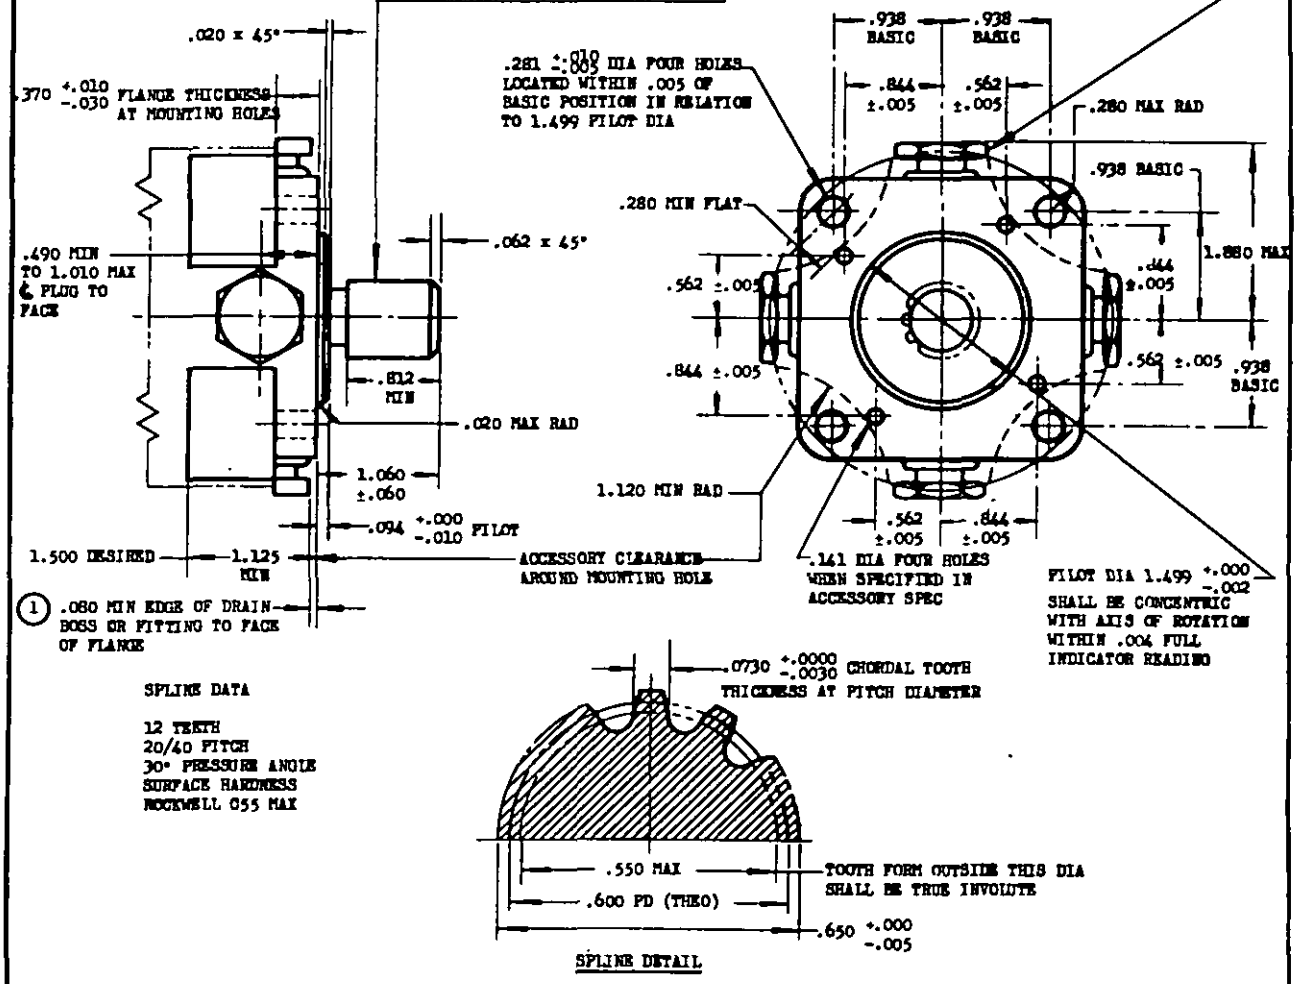

SPLINE DATA

12 TEETH
20/40 PITCH
30° PRESSURE ANGLE
SURFACE HARDNESS
ROCKWELL C55 MAX

SPLINE DETAIL

FLANGE OUTLINE AS DIMENSIONED IS A BASIC MAXIMUM AREA REQUIREMENT.

THE ACCESSORY SHALL OPERATE SATISFACTORILY WITH OIL LEAKAGE FROM THE ENGINE INTO THE PILOT COMPARTMENT NOT EXCEEDING 2 CC PER HOUR. ACCESSORY CONTAINING DRIVE SHAFT SEALS TO PREVENT LEAKAGE OF FLUID FROM THE ACCESSORY SHALL BE PROVIDED WITH DRAIN BOSSES AS SHOWN CONNECTED TO THE PILOT COMPARTMENT BETWEEN THE ENGINE SEAL AND THE ACCESSORY SEAL.

(1) WHEN THE ACCESSORY IS OPERATING AT A SPEED OF 1300 TO 4125 RPM THE ENGINE WILL FLOW A MIN OF .25 GPH OF OIL TO ONE OIL HOLE AT A MINIMUM PRESSURE OF 5 PSI AND NOT EXCEEDING 70 PSI IF FLOW IS REDUCED BELOW .25 GPH TO .05 GPH.

SPEED: NORMAL RATED SPEED SHALL BE 3750 RPM.

ROTATION: DIRECTION CLOCKWISE AS VIEWED FROM OPPOSITE THE DRIVE END.

STRENGTH: THE ACCESSORY SHALL PROVIDE A SHEAR SECTION THAT SHALL FAIL AT A TORQUE BELOW 725 LB-IN.

FOR DETAIL OF TYPE X ENGINE DRIVE SEE AND20000.

REMOVE ALL BURRS AND SHARP EDGES.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.010, ANGLES ±2°.

(1) THIS DRAWING AND THE APPLICABLE ACCESSORY SPECIFICATIONS, TOGETHER, COMPLETELY DEFINE THE DESIGN REQUIREMENTS.

(2) NORMAL USE OF THIS FLANGE IS FOR LOW SPEED FLUID POWER PUMPS.

AMENDMENT (1) 4 MAY 53 REVISED 1 Aug 49

AIR FORCE-NAVY AERONAUTICAL DESIGN STANDARD

FLANGE — TYPE X ACCESSORY MOUNTING

AND10260

NOT A PART NUMBER

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:29Z
Check the source to verify that this is the current version before use.