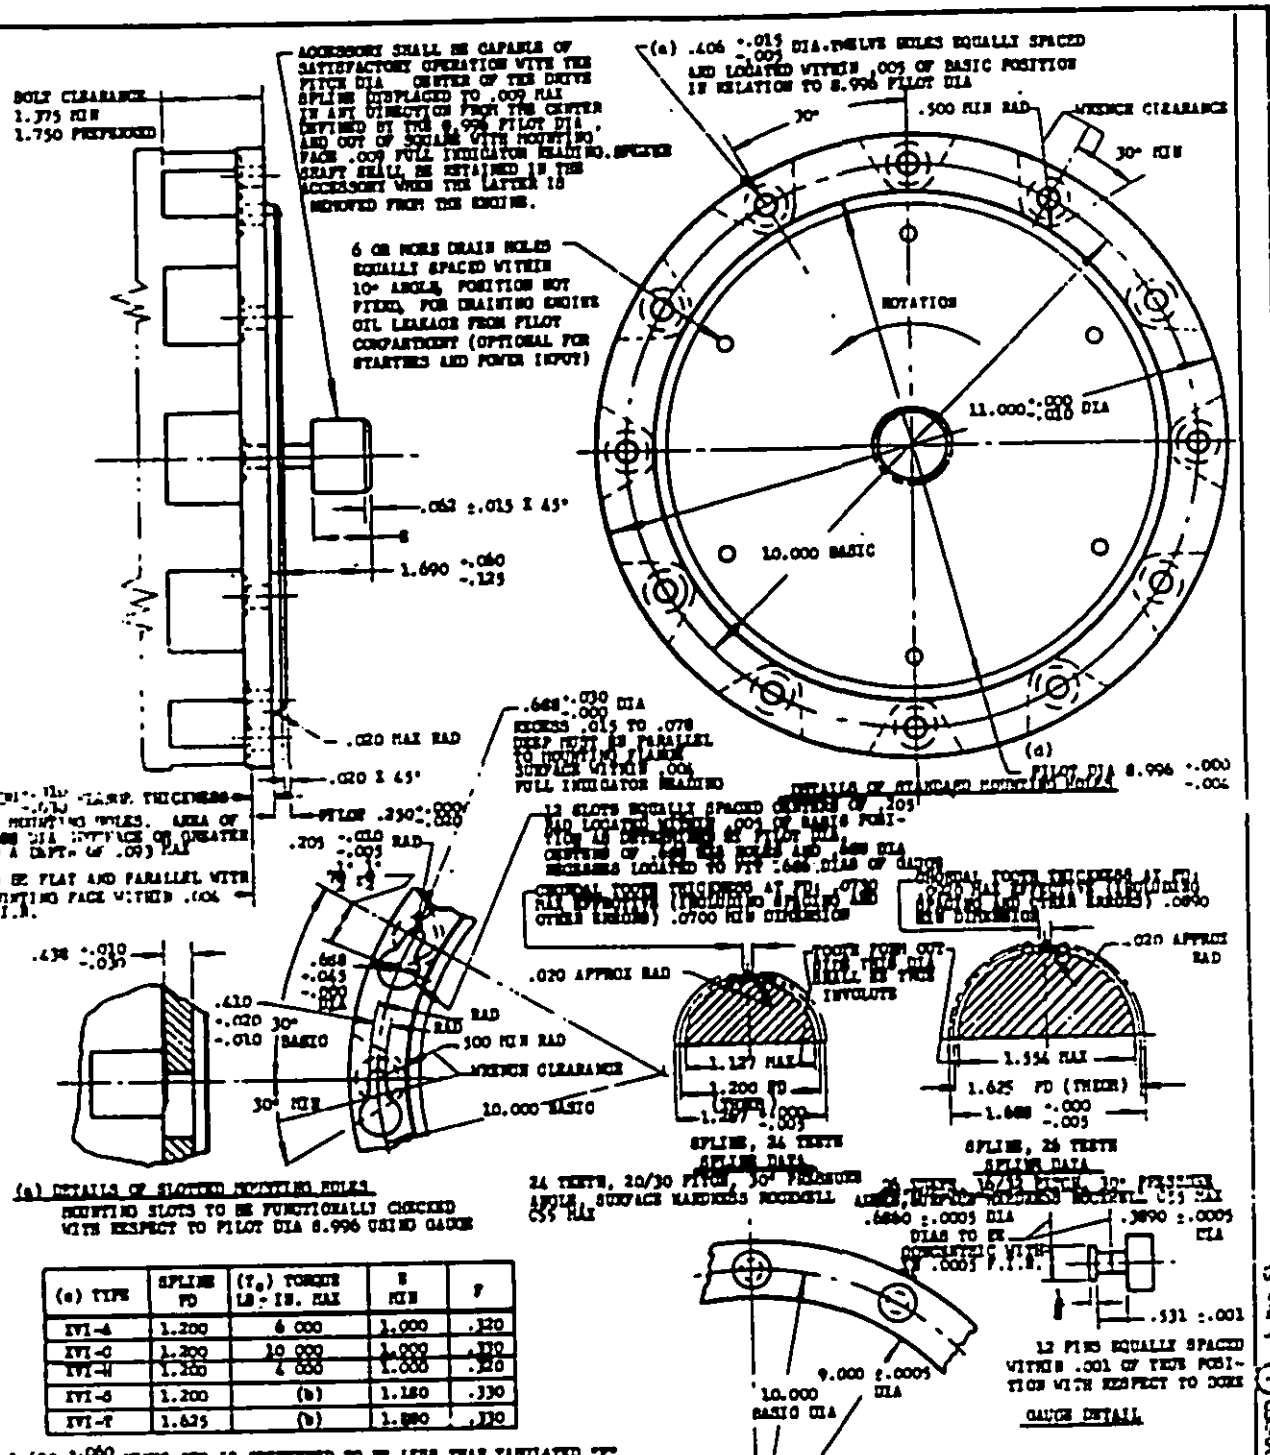


(a) TYPE	SPLINE PD	(T_a) TORQUE LB-IN. MAX	E MIN	F
XVI-A	1.200	6 000	1.000	.320
XVI-C	1.200	10 000	1.000	.320
XVI-H	1.200	4 000	1.000	.320
XVI-G	1.200	(b)	1.180	.330
XVI-F	1.625	(b)	1.880	.330

1.690 +.060 -.125 DIMEN "E" IS PREFERRED TO BE LESS THAN TABULATED "F"

(a) WHEN SPECIFIED IN THE ACCESSORY SPECIFICATION, THE TWELVE .406 STARTER MOUNTING HOLES AND CLEARANCE SHALL BE REPLACED WITH SLOTTED MOUNTING HOLES. DIRECTION OF SLOTS TO BE RELATED TO OPPOSE THE MAXIMUM TORQUE WITH THE .205 RADIUS.
(b) STARTERS SHALL PROVIDE A TORQUE LIMITING DEVICE AS SPECIFIED IN THE STARTER SPECIFICATION.
(c) ACCESSORY FLANGE TYPE NUMBERS APPLY TO SPLINE DRIVE TYPE NUMBERS AS INDICATED ON DRAWING AND10030.
FLANGE OUTLINE AS DIMENSIONED IS A BASIC MINIMUM AREA REQUIREMENT.
THE ACCESSORY SHALL OPERATE SATISFACTORILY WITH OIL LEAKAGE FROM THE ENGINE INTO THE PILOT COMPARTMENT NOT EXCEEDING 300 PER HOUR.
ROTATION: CLOCKWISE AS VIEWED FROM OPPOSITE THE DRIVE END.
STRENGTH: THE ACCESSORY SHALL PROVIDE A SHEAR SECTION THAT SHALL FAIL AT A TORQUE BELOW (T_a).
REMOVE ALL BURRS AND SHARP EDGES.
FOR DETAIL OF TYPE XVI SPLINE DRIVE SEE AND10006.
THIS DRAWING AND THE APPLICABLE ACCESSORY SPECIFICATIONS, TOGETHER, COMPLETELY DEFINE THE DESIGN REQUIREMENTS.
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.010, ANGLES ±2°.
SHALL END OF THIS FLANGE FOR STARTERS, GENERATORS, AND POWER TAKE-OFF.
(1) ENTIRE DRAWING REVISED.

APPROVED 1 MAY 53 (1) 6 MAY 53

AIR FORCE-NAVY AERONAUTICAL DESIGN STANDARD

FLANGE TYPE XVI ACCESSORY MOUNTING

AND10266

NOT A PART NUMBER

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:29Z
Check the source to verify that this is the current version before use.