INCH-POUND

A-A-50721A
20 January 2004
SUPERSEDING
A-A-50721
15 January 1990

COMMERCIAL ITEM DESCRIPTION

SCALE, WEIGHING, CARGO/PALLET

The General Services Administration has authorized the use of this commercial item description for all federal agencies.

1. SCOPE. This Commercial Item Description (CID) covers the characteristics for a rugged, environmentally protected, commercial type weighing scale with a nominal inaccuracy of +/- 0.1% of applied load. The scales covered by this CID are intended for weighing various items found in a warehouse as well as palletized cargo.

2. CLASSIFICATION

2.1 The weighing systems shall be of the following types:

Type I: 11,000lb. pallet scale
Type III: 5,000lb. cargo scale

2.2 Part or Identifying Number (PIN). The following part or identifying numbering procedure is for government purposes and does not constitute a requirement for the contractor.

Example of reference part number: AA50721-1

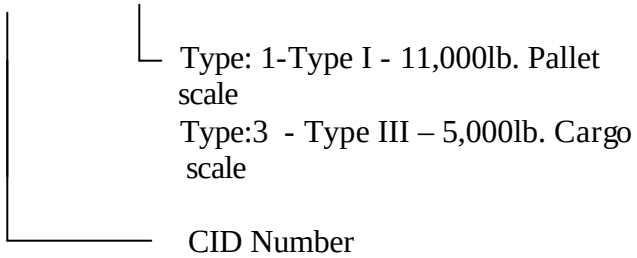

PIN AA50721-1 would identify a Type I – 11,000lb. pallet scale.

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any other data which may improve this document should be sent to: Warner Robins Air Logistics Center, WR-ALC/LEEE, Robins AFB 31098-1611.

AMSC N/A FSC 6670

.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:46Z
Check the source to verify that this is the current version before use.

3.0 SALIENT CHARACTERISTICS.

3.1 Commercial item. The weighing device, herein referenced to as scale, shall be the same product offered by the contractor in the commercial marketplace for at least one year preceding the solicitation. Minor changes to the commercial product, with respect to ruggedizing and environmental suitability and protection shall be permitted, subject to the approval of the procurement office, to satisfy the requirements of this CID. All sections of this CID apply to each type of scale unless specific specifications have been noted. The scale shall be fully electronic using shear beam load cells. The scale shall perform an analog to digital conversion. The calibration data shall be stored at the scale indicator. This allows for interchangeability of indicators that accept the digital output and be of the same make and model (ref 3.7)

3.2.1 Type I. The scale shall be floor mounted. The platform must be conveyorized for roll on and roll off of fully loaded aircraft pallets. The platform shall be a minimum of 108 $in.^2$ but no more than 120 $in.^2$. Platform height shall be adjustable from 18in. to 22in. These dimensions are provided for information only; alternative dimensions may be used. The scale shall have a machined anti – skid walkways if needed.

3.2.2 Type III. The scale shall be large enough to accommodate cargo without requiring additional base supports. The following dimensions are required to properly weigh cargo in the warehouse; overall dimensions including the weighing surface are 4 feet W x 5 feet L. These dimensions are provided for information only; alternative dimensions may be used. The scale shall have a machined anti – skid base and top. The scale shall be NTEP Class III/IIIL certified to 5,000 divisions by the National Institute of Standards and Technologies (NIST) (ref. 2003 NIST Handbook 44).

3.2.2.1 Ramps. The Type III scales shall be supplied with two (2) ramps that are easily detachable from the scale. The ramps shall be durable enough to withstand rated capacity and overload protection of the scale.

3.3 Scale Performance.

3.3.1 Type I. The current performance range for the Type I scale shall be 0 to 11,000lbs. Alternatives shall be considered as long as the alternative exceeds the current performance range.

3.3.2 Type III. The current performance range for the Type III scale shall be 0 to 5,000lbs. Alternatives shall be considered as long as the alternative exceeds the current performance range.

3.4 Scale Accuracy. The indicated weight shall be repeatable with the indicating weight inaccuracy not exceeding +/- 0.1% of the applied load.

3.5 Overload. The scale shall be capable of withstanding 1.5 times the rated capacity without sustaining structural damage or permanent degradation of performance.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:46Z
Check the source to verify that this is the current version before use.

3.6 Power. The scale shall be powered via the indicator by commercially available 110/220/240 VAC, 50/60 Hz and/or 12 VDC power. A 20ft. power supply cable shall be provided with the scale.

3.7 Scale Indicator. The scale shall contain a digital display at least 0.5 inches in height and with a back light to improve visibility. Individual push button controls for zero, peak hold, and accumulation shall be included on the keypad. The indicator shall be configurable to receive a digital output from the scale to enable interchangeability with any scale of the same make and model without having to perform calibration. The indicator shall provide an output capable for interfacing with computers.

3.7.1 Peak Hold. The peak hold mode shall indicate the maximum applied load.

3.7.2 Accumulation. The accumulation mode enables the Scale to weigh multiple loads in series and provide a total of all loads on completion.

3.7.3 Indicator Display Features. The indicator shall be capable of displaying primary/secondary unit configurations in lbs., and kg. The indicator shall allow the user to set, display and clear tare weight, display gross or net weight, and transmit data to a printer or a remote display. The indicator shall be weatherproof or in a weatherproof container.

3.7.4 Indicator mounting stand. An indicator mounting stand shall be included with each kit ordered.

3.8 Tilted position. The scale shall be accurate when operated out of level up to and including 5 percent (approximately three degrees).

3.9 Transportability. The scale shall be designed for easy transporting by forklifts and pallet trucks.

3.10 Environmental conditions.

3.10.1 Temperature. The scale and indicator shall operate repeatable with the inaccuracy specified in 3.4 over a temperature range of -40^{O} Fahrenheit (F) to +125^{O} F (-4.4^{O} Celsius (C) to +51.6^{O} C) for operation and -60^{O} F to +160^{O} F (-15.5^{O} C to + 71.1^{O} C) for storage.

3.10.2 Water. The scale and indicator shall be waterproof.

3.10.3 Dust. The scale and indicator shall be dustproof.

3.10.4 Humidity. The scale and indicator shall be capable of withstanding relativity humidity's up to 100%.

3.10.5 Corrosion control. The scale shall be constructed of corrosion resistant materials and shall be suitably protected against corrosion.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:46Z
Check the source to verify that this is the current version before use.

3.11 Repair and calibration. The scale and indicator shall be designed so that minor repair and calibration can be performed at the field level.

3.11.1 Type I calibration. There is nothing precluding the use of NIST traceable weights on a non NTEP scale.

3.11.2 Type III calibration. The weights and/or calibration equipment used to calibrate the type III scales shall be traceable to NIST. The type III scales shall be calibrated on an annual schedule. A calibration sticker shall be placed on the type III scales and shall show the date of calibration, calibration due date, and the initials and stamp of the person calibrating the scale.

3.12 Service life. The scale and indicator shall be designed for a minimum service life of 8 years.

4.0 REGULATORY REQUIREMENTS

4.1 The offerer/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation.

5.0 PRODUCT CONFORMANCE PROVISIONS

5.1 Product Conformance. The products provided shall conform to the producer's own drawings, specifications, standards, and quality assurance practices and be the same product offered for sale in the commercial market. The government reserves the right to require proof of such conformance. Minor changes to the commercial product, with respect to ruggedizing and environmental suitability and protection shall be permitted, subject to the approval of the procurement office, to satisfy the requirements of this CID.

5.1 Installation and Demonstration. If required by the end user, the contractor shall be responsible for user orientation of the equipment at the designated Air Force facility demonstration that the equipment is ready for use. Installation and demonstration is projected to take one day. The cost for user orientation shall be at no additional cost to the government.

5.2 Market Acceptability. The following market acceptability criteria are necessary to document the quality of the product to be provided under this requirement.

5.2.1 The manufacturer of the item shall have been producing a product meeting these requirements for at least 2 years.

5.2.2 The manufacturer of the item shall have sold at least 250 units meeting these requirements to the government and or the commercial market over the last 2 years.

5.3 Alternative offers. A current, complete instrument with all items required for use, shall be offered/provided. If an alternative/replacement item is offered, descriptive literature (commercial catalogs, specification sheets, etc.) shall be submitted with the quote, for review and evaluation by the cognizant engineer who will coordinate qualifying the instrument with the end

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:46Z
Check the source to verify that this is the current version before use.

user and or applicable engine program office. If the instrument has not been purchased previously by the government and meets the evaluation process, the instrument shall be subjected to functional testing prior to final approval by the government.

5.4 Serviceability, Reliability, and Quality of Materials

5.4.1 One copy of the commercial operation and maintenance manual(s) shall be shipped with the equipment. One additional copy of the operation and maintenance manual shall be shipped to the cognizant engineer at no additional cost to the government. The address for the cognizant engineer is found in 5.5.2.

5.5.2 All supplied items shall carry a standard commercial warranty on parts and labor. Information on warranty duration and expiration date, conditions and point of contact shall be shipped with each unit. One additional copy of the warranty information shall be shipped to the cognizant engineer at no additional cost to the government. The address for the cognizant engineer is; FSC 6670 Engineer, WR-ALC/LEEE, 295 Byron Street, Robins AFB, GA 31098-1611.

6.0 PACKAGING

6.1 Packaging. Packaging and packing shall be packaged and packed as required in the contract.

6.2 Marking. The scale shall be marked in accordance with MIL- STD-130. The scale rated capacity shall be marked on the unit. If the weight exceeds 37 pounds, the weight shall be marked on the unit.

7.0 NOTES.

7.1 Acquisition Requirements. Acquisition documents must specify the following;

7.1.1 Title, number, and date of this commercial item description.

7.1.2 Preservation and packaging requirements (see 6.0).

7.2 Technical Manuals. The requirement for technical manuals should be considered when this CID is applied on a contract. The technical manuals must be acquired under a separate contract line item in the contract.

7.3 Key Words:

Low profile cargo, scale

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:46Z
Check the source to verify that this is the current version before use.

7.4 Reference to Type II. Type II, 11,000 Pound Capacity, Direct Reading, Beam Type Weight Indicator is no longer available for procurement.

7.5 Source of Documents.

7.5.1 NIST/NTEP Class IIIL. Specifications, tolerances, and other technical requirements for weighing and measuring devices, NIST Handbook 44, 2003 edition may be ordered from U.S. Government Printing Office, Stop SSOP, Washington, D.C. 20402-0001, Telephone (202)512-1800 or via internet at www.nist.gov (Publications).

7.5.2 Other. MIL-STD-130 "Identification Marking of U.S. Military Property" may be obtained from the Standardization Documents Order Desk, Building 4D, 700 Robbins Ave., Philadelphia, PA 9111-5094, (215) 697-1187, FAX (215) 697-2978, or Customer Service (215) 697-2667/2179.

7.4 Suggested Sources of Supply.

7.4.2 Type I sources.

Suggested Source(s)

Intercomp
14465 23rd Avenue
Minneapolis, MN 55447-3438

International Weighing Systems
9885 Mesa Rim Road, Suite 128
San Diego, CA 92121

7.1.3 Type III sources.

Suggested Source(s)

Fairbanks Scales, Inc.
3075 McCall Drive, Suite 9
Doraville, GA 30340

Intercomp
14465 23rd Avenue
Minneapolis, MN 55447-3438

MTI Weigh Systems
33 Mainsail Drive
North Kingstown, RI 02852

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:46Z
Check the source to verify that this is the current version before use.

Rice Lake Weighing Systems
230 West Coleman Street
P.O. Box 272
Rice Lake, WI 54868-0272

Transcell Technology, Inc.
35 Waltz Drive
Wheeling, IL 60090

MILITARY INTERESTS:

Custodian:
Air Force - 99

Preparing Activity:
Air Force - 84

Agent:
Air Force – 99

(Project 6670-0224)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:46Z
Check the source to verify that this is the current version before use.