INCH-POUND
A-A-50728A
21 April 2010
SUPERSEDING
A-A-50728
1 January 1988

COMMERCIAL ITEM DESCRIPTION

FREQUENCY SELECTIVE LEVELMETER AND SPECTRUM DISPLAY (FSLSD)

The General Services Administration has authorized the use of the Commercial Item Description.


1. SCOPE.

1.1 Scope. This Commercial Item Description (CID) describes a frequency selective levelmeter and frequency selective levelmeter with spectrum display. This CID is meant as a minimum requirement for the equipment, in either configuration, and only those manufacturers that meet or surpass the requirements herein are qualified per this CID. The frequency selective levelmeter and/or spectrum display is referenced as a FSLSD, the equipment, or the test equipment.

2. CLASSIFICATION.

2.1 Classification. Equipment covered by this CID may be commercially available equipment modified to the extent necessary to meet the following description; the equipment shall be type III, class 5, style F and color R in accordance MIL-PRF-28800. This CID makes provisions for the bid sample testing in accordance with Mil-PRF-2880.

2.2 Part Numbering. The configuration will be referenced as follows:

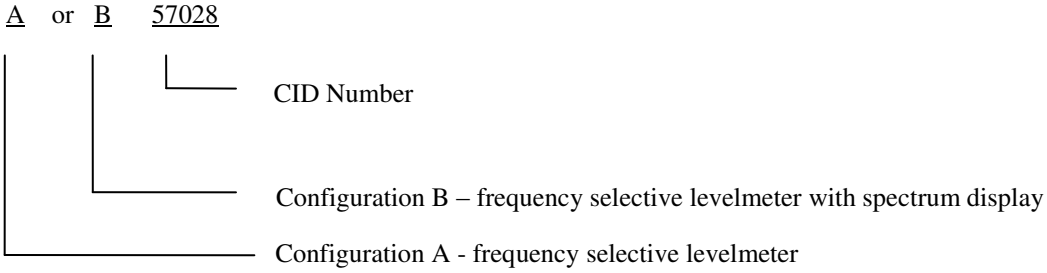

3. SALIENT CHARACTERISTICS.

The equipment shall be capable of operation within the accuracies, limits and specifications herein.

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any other data that may improve this document should be sent to 642 CBSG/GBEC, 460 Richard Ray Blvd, Suite 200, Robins AFB, GA 31098-1813. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at https://assist.daps.dla.mil .

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:46Z
Check the source to verify that this is the current version before use.

3.1 Safety. The equipment shall be UL (Underwriters Laboratories) listed and approved and/or shall comply with the type III safety requirements of Mil-PRF-2880.

a. Leakage current protection. Protection shall be provided from leakage current in excess of 3.5 mA rms (AC and DC) from any accessible conductive parts of equipment (including control shafts with knobs broken or removed and recessed calibration or adjustment controls) to either pole of the power source for any position of the power switch(es).
b. Radio frequency interference (RFI) capacitors. Any capacitor used in RFI filters shall be rated for at least four ($) times the operation voltage.
c. Type III ventilation openings.

1. Ventilation openings shall be designed to prevent accidental contact with live electrical circuits and mechanical moving parts.
2. Top ventilation openings shall incorporate small mesh screening or similar design to prevent the expulsion of hot electronic particles due to failure of electronic devices such as capacitors.

3.2 Parts, materials, and processes. Except for marking, the FSLSD shall comply with the type III parts, materials, and process requirements of Mil-PRF-28800. Nonstandard parts approval requests shall be in accordance with MIL-PRF-28800. Front panel marking shall be in accordance with MIL-PRF-28800.

a. Restricted material. The equipment shall comply with the restricted material requirements of Mil-PRF-28800, including the requirement for mercury and radioactive materials, and shall contain no combination of materials which cause deterioration of any material contained in the equipment due to the effects of outgassing.

3.3 Design and construction. Unless otherwise specified herein, the equipment shall comply with the type III design and construction requirements of Mil-PRF-28800**.** The equipment shall be of solid-state construction. Encapsulation and embedment (potting) of subassemblies may be used only for high voltage circuits where construction is susceptible to leakage or corona, indicators and associated controls shall be in close proximity to each other, all potentiometer controls shall have at least a 270 degree rotation range (4.71 radians).

a. Type of construction. Construction of the FSLSD shall be of a monolithic or a separate component design.
b. Modular design restrictions. The modular design concept for the FSLSD is acceptable with the following restrictions:
   1. The FLSD shall consist of a single unit with one or more separate modules.
   2. Each module shall contain a power circuit protection fuse.
   3. Each module plug-in card shall be keyed and mated with the back plane receptacle so that modules may not be randomly placed into the mainframe.
   4. Modules shall not be removable by access through the front or rear of the mainframe with the unaided hand.
   5. The FSLSD shall come with one (1) blank space cover and one (1) extender board.
   6. A package part number shall be assigned to the FSLSD as a whole system. This system part number shall be marked on the mainframe identification plate and all plug-in(s).
c. Signal input and output connectors. Unless otherwise specified, all signal input and output connectors shall be Type BNC female.
d. Internal cooling. The equipment shall be capable of operating continuously for twenty four (24) hours at 55ºC if forced air is used, it shall be as specified in Mil-Prf-28800.
   1. Forced air cooling motor. DC brushless motors shall be utilized for the forced air cooling motor in the equipment.
   2. Air filter. Equipment utilizing a cooling scheme which exhausts air from the equipment through the cooling fan shall not require an externally accessible air filter.
   3. Thermal switch. A thermal switch shall be provided which will interrupt circuit power to the FSLSD when the internal temperature rises to the degree of possible damage to the electronic

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:46Z
Check the source to verify that this is the current version before use.

components. A minimum of 10ºC hysteresis drop from this tripping temperature must occur before circuit power is again applied.

3.4 Electrical power sources. The equipment shall operate from nominal commercial, military, and shipboard power sources of 100, 110, 120, 200, 220, and 240 volts AC (±10%) at line frequencies of 50 Hz to 400 Hz.

a. Electrical power connectors. The equipment shall operate with a ground at the primary source on either side of the single phase input.
b. Power consumption. Maximum power consumption of all components combined shall not exceed 150 watts.
c. Fuses. Fuse(s) shall be provided, on the exterior rear panel for replacement without entering the enclosure. The fuse(s) shall automatically disconnect the equipment from the power source in the event of excessive current requirements.
d. Surge and transient voltage protection. The FSLSD shall contain surge and transient voltage protection internal of the enclosure. The transient voltage protection circuit shall be so designed as to prevent electronic device damage within the system per type III solid state tolerance bands of Mil-PRF-28800, the surge voltage protection circuit shall conform to IEEE-587-1980, category A. The surge protection circuit shall drain excess power due to surges directly to the ground conductor for personnel protection. Normal operation of the FSLSD may be inhibited and false operational signals may be generated under input voltage transients greater than ±20 percent and frequency transient conditions greater than ±5 percent from within the nominal type III steady state tolerance bands of Mil-PRF-28800, damage (other than fuse failure) to the FSLSD shall not occur during voltage transient conditions greater than ±20 percent and frequency transient conditions greater than ±5 percent within the maximum limits (30 percent voltage transients and 10 percent frequency transients) specified in Mil-PRF-28800. Normal conditions of the FSLSD shall be automatically resumed when the transient has passed and any blown fuses are replaced. Blown fuses shall be externally accessible. Testing shall be in accordance with Mil-PRF-28800.

3.5 Dimensions and weight. The size and weight of individual components shall be consistent with current commercial capabilities, refer to paragraphs 3.5a and 3.5b of this CID.

a. Equipment dimensions. The nominal dimensions per component for the FSLSD should be approximately 7 inches height x 17 inches wide x 18 inches deep.
b. Equipment weight. The weight including all accessories (excluding manual) per component, shall not exceed 50 lbs.

3.6 Enclosure requirements. Unless otherwise specified herein, the equipment shall comply with the style F enclosure requirements of Mil-PRF-28800.

a. Rackmount. Rackmount capability shall be available as an option for the equipment specified herein.
b. Tilt bail handle. A tilt bail handle shall be provided in lieu of the hinged metal handles in accordance with Mil-PRF-28800. Exception to this paragraph may be acceptable as this is not a prime consideration of the equipment.
c. Reusable pouch or container. An attached accessory pouch may be used for storage of all supplied accessories in lieu of front cover storage.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:46Z
Check the source to verify that this is the current version before use.

3.7 Marking and identification.

a. Marking. The visible surface adjacent to panel facilities such as variable controls, indicators, jacks, connectors and fuse holder(s), shall be marked with a suitable word, phrase, or abbreviation thereof, indicating the purpose or use of the part.

1. Panel marking. The front panel marking shall comply with the type III parts, materials and processes panel marking requirements of Mil-PRF-28800; however, marking identification processes other than the type III requirements specified in Mil-PRF-28800 may be used, provided the marking and identification processes are capable of passing the front panel marking test when tested in accordance with this CID.

b. Items to be marked (if applicable).

1. Volume and weight (including accessories) shall be marked on three external surfaces of the enclosure.
2. The type designation of the AN nomenclature of the FSLSD shall be stenciled on the exterior or main frame on at least three adjacent surfaces, on the transient case on two opposite sides. Marking shall be in block letters approximately 2 inches in height.

3.8 Environmental requirements.

a. Temperature requirements. Unless otherwise specified herein, the equipment shall meet its specified performance characteristics and other requirements when subjected to the class 5 temperature requirements specified by Mil-PRF-28800 and as listed below.
   1. Non-operating temperature. The equipment shall meet its performance and accuracy requirements in an non-operating environment of -40ºC to +71ºC.
   2. Operating temperature. The equipment shall meet its performance and accuracy requirements in an operating environment of 0ºC to 50ºC.
b. Humidity requirements. The equipment shall meet its required performance and accuracy requirements under humidity requirements for class 5 equipment as specified by Mil-PRF-28800.
c. Altitude requirements. The equipment shall meet its required performance and accuracy requirements under the altitude requirements of class 5 equipment as specified by Mil-PRF-28800.
d. Vibration requirements. The equipment shall meet the class 5 vibration requirements as specified by Mil-PRF-28800.
e. Mechanical shock requirements.
   1. Shock, functional. The equipment shall meet the class 5 shock, pulse requirement as specified by Mil-PRF-28800.
   2. Transit drop. The equipment shall meet transit drop requirement as specified by Mil-PRF-28800.
   3. Bench handling. The equipment shall meet the requirements as specified by Mil-PRF-28800.
   4. Shock, high impact. The equipment shall meet the requirements as specified by Mil-PRF-28800.
f. Electromagnetic interference (EMI). The equipment shall comply with Mil-PRF-28800.
g. Magnetic environment. The equipment shall comply with the magnetic environment requirements of Mil-PRF-28800.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:46Z
Check the source to verify that this is the current version before use.

3.9 Reliability. Reliability verification testing shall be in accordance with the type III, class 5 environmental conditions of Mil-PRF-28800.

a. Mean time between failures (MTBF). The equipment mean time between failures (MTBF) shall be 2000 hours. The lower test MTBF shall be 2000 and the upper test shall be MTFB 4000.
b. Pre-conditioning requirement. Each deliverable equipment shall be capable of being subjected to the environmental screening effects of burn in and thermal cycling, with thermal cycling being accomplished in the sample testing phase.
    1. Burn-in. Burn-in shall expose the equipment to extended periods of elevated temperatures, (40ºC for a minimum of 100 hours). Each equipment which fails during burn-in shall be repaired and fully retested, until failure free. Failures which occur during the burn-in test shall be noted and reported but shall not count toward the establishment of MTBF. Prior to and following burn-in, a satisfactory operation test (SOT) shall be performed. A satisfactory operation check (SOC) shall be conducted at selected times during the burn-in test.
    2. Thermal cycling. Thermal cycling shall expose the equipment to hot and cold cycles for class 5 equipment per Mil-PRF-28800. Each equipment which fails during thermal cycling shall be repaired and full cycling test shall be noted and reported but shall not count toward the cycling, a satisfactory operation check (SOC) shall be conducted during the last two upper and lower temperature limits.

3.10 Calibration and maintenance adjustments. The design of the system shall provide for readily accessible calibration adjustments and maintenance adjustments. These adjustments shall be provided by variable value components which are adjustable by the use of simple means. The calibration by substitution of selected components or parts is unacceptable unless specifically approved. The calibration adjustments, wherever possible, shall be accessible without removal of the instrument case or modules.

a. Maintainability. The equipment shall meet the type III maintainability requirements specified by Mil-PRF-28800.

3.11 Interchangeability. The equipment shall meet the type III interchangeability requirements specified by Mil-PRF-28800.

3.12 Digital interface. The equipment shall meet the digital interface requirements per Mil-PRF-28800.

3.13 Performance characteristics. Unless otherwise specified, all venier controls shall be in the calibrated position and all performance requirements shall apply after a 30 minute warm up period in a laboratory ambient operating temperature.

a. General requirements. This CID describes two types of FSLSD systems.
    1. Configuration A 50728. Configuration A system shall consist of a frequency selective levelmeter, and shall meet all performance characteristics.
    2. Configuration B 50728. Configuration B system shall consist of a frequency selective levelmeter and spectrum display, and shall meet all performance characteristics.
b. Electrical and functional requirements. This section shall reflect the minimum characteristics and accuracies for the frequency selective levelmeter.
    1. Frequency.
        a. Range. Equipment shall be capable of responding to signals within a frequency range from 1 KHz to 25MHz with an input impedance as follows:

75 ohms	1 kHz to 25 MHz
124 ohms	60 kHz to 11.5 MHz
135 ohms	10 kHz to 3.2 MHz
600 ohms	1 kHz to 650 MHz

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:46Z
Check the source to verify that this is the current version before use.

b. Display. Equipment shall have the capability of allowing frequencies to be displayed linearly on the horizontal axis of a cathode ray tube display.
c. Tuning. Equipment shall be capable of digitally being set to a selected frequency. It shall have the option of being swept about this center frequency manually.
d. Manual tuning. Equipment shall have the capability of being tuned manually by both an individual frequency decade control and a single knob tuning control.
e. Decade frequency selector. The decade frequency selector shall consist of six individual decade selectors, each individually selectable from 0 to 9, and one selectable from 0 to 2 in the following range:

10	Hz	per step	0 to 9
100	Hz	per step	0 to 9
1	KHz	per step	0 to 9
10	KHz	per step	0 to 9
100	KHz	per step	0 to 9
1	MHz	per step	0 to 9
10	MHz	per step	0 to 2

f. Resolution. The equipment shall be capable of resolving frequencies with an accuracy of 10 Hz.
g. Accuracy. The equipment shall have an accuracy of ± 1 ppm ±20 Hz from 20ºC to 30ºC, and ±2 ppm from 0ºC to 45ºC.
h. Stability. The equipment shall be stable to within 5 ppm per year.

2. Level.
   a. Range. The equipment shall have a level measuring range from -129 dBm to +12 dBm over the specified frequency range referenced to 0 dBm on meter.
   b. Indicator. The equipment shall have an indicator showing what level measurement range has been selected and it shall be by means of a 3 digit LED display.
   c. Resolution. The equipment shall be capable of resolving levels in 1 dBm and 10 dBm steps and shall include a continuous venier control with a calibrated mode.
   d. Modes. The equipment shall have a noise mode and a tone mode with the following ranges:

tone level range	-89 dBm to 10 dBm for meter zero
noise level range	-109 dBm to -10 dBm for meter zero

   e. Accuracy. Accuracy of the equipment after internal calibration at each measurement frequency, shall be as follows:

75 ohms

Tone mode	25ºC ±5ºC	
75 Hz Bandwidth		
10 KHz to 18.6 MHz		
	-69 dBm to +20 dBm	±0.15 dB
	-89 dBm to -69 dBm	±0.20 dB
18.6 MHz to 25 MHz		
	-69 dBm to +10 dBm	±0.25 dB
	-89 dBm to -69 dBm	±0.30 dB
1KHz to 10 KHz		
	-69 dBm to +10 dBm	±0.30 dB
	-89 dBm to -69 dBm	±0.70 dB
Tone mode	0ºC to 45ºC	±0.10 dBm additional

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:46Z
Check the source to verify that this is the current version before use.

Noise mode

75 Hz Bandwidth

10 KHz to 100 KHz		
	-99 dBm to -10 dBm	±0.40 dB
	-109 dBm to -99 dBm	±0.90 dB
100 KHz to 18.6 MHz		
	-99 dBm to -10 dBm	±0.25 dB
	-109 dBm to -99 dBm	±0.35 dB
18.6 MHz to 25MKHz		
	-99 dBm to -10 dBm	±0.30 dB
	-109 dBm to -99 dBm	±0.50 dB

Noise mode	0ºC to 45ºC	±0.10 dBm additional

124, 135, 600 ohms

25ºC to ±5ºC	±0.10 dB in addition to 75 ohms
0ºC to ±45ºC	±0.15 dB in addition to 75 ohms

3. Input.

a. Impedance. The equipment shall have four values of input impedances. They shall be 75 ohms in the Unbalanced state and 124, 135, and 600 ohms in the Balanced STD Unit state. All four values shall be push button selectable and shall be mounted on the front panel.

b. Return loss. Return loss for the equipment shall equal or better the following:

Tone mode 75 ohms

-79 dBm to +10 dBm	30 dB
-89 dBm to -79 dBm	2 dB

Noise mode

-89 dBm to +10 dBm	30 dB
-99 dBm to -89 dBm	20 dB

Tone mode 124, 135, and 600 ohms

-79 dBm to +10 dBm	30 dB except for 1st octave of frequency range 27 dB including 1st octave of frequency range
-89 dBm to -79 dBm	20 dB

Noise mode 124, 135, and 600 ohms

-89 dBm to +10 dBm	30 dB except for 1st octave of frequency range 27 dB including 1st octave of frequency range
-99 dBm to -89 dBm	20 dB

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:46Z
Check the source to verify that this is the current version before use.

c. Overload indicator. The equipment shall have an overload indicator light. It shall light up when high level inputs as follows are present:

For 1800 channels

Tone Mode	25 dB overdrive typical
Noise Mode	45 dB overdrive typical

d. Signal indicator. The equipment shall have a signal indicator light that is activated when a signal equivalent to -8 dB is present.

4. Bandwidth. The equipment shall provide three bandwidths. Filters shall have the following selectivity:

Filter		
75 Hz	75 Hz ±10%	350 Hz
1.75 KHz (equivalent noise bandwidth)	2.3 KHz ±10%	4.6 KHz
3.1 KHz	3.1 KHz ±10%	6.2 KHz

5. Internal distortion.
   a. Harmonic. The harmonic distortion for the equipment shall be 75 dB below the fundamental for a 60 dB sensitivity increased from 10 KHz to 25 MHz .
   b. Noise power ratio (NPR). The NPR for the equipment shall be a minimum of 54 dB for a 40 dB sensitivity increase for an equivalent noise power, equivalent to 1800 channels. For an equivalent 600 channels, NPR shall be a minimum of 56 dB for a 40 dB sensitivity increase.
6. Intermediate frequencies. The equipment shall proved three intermediate frequencies with an IF and Image rejection of 80 dB. These three frequencies shall be:

IF 1	50.7 MHz
IF 2	10.7 MHz
IF 3	80 MHz

7. Audio output. The equipment shall provide audio monitor jacks for external test equipment.
   a. Speaker. The equipment shall provide an internal speaker connected to the audio output.
   b. Control. Both the equipment's speaker and audio output monitor audio level shall be controlled by a volume adjust located on the front panel.
   c. Functions. The equipment shall provide USB, LSB and AM modulation functions. These functions shall be either pushbutton selectable or knob selectable. Control or controls shall be located on the front panel.
8. Residual phase jitter. With a 20 dB overdrive to the meter, residual phase jitter for the equipment shall be 0.5° nominal for signals 20 Hz to 300 Hz from the carrier.
9. Tracking signal output. The equipment shall provide a tracking signal output from rear panel at 0 dBm ±0.25 dB into 75 ohms impedance from 1 KHz to 25 MHz .
10. Recorder output. The equipment shall provide 0.8 volts DC typical into 1 K ohm impedance for 0 dB on meter for recorder operation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:46Z
Check the source to verify that this is the current version before use.

11. Time base output. The equipment shall provide a time base output from the rear panel. Frequency shall be 10 MHz with a level of -10 dBm ±4 dB into 50 ohm impedance.
12. Meter. The equipment shall have a meter located on the front panel to measure level.

    a. Scale. The meter shall have both a normal and an expanded scale. Normal scale shall be from +2 dBm to -20 dBm and the expanded scale shall be from -1.0 dBm to +1.0 dBm. Minimum resolution on the expanded band shall be 0.05 dB.
    b. Linearity. The meter shall have a linearity error of less than ±.02 dB in the expanded scale and less than ±0.1 dB from +2 dBm to -10 dBm and less than ±0.7 dB from -30 dBm to -20 dBm in the normal scale.

13. Calibration. Equipment shall have an internal calibration circuit. It shall provide its own calibration signals.
    a. Level source. A precision level source shall be provided at each discrete measurement frequency available from the instrument.
    b. Control. The equipment shall provide a front panel pushbutton and level control that shall make all the necessary connections for calibration. No external cabling shall be allowed.
14. Probe power. The equipment shall provide a front panel output of 15 vDC , 50 mA maximum for a high impedance probe.

c. Electrical and functional requirements. This section shall reflect the minimum characteristics and accuracies which shall be acceptable for the spectrum display.

1. Compatibility. The equipment shall be compatible with the frequency selective levelmeter described in para 2.2.
2. Frequency.
    a. Range. The equipment shall be capable of displaying frequencies with 1 KHz to 25 MHz.
    b. Sweep width. The equipment shall provide three sweep width capable of the following:
    *Continuous or recurring sweep.
    *Single Sweep. Single sweep shall be activated by a pushbutton on the front panel.
    * Manual Sweep. Manual sweep shall be provided by means of a tuning control.
    c. Sweep width calibration. Sweep width calibration shall be provided by the equipment using a nominal 4 KHz per channel, in channels and in KHz/division, for six horizontal sweep scales as follows:

1	channel
12	channel
60	channel
600	channel
1800	channel
3600	channel

The sixth sweep mode shall sweep the entire frequency range of the instrument. The above scales represent deflection from the furthest left to right graticules of the cathode ray tube.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:46Z
Check the source to verify that this is the current version before use.

d. Resolution. Resolution for the equipment shall equal or better the following:

Signal level separation	0 dB	20 dB	50 dB
25 MHz	250 KHz	350 KHz	500 KHz
10 MHz	100 KHz	150 KHz	200 KHz
3 MHz	30 KHz	40 KHz	50 KHz
300 KHz	5 KHz	10 KHz	15 KHz
60 KHz	1 KHz	2 KHz	4 KHz
4 KHz	100 Hz	200 Hz	500 Hz

3. Level.

a. Range. The equipment shall be capable of displaying levels in the following ranges:

Total -109 dBm to +10 dBm (for zero level on display)
Display 60 dB logarithmic (linear dB scale)
+40 dB to -20 dB (referred to 0 dB reading on levelmeter)

b. Accuracy. The equipment shall have the same accuracy as reflected for the level meter in para 3.13.2.

c. Frequency response. The frequency response for the equipment shall be within ±0.1 dB for full frequency span of 1 KHz to 25 MHz.

d. Display linearity. The equipment shall have a vertical linearity of ±0.5 dB in the dB/cm mode and ±2 dB in the 10 dB/cm mode.

4. IF Bandwidths. The equipment shall have the following sweep widths.

at 3 dB		
25 MHz	10 MHz and 3 MHz	5 KHz
300 KHz		1.5 KHz
60 KHz		400 Hz
4 KHz		45.0 Hz

5. Sweep Rate. The equipment shall be capable of providing the following sweep rates:

Sweep widths	Sweep rate
25 MHz	0.9 Hz (2500 MS period)
10 MHz	1.0 Hz (1000 MS period)
3 MHz	
300 KHz	2.2 Hz (450 MS period)
60 KHz	
4 KHz	0.5 Hz (2000 MS period)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:46Z
Check the source to verify that this is the current version before use.

6. Display linearity. The equipment shall have a display linearity equal to or better than the following:

Sweep widths	% of full scale 25ºC ± 5ºC	0ºC to 45ºC
MHz	±3%	±4%
MHz	±5%	±10%
MHz	±5%	±10%
KHz	±2%	±2%
KHz	±2%	±2%
KHz	±5%	±8%

7. Cathode Ray Tube (CRT). The equipment shall have either a (6 cm x 10 cm) or a (8 cm x 10 cm) CRT. It shall display level vs frequency.
    a. CRT controls. The equipment shall have an intensity, focus, astigmatism, and scale illumination control. The scale illumination shall be provided by means of an adjustable internal light.
    b. Bezel. A bezel shall be included for an oscilloscope camera attachment.
    c. Range. CRT shall have either 60 dB (10dB/cm) and 6 dB (1 dB/cm) or 80 dB (10 dB/cm and 8 dB (1dB/cm)) depending on the size of the CRT.
8. High Level Alarm Output. The equipment shall provide a high level alarm output. It shall be by means of a set of dry contacts on the rear panel rated at 1 amp at 125 vac.
9. High Level Alarm Trigger Level. The high level alarm shall trigger at the presence of any of the following:

Sweep widths	4 KHz to 10 MHz
10 dB/div mode	+1.0 dB graticule ±2.5 dB
1 dB/div mode	+0.1 dB graticule ±1 dB

3.14 Calibration interval. After calibration, the equipment shall meet each performance requirement within the tolerances specified for a period of at least 9 months, based on an operating time of 1500 hours.

4. REGULATORY REQUIREMENTS

4.1 Recycled, recovered, or environmentally preferable materials. Recycled, recovered, or environmentally preferable materials should be used to the maximum extent possible provided that the material meets or exceeds the operational and maintenance requirements, and promotes economically advantageous life cycle costs. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

4.2 Green Procurement Program. Green Procurement Program (GPP) is a mandatory federal acquisition program that focuses on the purchase and use of environmentally preferable products and services. GPP requirements apply to all acquisitions using appropriated funds, including services and new requirements. FAR 23.404(b) applies and states the GPP requires 100% of EPA designated product purchase that are included in the Comprehensive Procurement Guidelines list that contains recovered materials, unless the item cannot be acquired: a) competitively within a reasonable timeframe; b) meet appropriate performance standards, or c) subcontractors comply with this requirement.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:46Z
Check the source to verify that this is the current version before use.

5. PRODUCT CONFORMANCE PROVISIONS

5.1 Product conformance. The products provided shall conform to the producer's own drawings, specifications, standards, and quality assurance practices and shall be the same product offered for sale in the commercial market. The Government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

5.2 Certification. The contractor shall certify that the product offered meets the salient characteristics of this description and that the product conforms to the producer's own drawings, specifications, standards and quality assurance practices and is the same product offered for sale in the commercial marketplace. Small businesses that cannot offer products with established commercial market acceptability may compete by submission of bid samples. (The Government reserves the rights to require proof of such conformance before first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

6. PACKAGING

6.1 Preservation, packing, and marking. Preservation, packing, and marking shall be as specified in the contract or order.

7. NOTES.

7.1 Sources of documents.

7.1.1 Military Specifications, Standards, and Handbooks. Military Specifications, Standards, and Handbooks referenced herein may be obtained at https://assist.daps.dla.mil or from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094.

7.1.2 FAR and DFARS. FAR and DFARS may be obtained from the Superintendent of Documents, P.O. Box 371954, Pittsburgh, PA 15250-7954. Electronic copies of the FAR may be obtained from https://www.acquisition.gov/far/ . Electronic copies of the DFARS may be obtained from http://www.acq.osd.mil/dpap/dars/dfars/index.htm .

7.1.3 Institute of Electrical and Electronics Engineers (IEEE) standards products may be obtained at http://www.ieee.org or available from IEEE Operations Center. Phone: (800)678-IEEE. Mail: IEEE Operations Center, Sales Office, 445 Hoes Lane, PO Box 1331, Piscataway, NJ, 08855-1331, USA.

7.2 Known acceptable products. The following product(s) are known to have previously met the requirements of this CID and need not resubmit bid samples or certification. All other manufacturers must meet the requirements of this CID and submit to bid testing and certification as required.

Manufacturer	Model
Hewlett Packard	3586B-003-004-H18
Anritsu	ML 422B

7.3 Key Words.

Class 5
Digital Interface
Type III

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:46Z
Check the source to verify that this is the current version before use.

MILITARY INTERESTS:

Custodian:
Air Force – 84

Review Activity
Air Force - 99

Preparing Activity:
Air Force - 84

Agent:
Air Force - 99

(Project No. 6625-2010-007)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.daps.dla.mil .

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:46Z
Check the source to verify that this is the current version before use.