DETAIL SPECIFICATION SHEET

ADAPTERS, STRAIGHT, PIPE TO TUBE - SAFETY SLEEVE COMPRESSION TYPE, MALE PIPE END

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet.

NOTICE OF INACTIVATION FOR NEW DESIGN AS OF 29 DEC 1967.

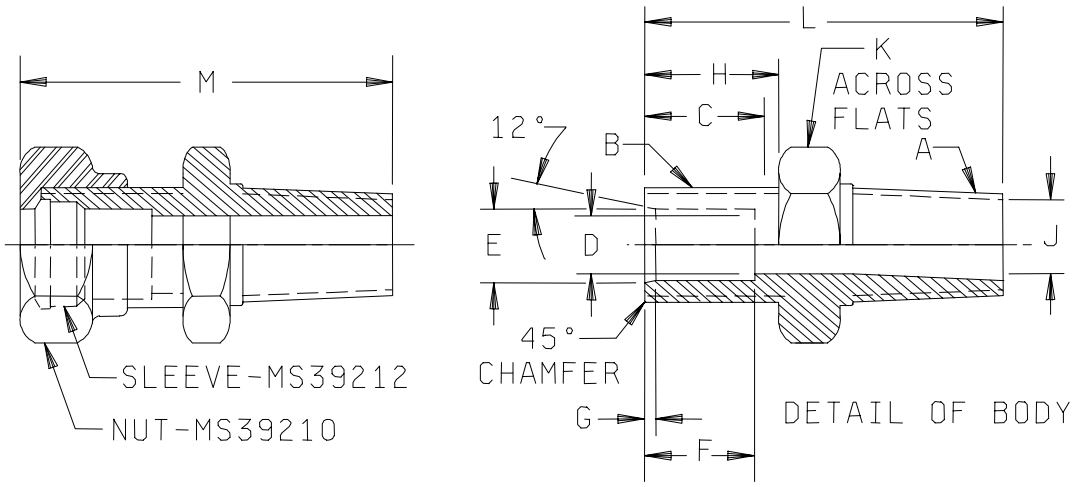

FIGURE 1. Adapters, straight, pipe to tube – safety sleeve compression type, male pipe end.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:48Z
Check the source to verify that this is the current version before use.

TABLE 1. Adapters, straight, pipe to tube-safety sleeve compression type, male pipe end.

Dash No.	Tube O.D.	A Pipe Thread NPTF	B	C Thread Length	D	E	F	G	H	J	K	L	M
1	1/8	1/8	5/16 24UNF-2A	7/32	3/32	.135 .139	13/64	1/8	9/32	3/16	7/16	7/8	1-3/16
2	3/16	1/8	3/8 24UNF-2A	7/32	1/8	.196 .200	1/4	5/32	9/32	3/16	7/16	7/8	1-7/32
3	1/4	1/8	1/2 20UNF-2A	21/64	13/64	.261 .265	19/64	13/64	13/32	3/16	1/2	1	1-13/32
4	5/16	1/8	9/16 18UNF-2A	21/64	13/64	.324 .328	19/64	13/64	13/32	3/16	5/8	1	1-3/8
5	1/4	1/4	1/2 20UNF-2A	21/64	13/64	.261 .265	19/64	13/64	13/32	13/64	5/8	1-5/32	1-9/16
6	5/16	1/4	9/16 18UNF-2A	21/64	13/64	.324 .328	19/64	13/64	13/32	13/64	5/8	1-1/4	1-5/8
7	3/8	1/4	5/8 18UNF-2A	23/64	9/32	.386 .390	19/64	13/64	7/16	9/32	11/16	1-1/4	1-11/16
8	1/2	1/4	3/4 16UNF-2A	11/32	27/64	.514 .518	5/16	13/64	7/16	9/32	3/4	1-1/4	1-25/32
9	1/2	3/8	3/4 16UNF-2A	11/32	27/64	.514 .518	5/16	13/64	7/16	27/64	3/4	1-1/4	1-25/32
10	5/8	3/8	15/16 16UN-2A	23/64	1/2	.641 .645	11/32	15/64	15/32	13/32	15/16	1-11/32	1-7/8
11	3/8	1/2	5/8 18UNF-2A	23/64	9/32	.386 .390	19/64	13/64	7/16	1/2	7/8	1-19/32	2-1/32
12	5/8	1/2	15/16 16UN-2A	23/64	1/2	.641 .645	11/32	15/64	15/32	1/2	15/16	1-5/8	2-5/32
13	3/4	1/2	1-1/16 16UN-2A	23/64	21/32	.766 .770	11/32	13/64	15/32	1/2	1-1/8	1-39/64	2-13/64
14	3/4	3/4	1-1/16 16UN-2A	23/64	21/32	.766 .770	11/32	13/64	15/32	21/32	1-1/8	1-5/8	2-7/32
15	7/8	3/4	1-3/16 16UN-2A	23/64	23/32	.891 .895	11/32	13/64	15/32	21/32	1-1/4	1-5/8	2-7/32
16	1	3/4	1-5/16 16.UN-2A	23/64	7/8	1.016 1.020	13/32	13/64	15/32	21/32	1-3/8	1-5/8	2-7/32
17	7/8	1	1-3/16 16UN-2A	23/64	23/32	.891 .895	11/32	13/64	15/32	23/32	1-3/8	1-13/16	2-13/32
18	1	1	1-5/16 16UN-2A	23/64	7/8	1.016 1.020	13/32	13/64	15/32	7/8	1-3/8	1-13/16	2-13/32
19	1-1/4	1	1-5/8 16UN-2A	7/16	1-3/32	1.270 1.274	13/32	13/64	35/64	29/32	1-5/8	1-7/8	2-9/16
20	1-1/4	1-1/4	1-5/8 16UN-2A	7/16	1-3/32	1.270 1.274	13/32	13/64	35/64	1-3/32	1-11/32	1-29/32	2-17/32
21	1-1/2	1-1/2	1-7/8 16UN-2A	15/32	1-11/32	1.520 1.524	31/64	13/64	35/64	1-11/32	2	2	2-11/16

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:48Z
Check the source to verify that this is the current version before use.

NOTES:
1. Dimensions are in inches.
2. Referenced documents shall be of the issue in effect in date of invitations for bid.
3. This illustration is for identification and is not intended to restrict designs or shapes not dimensioned.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Material: Carbon steel in accordance with SAE-AMS-STD-66, AISI-C-1112, C-1113, C-1117, C-1118 or C-1137.

Finish: Cadmium plated, specification QQ-P-416, type II, class 3. To the users of this document, it is recommended that the use of steel and cadmium plating be used only when other materials and finishes specified in the document cannot meet performance requirements.

Tolerances: Unless otherwise specified, decimals ±.005, fractions ±1/64, degrees ±2°.

Threads: The threads shall be in accordance with FED-STD-H28A.

Part or Identifying Number (PIN) example: (PIN covers the complete item with nuts and sleeves.)

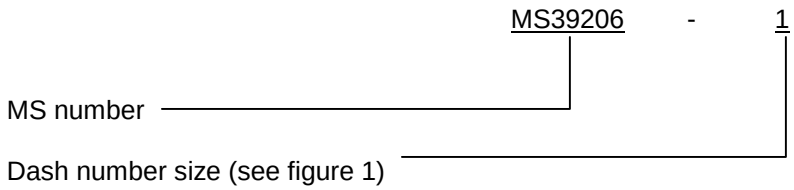

CONCLUDING MATERIAL

Custodians:
Army - AT
DLA - CC

Preparing activity:
DLA - CC

(Project 4730-2193)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:48Z
Check the source to verify that this is the current version before use.