FED. SUP CLASS
4720

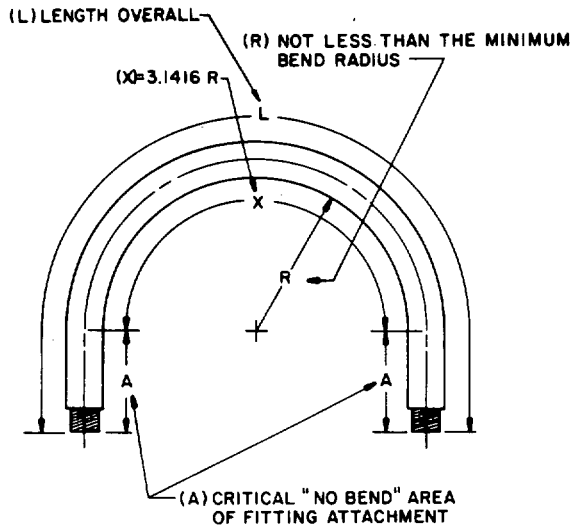

HOSE SIZE	MINIMUM BEND RADIUS MIL-H-52471		
	SINGLE WIRE BRAID 100 R1	DOUBLE WIRE BRAID 100 R2	FOUR SPIRAL WRAP 100 R10
1/4	4	4	5
3/8	5	5	6
1/2	7	7	8
3/4	9 1/2	9 1/2	11
1	12	12	14
1 1/4	16 1/2	16 1/2	18
1 1/2	20	20	22
2	25	25	28

NOTE: 1. ALL DIMENSIONS ARE IN INCHES
2. STATIONARY HOSE INSTALLATION FORMULA SHALL BE L = 2A + X
3. A = COUPLING LENGTH PLUS 2 X HOSE I.D.
4. THIS IS A DESIGN STANDARD AND SHALL NOT BE USED AS A PART NUMBER

(C)

APPROVED (12) NOV 1965 REVISED (A) 28 DECEMBER 1970 (B) 24 FEBRUARY 1983 (C) 14 SEPTEMBER 1984

REVIEW ACTIVITIES: CS
USER ACTIVITIES: AL,82

THIS MILITARY STANDARD IS MANDATORY FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE. SELECTION FOR ALL NEW ENGINEERING AND DESIGN APPLICATIONS AND FOR REPETITIVE, USE SHALL BE MADE FROM THIS DOCUMENT.

P. A. ARMY-ME Other Cust AIR FORCE 99	INTERNATIONAL INTEREST	TITLE HOSE, RUBBER: HYDRAULIC, PRESSURE TYPE. MINIMUM BEND RADIUS	MILITARY STANDARD MS39267
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:		SHEET 1 OF 1

DD FORM 1 MAY 73 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE PROJECT NO. 4720-0641

U.S. GOVERNMENT PRINTING OFFICE: 1984 — 505-038/A5246

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:50Z
Check the source to verify that this is the current version before use.