Review activities: Army - MO, MU; Navy - SH; Air Force - 11, 68
User activities: Army - None; Navy WP, YD; Air Force - None

This Military Standard has been approved by the Department of Defense and is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

FED. SUP CLASS
8120

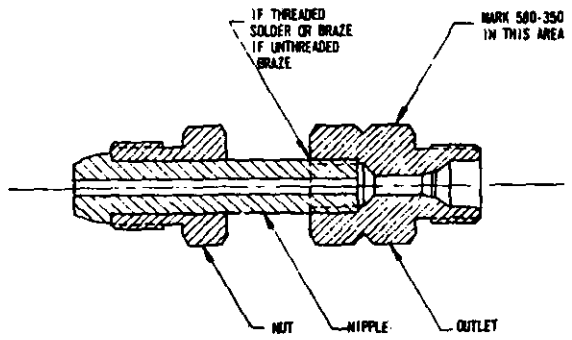

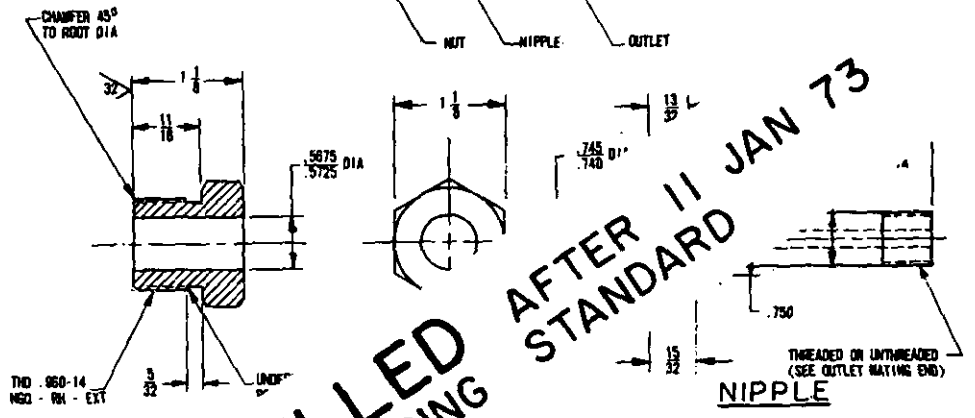

NIPPLE

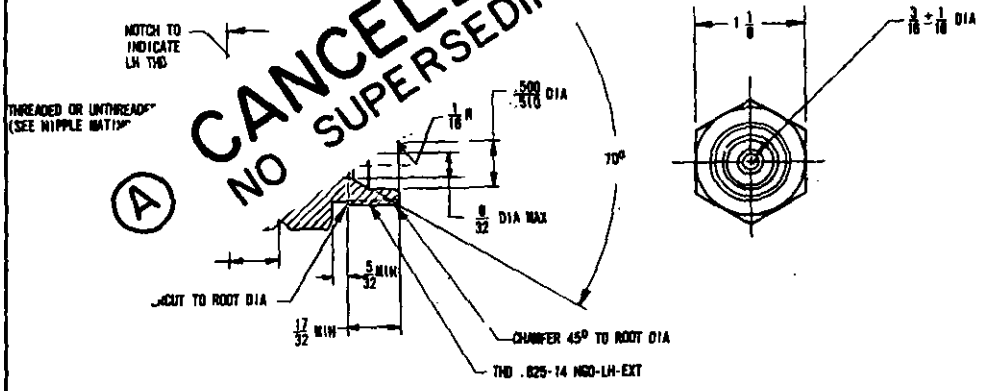

OUTLET

CANCELLED
NO SUPERSEDING
AFTER 11 JAN 73
STANDARD

NOTES:

1. FOR DESIGN FEATURE PURPOSES THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
2. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BIDS.
3. MATERIAL: BRASS, HALF HARD, QQ-B-626, COMP 22.
4. UNLESS OTHERWISE SPECIFIED, LINEAR TOLERANCES SHALL BE ±1/64 IN. FOR FRACTIONS, ±0.010 IN. FOR DECIMALS, ANGULAR TOLERANCES SHALL BE ±1/2°
5. ALL DIMENSIONS IN INCHES.
6. THREADS SHALL BE IN ACCORDANCE WITH H28, SCREW-THREAD STANDARDS FOR FEDERAL SERVICES.
7. NOTCH TO INDICATE LH THREAD SHALL BE 60° X 1-5/32 IN. DIA.
8. CHAMFER ON HEXAGON OF NUT AND OUTLET SHALL BE 30° X 1-1/8 DIA.

APPROVED 24 NOV 1965 REVISED (A) 11 JAN 73

P.A. ARMY - MO (ENGL) Other Cust NAVY - SH AIR FORCE - 11	TITLE ADAPTER, COMPRESSED GAS CYLINDER VALVE CONNECTIONS: BRASS, HELIUM, CLASS 580-350, 2,500 PSI SERVICE PRESSURE.	MILITARY STANDARD MS39272
PROCUREMENT SPECIFICATION MIL-A-18288	SUPERSEDES:	SHEET ' OF '

DD FORM 1 SEP 67 672-1 (Considered)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:50Z
Check the source to verify that this is the current version before use.