FED. SUP CLASS
8120

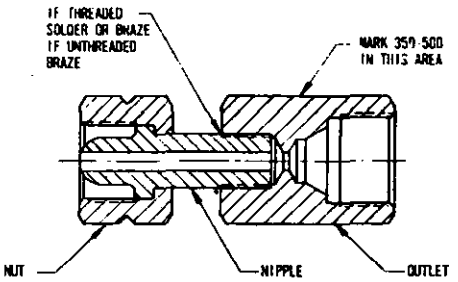

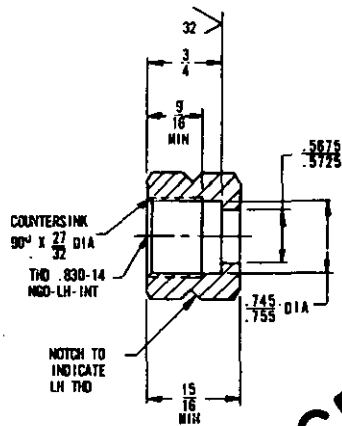

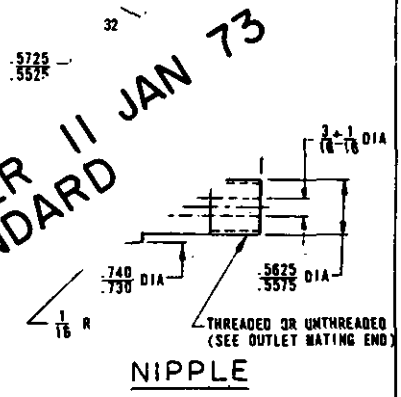

NIPPLE

A CANCELLED AFTER 11 JAN 73
NO SUPERSEDING STANDARD

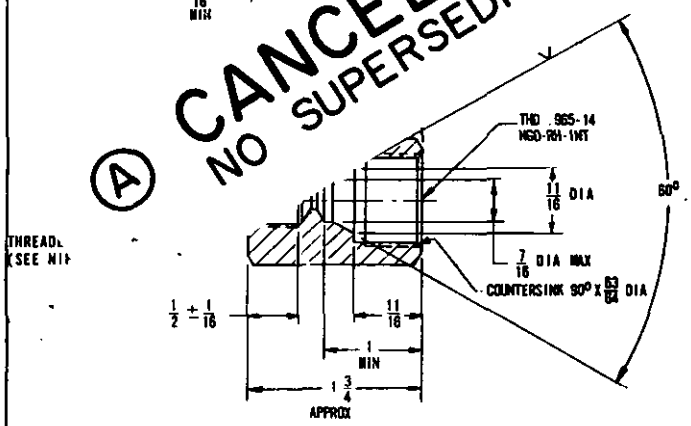



OUTLET

NOTES:

1. FOR DESIGN FEATURE PURPOSES THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
2. REFERENCE DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.
3. MATERIAL: BRASS, HALF HARD, QQ-B-626, COMP 22.
4. NOTCH TO INDICATE LH THREAD SHALL BE 60° X 1-5/32 IN. DIA.
5. UNLESS OTHERWISE SPECIFIED, LINEAR TOLERANCES SHALL BE ± 1/64 IN. FOR FRACTIONS, ±0.010 IN. FOR DECIMALS, ANGULAR TOLERANCE SHALL BE ±1°.
6. ALL DIMENSIONS IN INCHES.
7. THREADS SHALL BE IN ACCORDANCE WITH H28, SCREW-THREAD STANDARDS FOR FEDERAL SERVICES.
8. CHAMFER ON HEXAGON OF NUT AND OUTLET SHALL BE 30° X 1-1/8 DIA.

APPROVED 24 NOV 1965 REVISED (A) 11 JAN 73

P.A. ARMY - MO (ERDL) Other Cust NAVY - SH AIR FORCE - 11	TITLE ADAPTER, COMPRESSED GAS CYLINDER VALVE CONNECTIONS: BRASS, HELIUM, CLASS 350-580, 2,500 PSI SERVICE PRESSURE.	MILITARY STANDARD MS39273
PROCUREMENT SPECIFICATION MIL-A-18288	SUPERSEDES:	SHEET 1 OF 1

DD FORM SEP 67 672-1 (Coordinated)

Review activities: Army - MC, MU; Navy - SH; Air Force - 11, 99
User activities: Army - None; Navy WP, YD; Air Force - None

This Military Standard has been approved by the Department of Defense and is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document

Source: https://assist.dla.mil -- Downloaded: 202610-23T17:50Z
Check the source to verify that this is the current version before use.