FED. SUP CLASS
4730

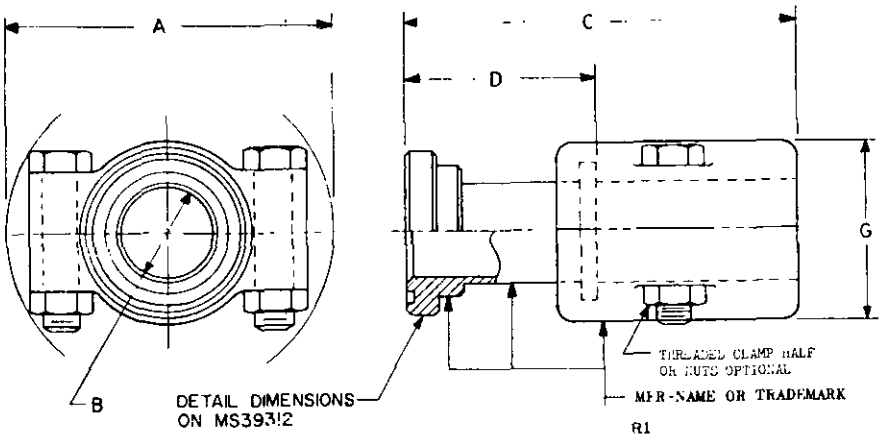

NOTE 5

TABLE I. DIMENSIONS FOR "A" COUPLINGS

HOSE SIZE NO.	HOSE I.D. REF.	A MAX	B MIN	C MAX	D MAX
-16	1.000	3.59	.78	4.38	
-20	1.250	4.00	1.01		
-24	1.500	4.50	1		
-32	2.000	5.1[illegible]			

PRESSURES OF "A" COUPLINGS

	PSI
	1,000
1-1/4	625
1-1/2	500
2	375

(B) Cancelled after 9 Mar 82
For Future Procurement use
MIL-F-52525/19

NOTES:

1. MATERIAL SHALL BE STEEL OR MALLEABLE IRON.
2. THE COUPLINGS SHALL BE ZINC PLATED IN ACCORDANCE WITH QQ-Z-325,TYPE II,CLASS 2,OR CADMIUM PLATED IN ACCORDANCE WITH QQ-P-416,CLASS 3,TYPE II, EXCEPT THE EMBRITTLEMENT CHECK NEED NOT BE RUN.
3. THREADS SHALL BE IN ACCORDANCE WITH HANDBOOK H28,EXCEPT THREADS THAT GRIP THE HOSE (IF USED) ARE OPTIONAL.
4. ALL DIMENSIONS ARE IN INCHES.
5. LOCATION OF MARKING IS OPTIONAL; ALL MARKING NEED NOT BE CONFINED TO ONE LOCATION. MARKING MAY BE APPLIED IN ANY ORDER.
6. PRESSURES ARE IN POUNDS PER SQUARE INCH.
7. THIS ITEM MUST BE LISTED ON QPL52525.

(A) ENTIRE STANDARD REVISED

P.A. ARMY-ME Other Cust	TITLE COUPLING,HOSE;FIELD ATTACHABLE (REUSEABLE), HYDRAULIC,PRESSURE TYPE, CLAMP-ON, 4-BOLT SPLIT-FLANGE, STRAIGHT, SINGLE WIRE BRAID HOSE.	MILITARY STANDARD MS 39282
PROCUREMENT SPECIFICATION MIL-C-52525	SUPERSEDES	SHEET 1 OF 2

DD FORM 1 SEP 67 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

REVIEW ACTIVITY:

USER ACTIVITY: MU, WC, 82

...S MILITARY STANDARD IS MANDATORY FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE ...PARTMENT OF DEFENSE. SELECTION FOR ALL NEW ENGINEERING AND DESIGN APPLICATIONS ...D FOR REPETITIVE USE SHALL BE MADE FROM THIS DOCUMENT.

APPROVED 26 AUGUST 1966 REVISED (A) 28 DECEMBER 1970 (B) 9 March 1982

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:50Z
Check the source to verify that this is the current version before use.