FED. SUP CLASS
4730

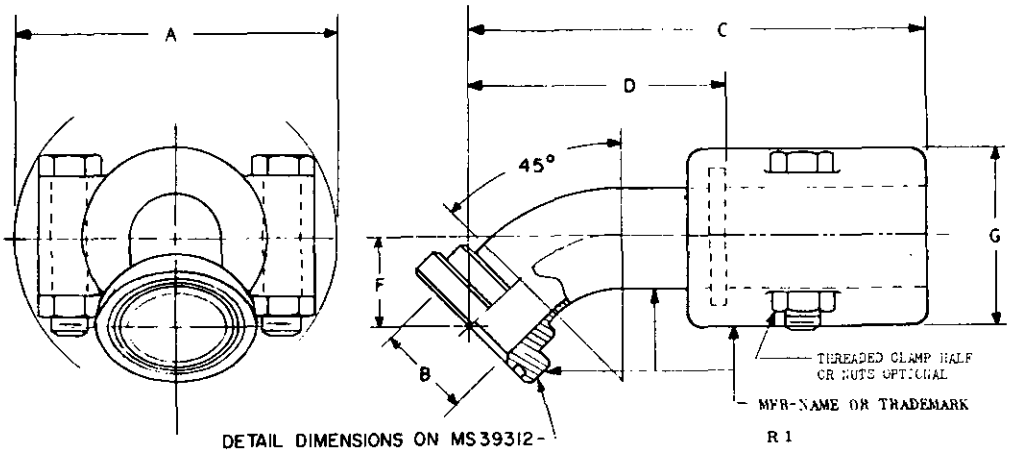

DETAIL DIMENSIONS ON MS39312-R1

NOTE 5

TABLE I.

DIMENSIONS FOR "A" COUPLINGS

DASH NO.	HOSE I.D. REF.	A MAX	B MAX	C MAX
-16	1	3.59	.78	
-20	1-1/4	4.00		
-24	1-1/2			2.94
-32	2			3.50

(B) Cancelled after 9 Mar 82 For Future Procurement use MIL-F-52525/20

TABLE 2

PRESSURES OF "A" COUPLINGS

REF.	PSI
1	1,000
1-1/4	625
1-1/2	500
2	375

NOTES:

1. MATERIAL SHALL BE STEEL OR MALLEABLE IRON.
2. THE COUPLINGS SHALL BE ZINC PLATED IN ACCORDANCE WITH QQ-Z-325, TYPE II, CLASS 2, OR CADMIUM PLATED IN ACCORDANCE WITH QQ-P-416, CLASS 3, TYPE II, EXCEPT THE EMBRITTLEMENT CHECK NEED NOT BE RUN.
3. TREADS SHALL BE IN ACCORDANCE WITH HANDBOOK H28, EXCEPT THREADS THAT GRIP THE HOSE (IF USED) ARE OPTIONAL.
4. ALL DIMENSIONS ARE IN INCHES.
5. LOCATION OF MARKING IS OPTIONAL. ALL MARKING NEED NOT BE CONFINED TO ONE LOCATION. MARKING MAY BE APPLIED IN ANY ORDER.

(A) ENTIRE STANDARD REVISED

REVIEW ACTIVITIES: MU, WC, SH, 82

USER ACTIVITIES:

THIS MILITARY STANDARD IS MANDATORY FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE. SELECTION FOR ALL NEW ENGINEERING AND DESIGN APPLICATIONS AND FOR REPETITIVE USE SHALL BE MADE FROM THIS DOCUMENT.

APPROVED 26 AUGUST 1966 REVISED (A) 9 DECEMBER 1970 (B) 9 March 1982

P.A. ARMY-ME Other Cust	TITLE: COUPLING, HOSE; FIELD ATTACHABLE (REUSEABLE) HYDRAULIC, PRESSURE TYPE, CLAMP-ON, 4-BOLT SPLIT-FLANGE, 45° BENT TUBE, FOR RI SINGLE WIRE BRAID HOSE	MILITARY STANDARD MS 39283
PROCUREMENT SPECIFICATION MIL-C- 52525	SUPERSEDES:	SHEET 1 OF 2

DD FORM 1 SEP 67 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 202610-23T17:50Z
Check the source to verify that this is the current version before use.