FED. SUP CLASS
4730

REVIEW ACTIVITIES:

USER ACTIVITIES: MU, WC, SH, 82

THIS MILITARY STANDARD IS MANDATORY FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE. SELECTION FOR ALL NEW ENGINEERING AND DESIGN APPLICATIONS AND FOR REPETITIVE USE SHALL BE MADE FROM THIS DOCUMENT.

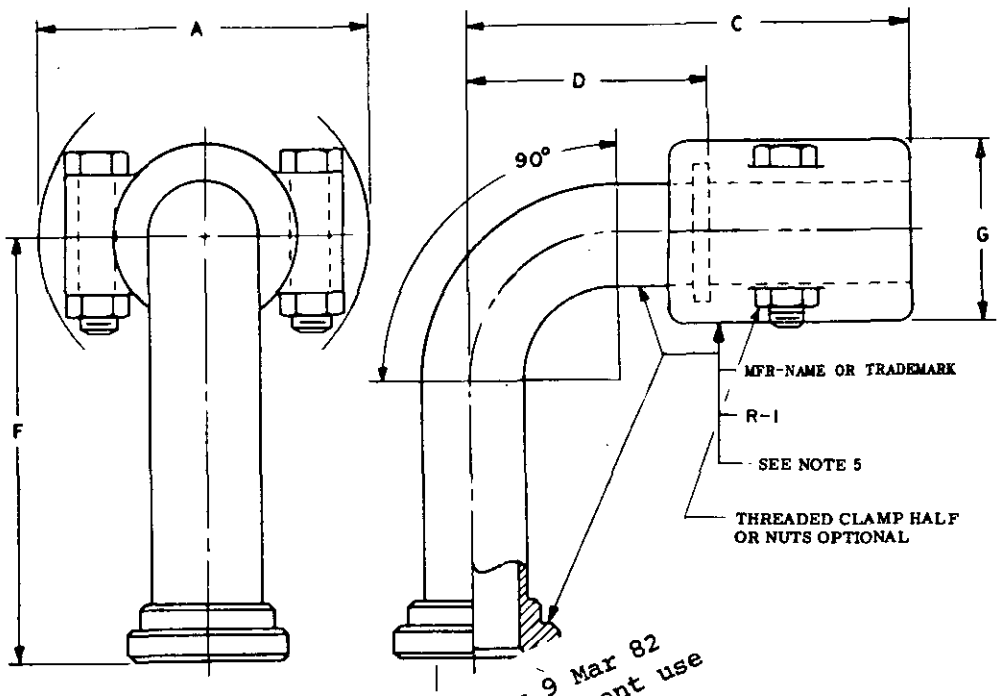

MS39312

(B) Cancelled after 9 Mar 82
For Future Procurement use
MIL-F-52525/22

DASH NO.	HOSE I.D. REF.	A					
-16	1	4				6.52	2.06
-20	1-1/4	4.c			6.00	3.06	7.38	2.72
-24	1-1/2	5.00	1.25	7.00	3.22	8.26	2.94
-32	2	5.38	1.73	8.50	6.31	10.00	3.50

TABLE II.
MAXIMUM WORKING PRESSURES OF "A" COUPLINGS

HOSE I.D. (REF)	PSI
1	1,000
1-1/4	625
1-1/2	500
2	375

NOTES:

1. MATERIAL SHALL BE STEEL OR MALLEABLE IRON.
2. THE COUPLINGS SHALL BE ZINC PLATED IN ACCORDANCE WITH QQ-Z-325, TYPE II, CLASS 2, OR CADMIUM PLATED IN ACCORDANCE WITH QQ-P-416, CLASS 3, TYPE II, EXCEPT THE EMBRITTLEMENT CHECK NEED NOT BE RUN.
3. THREADS SHALL BE IN ACCORDANCE WITH HANDBOOK H28, EXCEPT THREADS THAT GRIP THE HOSE (IF USED) ARE OPTIONAL.
4. ALL DIMENSIONS ARE IN INCHES.

(A) ENTIRE STANDARD REVISED

APPROVED 26 AUGUST 1966 REVISED (A) 28 DECEMBER 1970 (B) 9 March 1982

P.A. ARMY-ME Other Cust	TITLE COUPLING, HOSE; FIELD ATTACHABLE (REUSEABLE), HYDRAULIC, PRESSURE TYPE, CLAMP-ON, 4-BOLT SPLIT-FLANGE, 90° BENT TUBE, LONG DROP, SINGLE WIRE BRAID HOSE.	MILITARY STANDARD MS 39285
PROCUREMENT SPECIFICATION MIL-C-52525	SUPERSEDES:	SHEET 1 OF 2

DD FORM (SEP 87) 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:50Z
Check the source to verify that this is the current version before use.