INCH-POUND

MIL-DTL-6363/12A
30 September 1997
SUPERSEDING
MIL-L-6363/12
25 September 1992

DETAIL SPECIFICATION SHEET

LAMPS, INCANDESCENT, AIRCRAFT SERVICE, SINGLE CONTACT BAYONET CANDELABRA BASE, S-8 BULB

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification and MIL-DTL-6363.

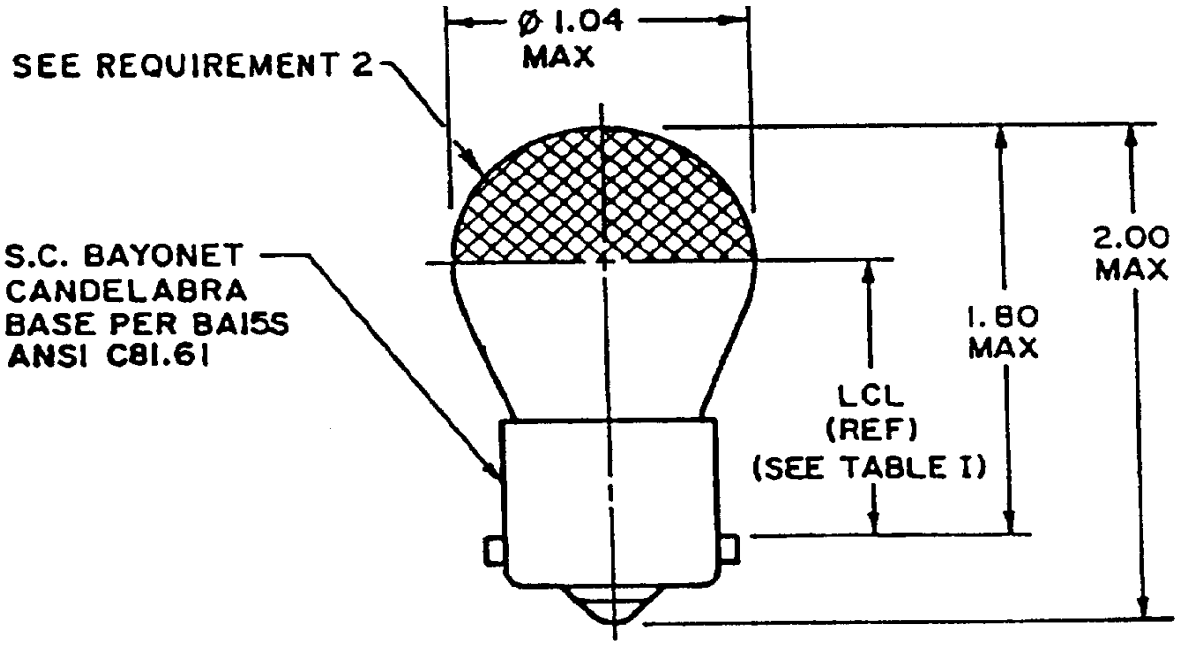


FIGURE 1. Configuration and dimensions.

See NOTES on the next page.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T06:56Z
Check the source to verify that this is the current version before use.

NOTES:

1. Dimensions are in inches
2. Intended use - aircraft interior and exterior lighting applications.
3. For design feature purposes, This specification takes precedence over procurement documents referenced herein.
4. Qualification by similarity - The following lamps are required to be fully qualified in accordance with table I of MIL-DTD-6363:
   M6363/12-1
   M6363/12-2
   M6363/12-4
   The following lamps may be qualified by similarity and extension of qualification from other fully qualified lamps: M6363/12-7 from M6363/12-2. M6363/12-3, -4R, -4SB, -5, -6, -8, and -9 from M6363/12-4.
   Refer to MIL-DTD-6363 for conditions and data requirements for extension of qualification.

REQUIREMENTS:

1. Configuration and dimensions: See figure 1 and table I.

2. Finish: Glass globe finish shall be as indicated in table I. Red lamps shall conform to MIL-C-25050 for instrument and panel lighting red. Reflective coated (top only) lamps shall be clear except for coated area. Distance from bottom edge of coated area to top of bayonet pins shall be approximately equal to the light center length (LCL).

3. Lamp operating characteristics: When operated at rated voltage, the lamp operating characteristics shall be as specified in table I.

4. Coating adhesion: Applicable to exterior coated lamps.

5. High temperature: Applicable for qualification tests only (85°C/185F°).

6. Thermal shock: Applicable for qualification tests only. Use temperatures for Type I lamps.

7. Random vibration: Applicable for qualification tests only. See figure 2 for random vibration curve.

8. Shock: Applicable for qualification tests only. See table I for applicable “g” level.

9. Humidity: Applicable for qualification tests only.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T06:56Z
Check the source to verify that this is the current version before use.

TABLE I. Part or identifying numbers (PIN) and operating characteristics.

Part or Identifying Number (PIN) 1/	Type MIL-DTL-6363	Bulb Finish See Rqt 2	LCL (Ref)	Shock Test Level (G's)	Electrical Ratings			Filament Style 2/	MSCD ±25%	Average Rated Lab Life at DC
					Volts (Nom)	Amperes (±10%)	Watts (Max)		Candelas	Hours
M6363/12-1	I	Clear	1.25	50	6.0	4.10	27.0	C-6	32	300
M6363/12-2		Clear	1.25		28.0	1.02	31.4	2 (C-2R or C-6)	32	500
M6363/12-3		Clear	1.25		12.8	1.44	20.2	C-6	21	500
M6363/12-4		Clear	1.12		28.0	0.66	20.6	C-2V	21	300
M6363/12-4R		Red	1.12		28.0	0.66	20.6	C-2V	21 3/	300
M6363/12-4SB		Reflect top	1.12		28.0	0.66	20.6	C-2V	21 3/	300
M6363/12-5		Clear	1.12		28.0	0.90	25.5	C-2V	32	300
M6363/12-6		Clear	1.12		28.0	0.51	15.7	C-2V	15	300
M6363/12-7		Clear	1.12		28.0	0.61	18.7	2 (C-2R or C-6)	15	1,000
M6363/12-8		Clear	1.19		28.0	0.64	19.7	CC-8	18	2,000
M6363/12-9		Clear	1.19		28.0	0.77	23.5	CC-8	21	2,000

1/ -1 and -2 are used in exterior navigation lighting application.

2/ Filament styles - 2 (C-2R or C-6) are dual filament construction. C-2V are supported filament construction. CC-8 are spiral supported filament construction.

3/ MSCD prior to coating.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T06:56Z
Check the source to verify that this is the current version before use.


10. Salt spray: Applicable for qualification tests only.

11. Marking: To be determined for marking of production lamps. Pending investigation of marking with military part number (or portion thereof) versus marking with lamp trade number (as is or modified). This requirement will not affect lamp qualification requirements.

12. Interchangeability: These lamps may be similar to, but are not interchangeable with, other commercial or military lamps due to unique aircraft applications and qualification.

There are no technical changes in this revision.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T06:56Z
Check the source to verify that this is the current version before use.

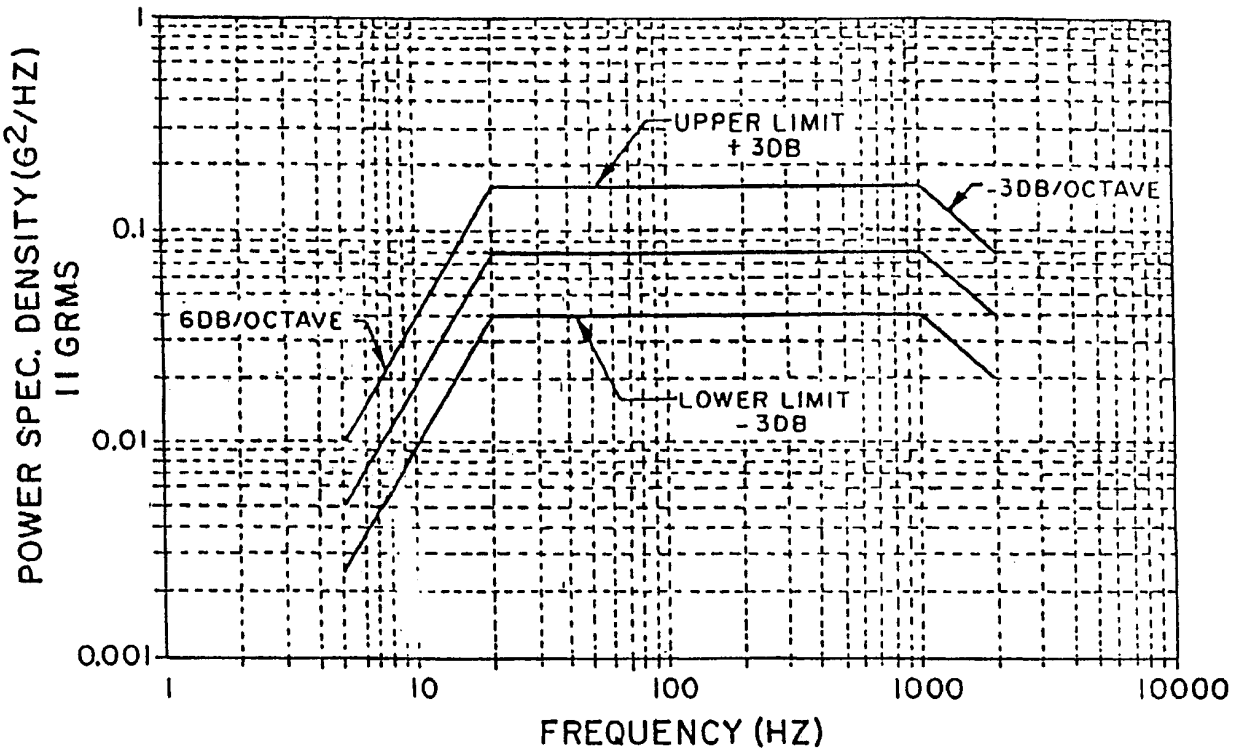

Freq Hz	Vibration Level PSD (G^2/Hz)	Upper Limit (+3 DB) PSD (G^2/Hz)	Lower Limit (-3 DB) PSD (G^2/Hz)
5	0.005	0.01	0.0025
10	0.02	0.04	0.01
20	0.08	0.16	0.04
1000	0.08	0.16	0.04
2000	0.04	0.08	0.02

FIGURE 2. Random vibration curve for S-8 lamps.

CONCLUDING MATERIAL

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T06:56Z
Check the source to verify that this is the current version before use.

Custodians:
Army - AV
Navy - AS
Air Force - 99

Review activities:
Navy - MC, SH
Air Force - 11, 82
DLA - GS

Preparing activity
Navy - AS
(Project 6240-1441-12)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T06:56Z
Check the source to verify that this is the current version before use.