INCH-POUND

MIL-DTL-6363/13A
30 September 1997
SUPERSEDING
MIL-L-6363/13
25 September 1992

DETAIL SPECIFICATION SHEET

# LAMPS, INCANDESCENT, AIRCRAFT SERVICE, SINGLE CONTACT, BAYONET CANDELABRA BASE, S-11 BULB

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification and MIL-DTL-6363.

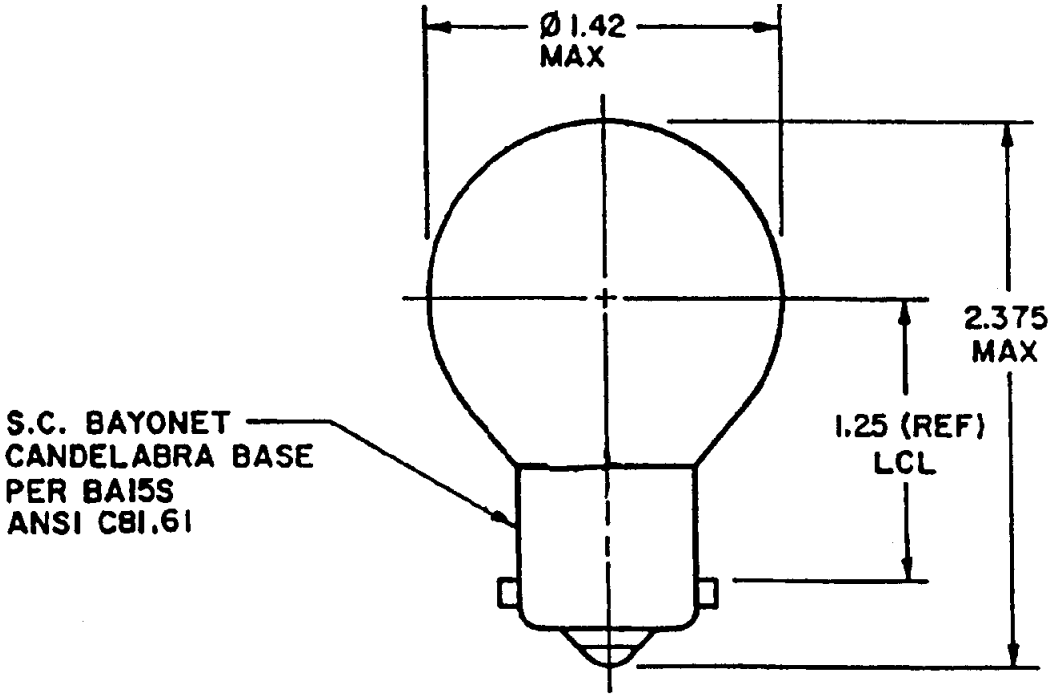



FIGURE 1. Configuration and dimensions.

See NOTES on the next page.



DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T06:57Z
Check the source to verify that this is the current version before use.

NOTES:
1. Dimensions are in inches.
2. Intended use - aircraft indicator and interior lighting applications.
3. For design feature purposes this specification takes precedence over procurement documents referenced herein.
4. Qualification by similarity - Lamp M6363/13-2 is required to be fully qualified in accordance with table I of MIL-DTL-6363. M6363/13-1 may be granted qualification by similarity and extension of qualification from M6363/13-2 with no additional testing. M6363/13-1R may be granted qualification by similarity and extension of qualification from M6363/12-4R with no additional testing. Refer to MIL-DTL-6363 for conditions and data requirements for qualification.

REQUIREMENTS:

1. Configuration and dimensions: See figure 1

2. Finish: Glass globe finish shall be as indicated in table I. Red lamps shall conform to MIL-C-25050 for instrument and panel lighting red.

TABLE I. Part or identifying numbers (PIN) and operating characteristics.

| Part or Identifying Number (PIN) | Type MIL-DTL-6363 | Bulb Finish | Shock Test Level (G's) | Electrical Ratings | | | Filament Style 1/ | MSCD ±25% | Average Rated Lab Life at DC |
|---|---|---|---|---|---|---|---|---|---|
| | | | | Volts (Nom) | Amperes (±10%) | Watts (Max) | | Candelas | Hours |
| M6363/13-1 | I | Clear | 50 | 28.0 | 1.29 | 39.7 | C-2V | 50 | 300 |
| M6363/13-1R | | Red | | 28.0 | 1.29 | 39.7 | C-2V | 2/ | 300 |
| M6363/13-2 3/ | | Clear | | 28.0 | 1.29 | 39.7 | C-2V | 44 | 1,000 |

1/ C-2V are supported filaments.

2/ Rated candlepower for -1R applies to clear lamp before coating is applied.

3/ M6363/13-2 is used on exterior lighting applications.


3. Lamp operating characteristics: When operating at rated voltage, the lamp operating characteristics shall be as specified in table I.

4. Coating adhesion: Applicable to exterior coated colored lamps.

5. High temperature: Applicable for qualification tests only (85°C/185F°).



Source: https://assist.dla.mil -- Downloaded: 2026-10-17T06:57Z
Check the source to verify that this is the current version before use.

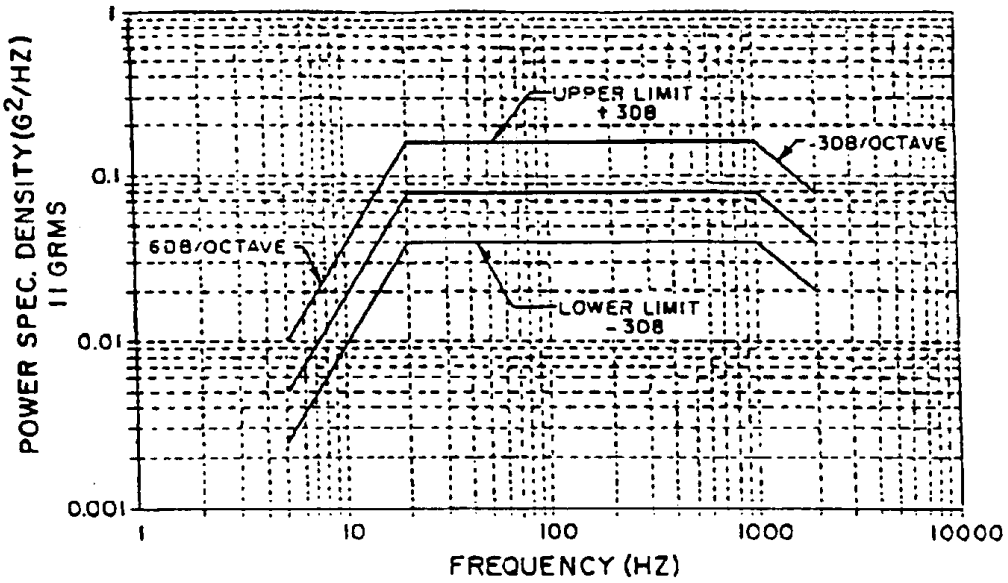


| Freq Hz | Vibration Level PSD ($G^2$/Hz) | Upper Limit (+3 DB) PSD ($G^2$/Hz) | Lower Limit (-3 DB) PSD ($G^2$/Hz) |
|---|---|---|---|
| 5 | 0.005 | 0.01 | 0.0025 |
| 10 | 0.02 | 0.04 | 0.01 |
| 20 | 0.08 | 0.16 | 0.04 |
| 1000 | 0.08 | 0.16 | 0.04 |
| 2000 | 0.04 | 0.08 | 0.02 |

FIGURE 2A. Random vibration curve for S-11 lamps.

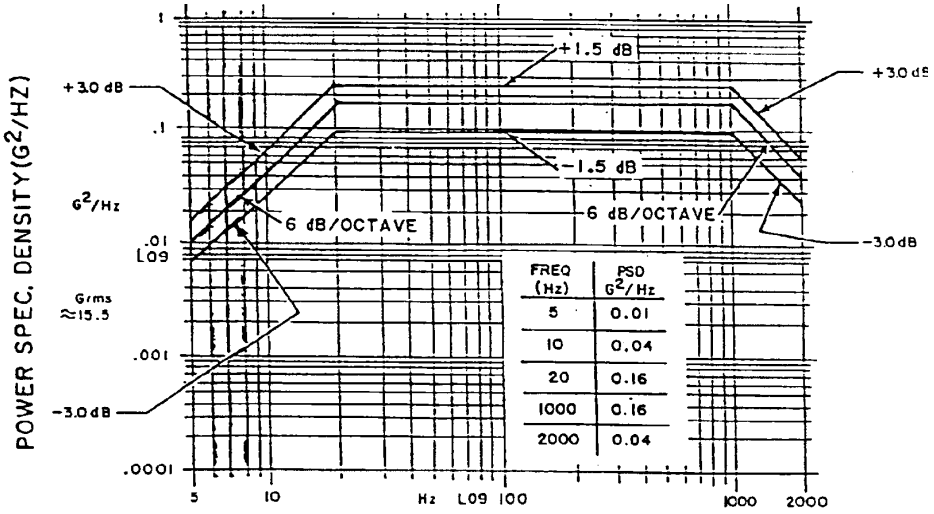



FIGURE 2B. Random vibration curve for M6363/13-2 lamp.



Source: https://assist.dla.mil -- Downloaded: 2026-10-17T06:57Z
Check the source to verify that this is the current version before use.

6. Thermal shock: Applicable for qualification tests only. Use temperatures for Type I lamps..

7. Random vibration: Applicable for qualification tests only. See figure 2 for random vibration curve.


8. Shock: Applicable for qualification tests only. See table I for applicable “g” level.

9. Humidity: Applicable for qualification tests only.

10. Salt spray: Applicable for qualification tests only.

11. Marking: Production lamps qualified to MIL-DTL-6363 and listed on QPL-6363 shall be marked in accordance with ANSI-C78.390 and as supplemented herein. ANSI-C78.390 authorized suffix letters shall be supplemented with the letter “Q” (MIL-DTL-6363 QPL item). The letter “Q” shall be incorporated into the method of designation in accordance with the following example:

EXAMPLE

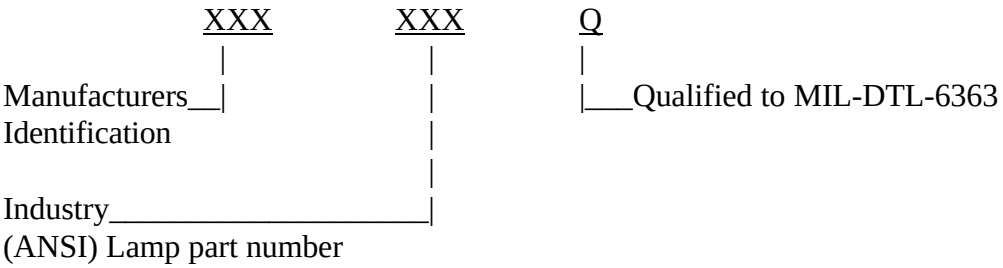


12. Interchangeability: These lamps may be similar to, but are not interchangeable with, other commercial or military lamps due to unique aircraft applications and qualification.

There are no technical changes in this revision.



Source: https://assist.dla.mil -- Downloaded: 2026-10-17T06:57Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army - AV
Navy - AS
Air Force - 99

Review activities:
Navy - MC, SH
Air Force - 11, 82
DLA - GS

Preparing activity
Navy - AS
(Project 6240-1441-13)



Source: https://assist.dla.mil -- Downloaded: 2026-10-17T06:57Z
Check the source to verify that this is the current version before use.