INCH-POUND

MIL-DTL-6363/1C
30 September 1997
SUPERSEDING
MIL-L-6363/1B
15 September 1989

DETAIL SPECIFICATION SHEET

# LAMPS, INCANDESCENT, AIRCRAFT USE, SINGLE CONTACT BAYONET CANDELABRA BASE, REFLECTOR TYPE

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification and MIL-DTL-6363.

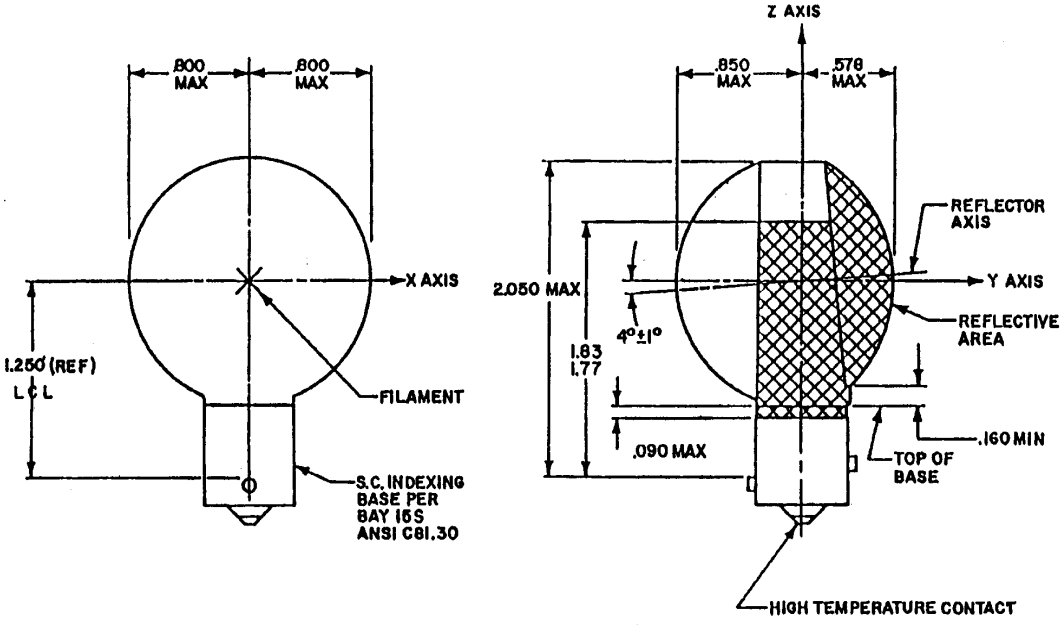



FIGURE 1. Configuration and dimensions.

See NOTES on the next page.



DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T06:54Z
Check the source to verify that this is the current version before use.

NOTES:
1. Dimensions are in inches. Unless otherwise specified, tolerances: decimals ±0.010 inch, angles ±0.5°.
2. Intended use - aircraft navigational light assemblies conforming to MIL-L-21652 (MS21972 and MS25277) and similar.
3. For design feature purposes, this specification takes precedence over procurement documents referenced herein.

REQUIREMENTS:

1. Configuration and dimensions: See figure 1.

2. Finish: Glass globe shall be clear except where reflector surface is required.

3. Lamp operating characteristics: When operating at rated voltage (DC), the lamp operating characteristics shall be as specified in table I.

TABLE I. Part numbers and operating characteristics.

| Military Part Number | Type Per MIL-DTL-6363 | Temp Rating Continuous Operation 1/ | | Shock Test Level (G's) | Electrical Ratings | | | Average Rated Lab Life at DC |
|---|---|---|---|---|---|---|---|---|
| | | °C | °F | | Volts (Nom) | Amperes (Max) | Watts (Max) | Hours |
| M6363/1-1 | II | 113 | 235 | 90 | 28.0 | 1.55 | | |
| M6363/1-2 | II | 139 | 275 | 90 | 28.0 | 1.55 | 43 | 150 |
| M6363/1-3 | II | 113 | 235 | 135 | 6.2 | 6.93 | | |

1/ For 70 percent of average rated lab life.

4. Light distribution:

Beam candlepower, 4,800 candelas on reflector axis.

Horizontal and vertical beam spread to 480 candela points, 20° minimum.


5. Coating adhesion: Applicable.

6. High temperature: See table I for applicable high temperature rating.

7. Thermal shock: See table I for applicable high temperature rating.



Source: https://assist.dla.mil -- Downloaded: 2026-10-17T06:54Z
Check the source to verify that this is the current version before use.

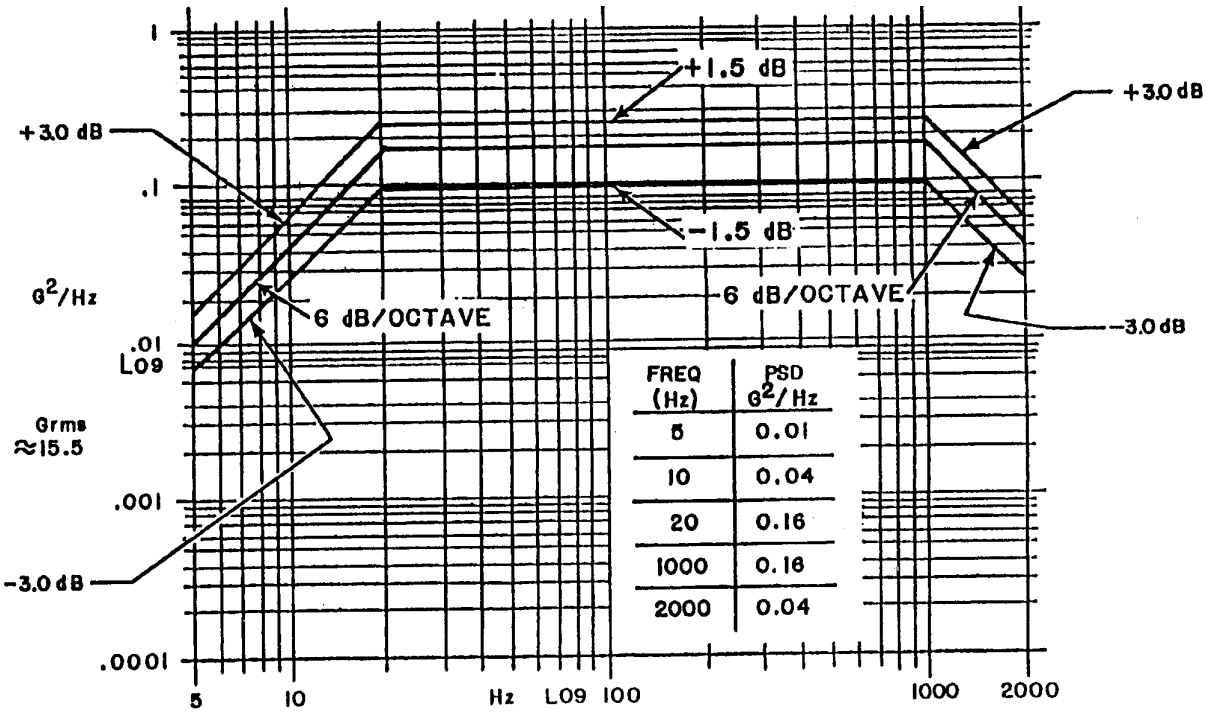


| FREQ (Hz) | PSD $G^2/Hz$ |
|---|---|
| 5 | 0.01 |
| 10 | 0.04 |
| 20 | 0.16 |
| 1000 | 0.16 |
| 2000 | 0.04 |

FIGURE 2. Random vibration curve for 28v lamps.



Source: https://assist.dla.mil -- Downloaded: 2026-10-17T06:54Z
Check the source to verify that this is the current version before use.

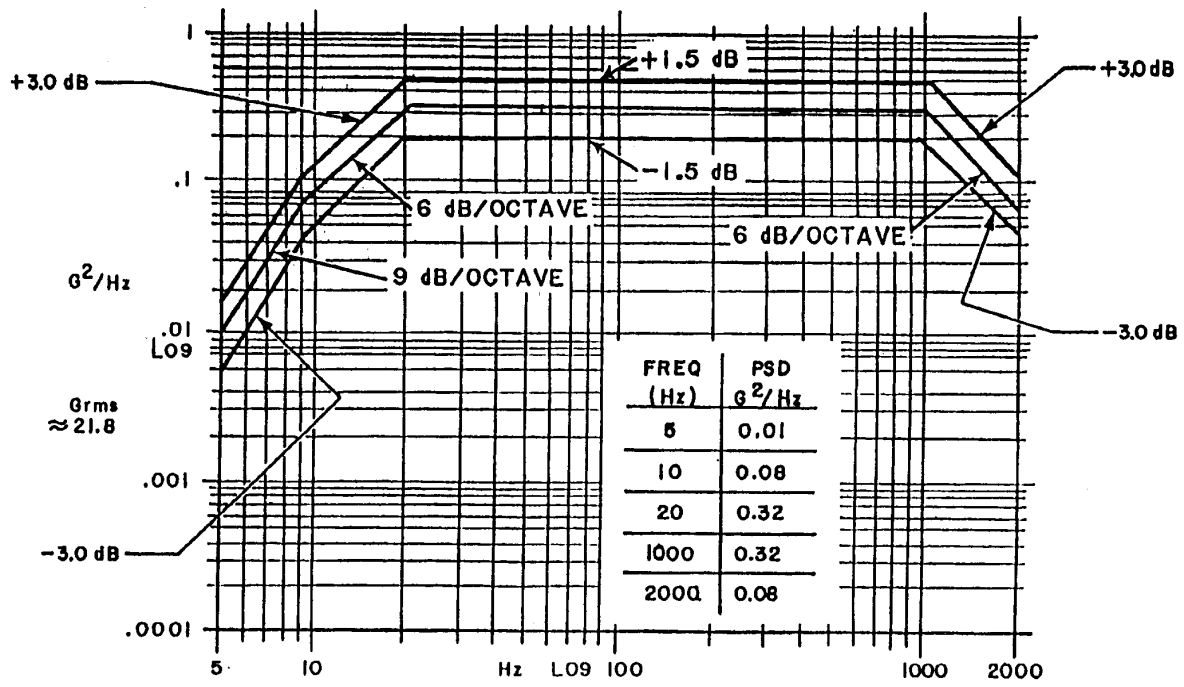



FIGURE 3. Random vibration curve for 6.2v lamps.

8. Random vibration: See figure 2 for 28.0v lamp and figure 3 for 6.2v lamp random vibration curves.



Source: https://assist.dla.mil -- Downloaded: 2026-10-17T06:54Z
Check the source to verify that this is the current version before use.

9. Shock: See table I for applicable “g” level.

10. Humidity: Applicable.

11. Salt spray: Applicable.

12. Inspection lot vibration screening: Sample size and acceptance level as specified by the procuring activity.

13. Marking: Lamps shall be marked with the applicable military part number from table I, voltage rating, manufacturing lot code, and the manufacturer’s name, CAGE code, abbreviation or trademark. Other military or commercial lamp numbers shall not be marked on the lamps.

14. Interchangeability: These lamps may be similar to, but are not interchangeable with, other commercial or military lamps due to unique aircraft applications and qualification.

There are no technical changes in this revision.

## CONCLUDING MATERIAL

Custodians:
Army - AV
Navy - AS
Air Force - 99

Review activities:
Navy - MC, SH
Air Force - 11, 82
DLA - GS

Preparing activity
Navy - AS
(Project 6240-1441-01)



Source: https://assist.dla.mil -- Downloaded: 2026-10-17T06:54Z
Check the source to verify that this is the current version before use.