INCH-POUND

MIL-L-6363/2B
15 September 1989
SUPERSEDING
MIL-L-6363/2A
8 February 1988

MILITARY SPECIFICATION SHEET

LAMPS, INCANDESCENT, AIRCRAFT USE, SINGLE CONTACT BAYONET CANDELABRA BASE, REFLECTOR TYPE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the incandescent lamps described herein shall consist of this specification and the latest issue of MIL-L-6363.

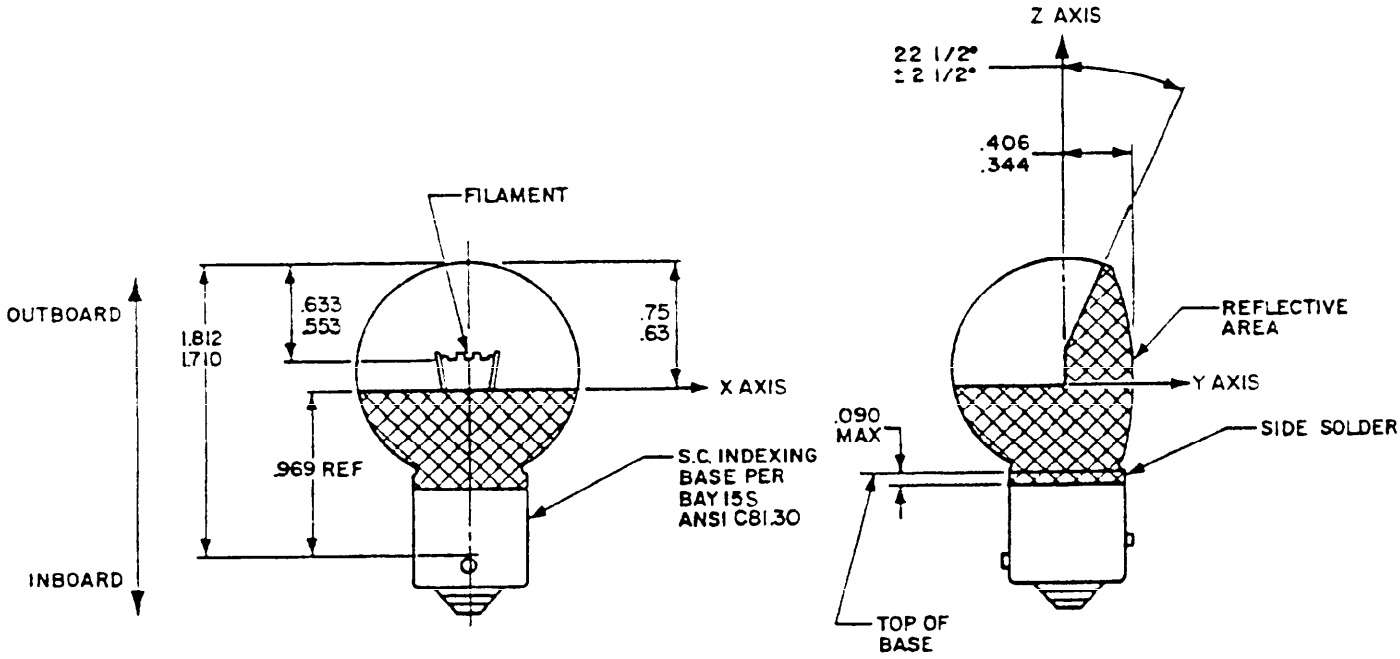


FIGURE 1. Configuration and dimensions.

NOTES:

1. Dimensions are in inches. Unless otherwise specified, tolerances: Decimals ±.010 inch, angles ±1/2°.
2. Intended use - aircraft navigational light assemblies.
3. For design feature purposes, this specification takes precedence over procurement documents referenced herein.

AMSC N/A FSC 6240

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T06:54Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

1. Configuration and dimensions: See figure 1.

2. Finish: Glass globe shall be clear except where reflector surface is required.

3. Lamp operating characteristics: When operated at rated voltage (DC), the lamp operating characteristics shall be as specified in table I.

TABLE I. Part numbers and operating characteristics.

Military Part No.	Type Per MIL-L-6363	Temp Rating Continuous Operation 1/		Shock Test Level (G's)	Electrical Ratings			Average Rated Lab Life at DC
		°C	°F		Volts (Nom)	Amperes (Max)	Watts (Max)	Hours
M6363/2-1	II	140	285	135	6.2	4.56	28	300
M6363/2-2	II	140	285	90	28.0	1.00	28	

1/ For 70% of average rated lab life.

4. Light distribution: See tables II and III.

TABLE II. Light distribution (horizontal plane).

LIGHT DISTRIBUTION IN HORIZONTAL PLANE CONTAINING FLIGHT AXIS (0°) AND PASSING THROUGH LIGHT CENTER AND CENTER OF INDEXING PINS

Military Part No.	Beam Candlepower Candelas (Minimum)	Angle of Distribution
M6363/2-1	200	2° inboard to 15° outboard
	25	15° outboard to 100° outboard
M6363/2-2	200	2° inboard to 15° outboard
	25	15° outboard to 100° outboard

Source: https://assist.dla.mil -- Downloaded: 202640-17T06:54Z
Check the source to verify that this is the current version before use.

TABLE III. Light distribution (vertical plane).

LIGHT DISTRIBUTION IN VERTICAL PLANE CONTAINING FLIGHT AXIS (0°) AND PASSING THROUGH LIGHT CENTER AND PERPENDICULAR TO HORIZONTAL PLANE ABOVE

Military Part No.	Beam Candlepower Candelas (Minimum)	Angle of Distribution
M6363/2-1	180	0° to 20° above and below flight axis
	20	20° to 80° above and below flight axis
M6363/2-2	180	0° to 20° above and below flight axis
	20	20° to 80° above and below flight axis

5. Coating adhesion: Applicable.

6. High temperature: See table I for applicable high temperature rating.

7. Thermal shock: See table I for applicable high temperature rating.

8. Random vibration: See figure 2 for 28.0 V lamp and figure 3 for 6.2 V lamp random vibration curves.

9. Shock: See table I for applicable "g" level.

10. Humidity: Applicable.


11. Salt spray: Applicable.

12. Inspection lot vibration screening: Sample size and acceptance level as specified by the procuring activity.

13. Marking: Lamps shall be marked with the applicable military part number from table I, voltage rating, manufacturing lot code, and the manufacturer's name, CAGE code, abbreviation or trademark. Other military or commercial lamp numbers shall not be marked on the lamps.

14. Interchangeability: These lamps may be similar to, but are not interchangeable with, other commercial or military lamps due to unique aircraft applications and qualification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T06:54Z
Check the source to verify that this is the current version before use.

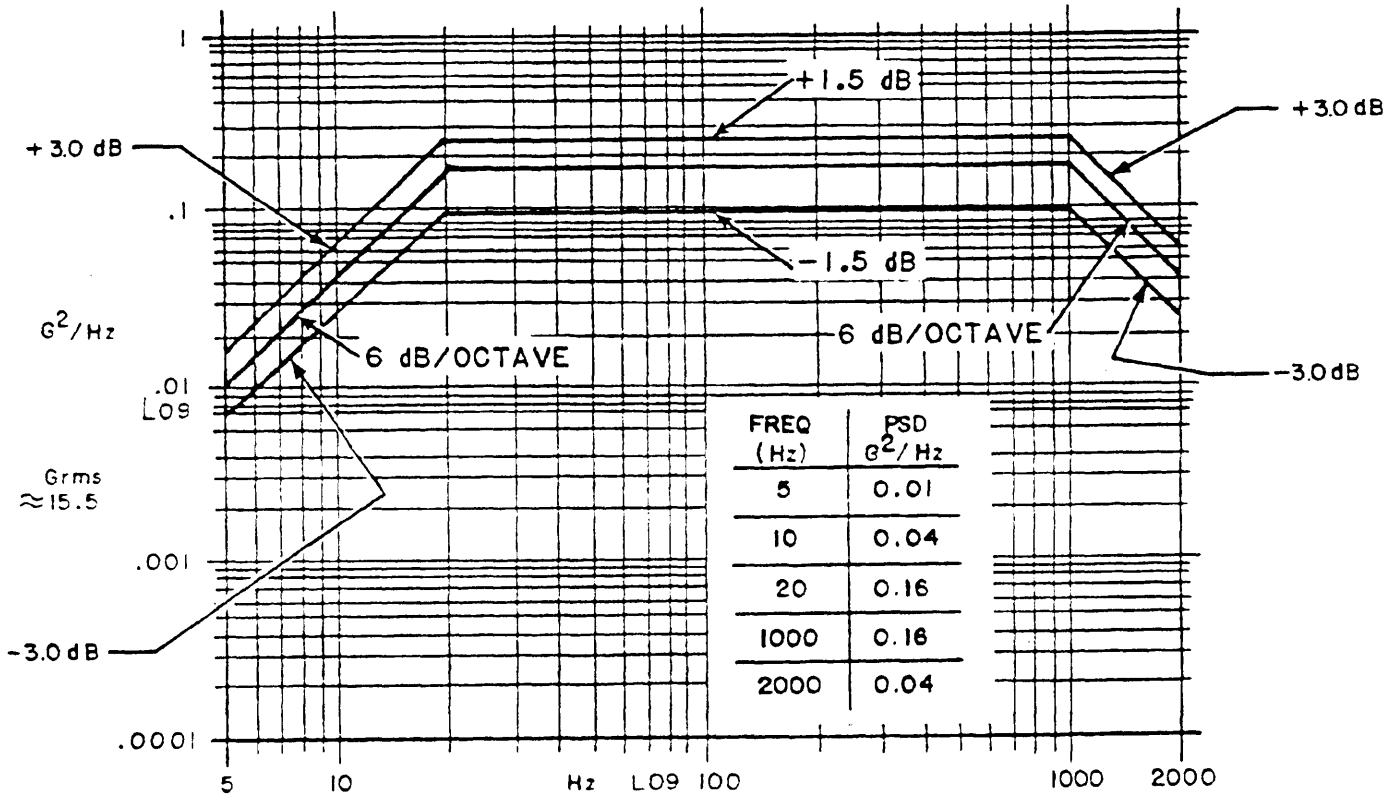

FREQ (Hz)	PSD G^2/Hz
5	0.01
10	0.04
20	0.16
1000	0.16
2000	0.04

FIGURE 2. Random vibration curve for 28 V lamps.

Source: https://assist.dla.mil -- Downloaded: 20261O-17T06:54Z
Check the source to verify that this is the current version before use.

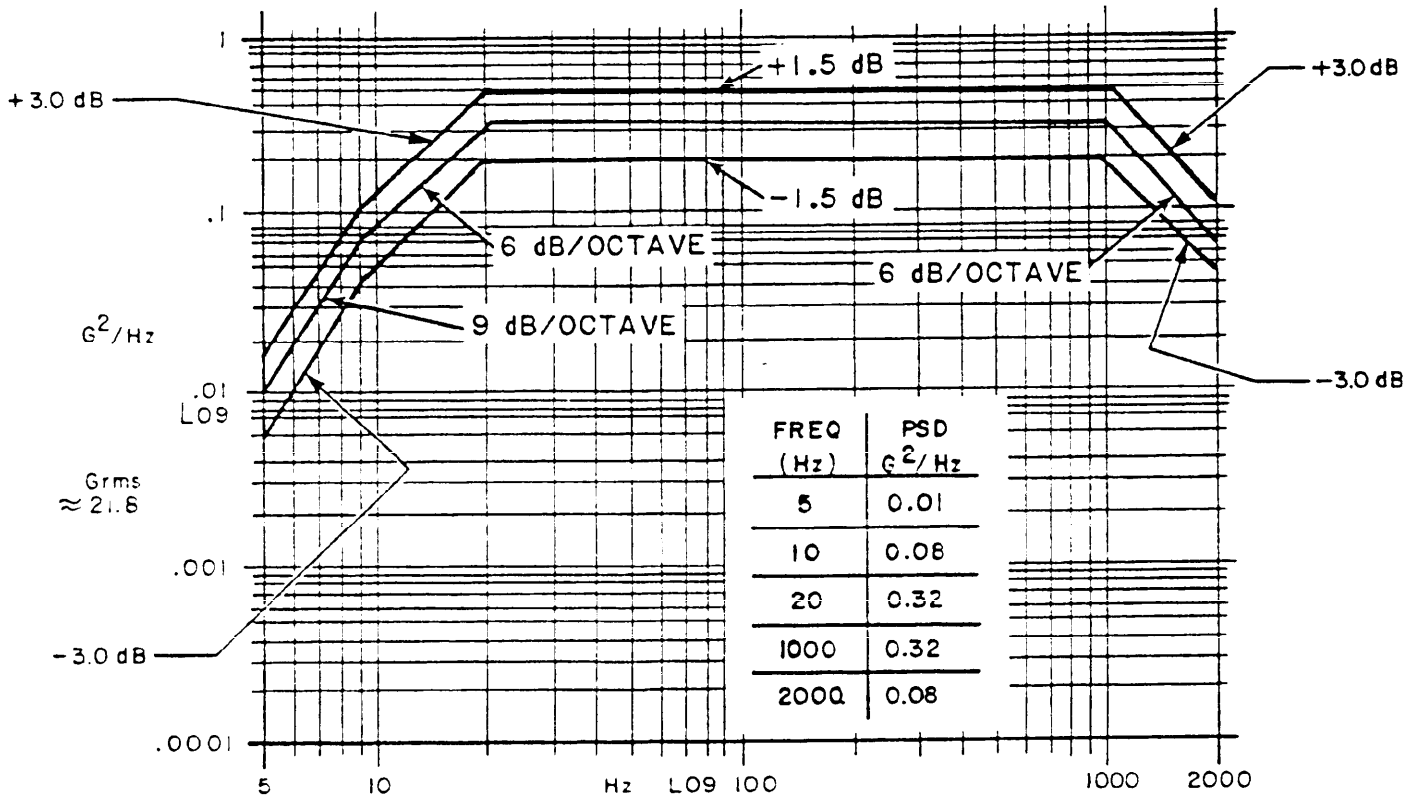


FIGURE 3. Random vibration curve for 6.2 V lamps.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T06:54Z
Check the source to verify that this is the current version before use.

Revision letters are not used to denote changes due to the extensiveness of the changes.

Custodians:
Army - AV
Air Force - 99
Navy - AS

Review activities:
Army -
Air Force - 82, 11
Navy - MC, SH
DLA - GS

Preparing activity:
Navy - AS
(Project 6240-1119-02)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T06:54Z
Check the source to verify that this is the current version before use.