MIL-L-6363/3C
05 November 1990
SUPERSEDING
MIL-L-6363/3B
15 September 1989

MILITARY SPECIFICATION SHEET

LAMPS, INCANDESCENT, AIRCRAFT USE, SINGLE CONTACT BAYONET CANDELABRA BASE, REFLECTOR TYPE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the incandescent lamps described herein shall consist of this specification and the latest issue of MIL-L-6363.

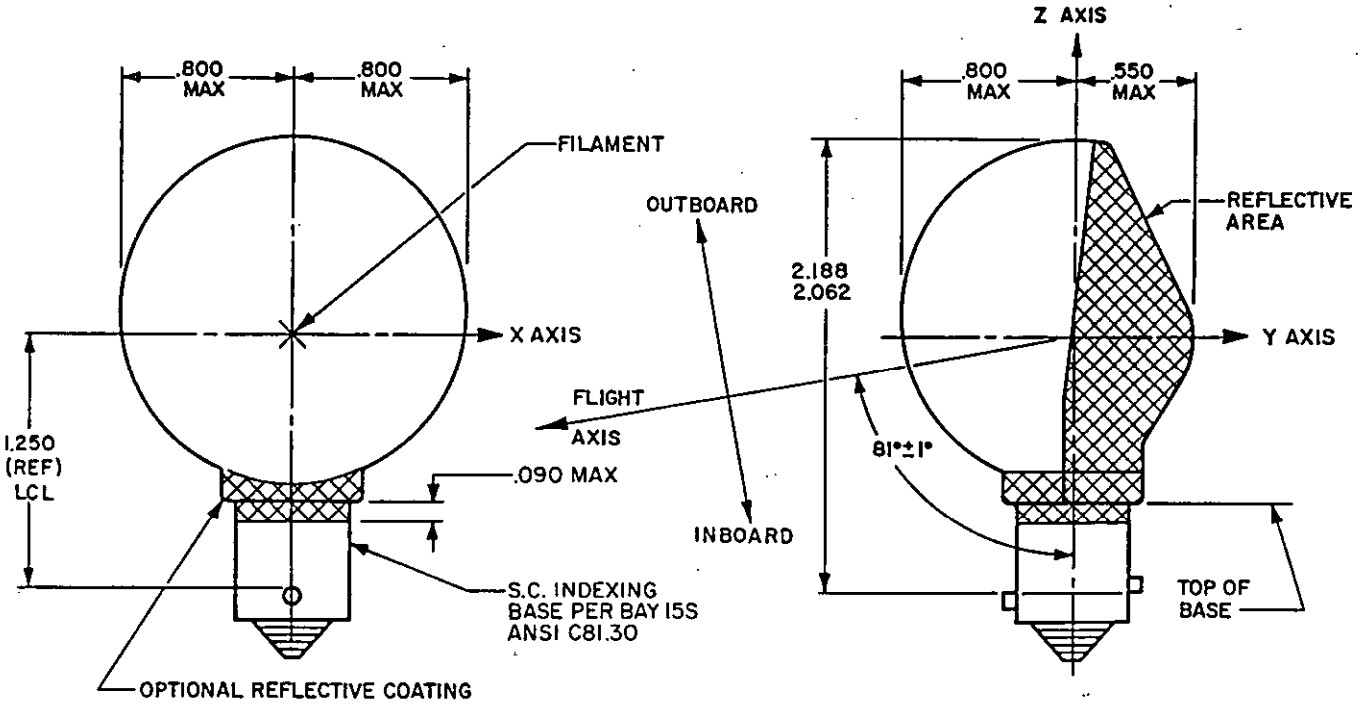


FIGURE 1. Configuration and dimensions.

NOTES:

1. Dimensions are in inches. Unless otherwise specified, tolerances: Decimals ±.010 inch, angles ±1/2°.
2. Intended use - aircraft navigational light assemblies.
3. For design feature purposes, this specification takes precedence over procurement documents referenced herein.

Ⓒ DENOTES CHANGES

AMSC N/A FSC 6240

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T06:55Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

1. Configuration and dimensions: See figure 1.

2. Finish: Glass globe shall be clear except where reflector surface is required.

3. Lamp operating characteristics: When operated at rated voltage (DC), the lamp operating characteristics shall be as specified in table I.

TABLE I. Part numbers and operating characteristics.

Military Part No.	Type Per MIL-L-6363	Temp Rating Continuous Operation 1/		Shock Test Level (G's)	Electrical Ratings			Average Rated Lab Life at DC
		°C	°F		Volts (Nom)	Amperes (Max)	Watts (Max)	Hours
M6363/3-1	II	113	235	90	28.0	1.55	43	300
M6363/3-2	II	113	235	135	6.2	6.93		

1/ For 70% of average rated lab life.

4. Light distribution: See tables II and III.

TABLE II. Light distribution (horizontal plane).

LIGHT DISTRIBUTION IN HORIZONTAL PLANE CONTAINING FLIGHT AXIS (0°) AND PASSING THROUGH LIGHT CENTER AND CENTER OF INDEXING PINS

Beam Candlepower Candelas (Minimum)	Angle of Distribution
300	0° forward to 30° outboard
150	30° outboard to 40° outboard
120	40° outboard to 50° outboard
50	50° outboard to 100° outboard

TABLE III. Light distribution (vertical plane).

LIGHT DISTRIBUTION IN VERTICAL PLANE CONTAINING FLIGHT AXIS (0°) AND PASSING THROUGH LIGHT CENTER AND PERPENDICULAR TO HORIZONTAL PLANE ABOVE

Beam Candlepower Candelas (Minimum)	Angle of Distribution
300	0° to 20° above and below flight axis
60	20° to 40° above and below flight axis
30	40° to 85° above and below flight axis

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T06:55Z
Check the source to verify that this is the current version before use.

5. Coating adhesion: Applicable.

6. High temperature: See table I for applicable high temperature rating.

7. Thermal shock: See table I for applicable high temperature rating.

8. Random vibration: See figure 2 for 28 V lamp and figure 3 for 6.2 V lamp random vibration curves.

9. Shock: See table I for applicable "g" level.

10. Humidity: Applicable.

11. Salt spray: Applicable.

12. Inspection lot vibration screening: Sample size and acceptance level as specified by the procuring activity.

13. Marking: Lamps shall be marked with the applicable military part number from table I, voltage rating, manufacturing lot code, and the manufacturer's name, CAGE code, abbreviation or trademark. Other commercial or military lamp numbers shall not be marked on the lamps.

14. Interchangeability: These lamps may be similar to, but are not interchangeable with, other commercial or military lamps due to unique aircraft applications and qualification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T06:55Z
Check the source to verify that this is the current version before use.

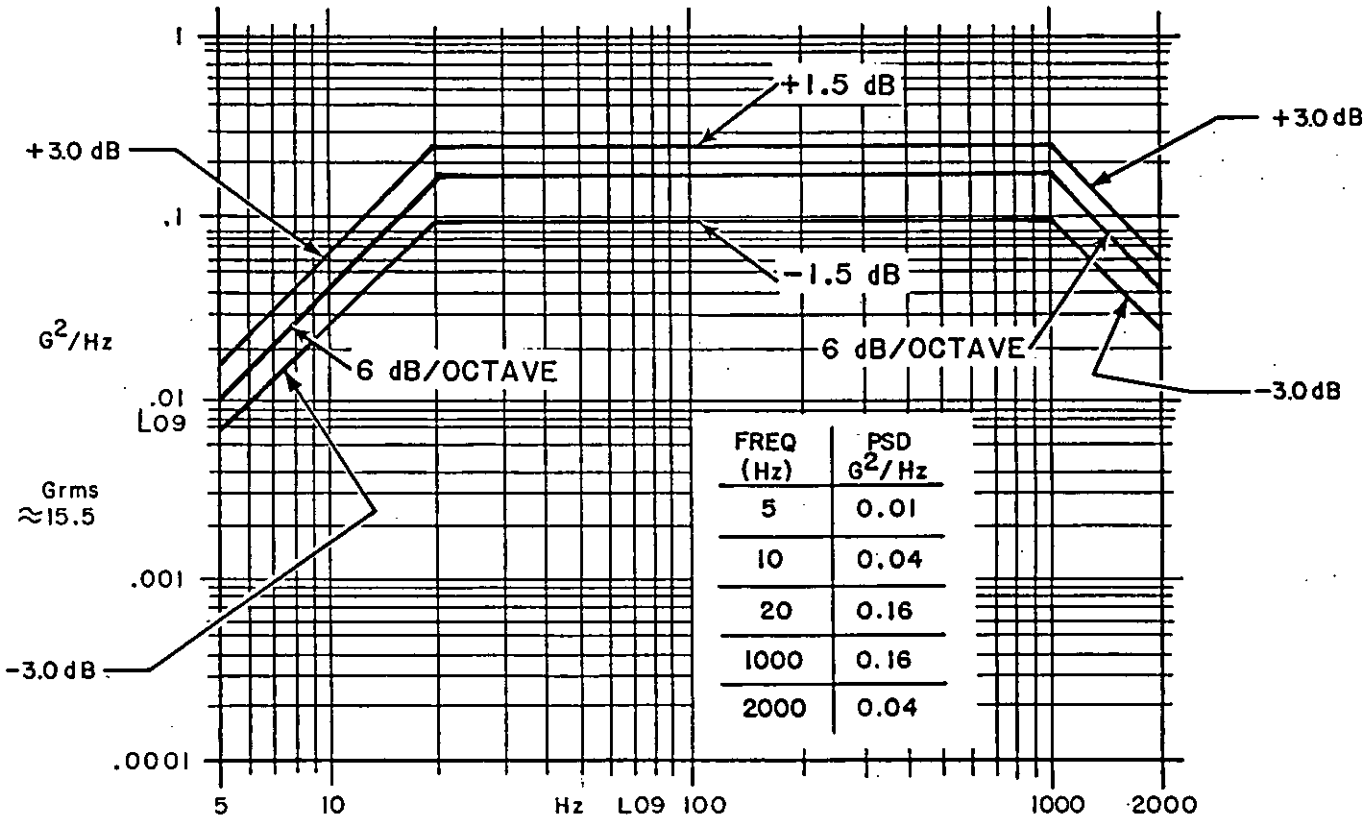


FIGURE 2. Random vibration curve for 28 V lamps.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T06:55Z
Check the source to verify that this is the current version before use.

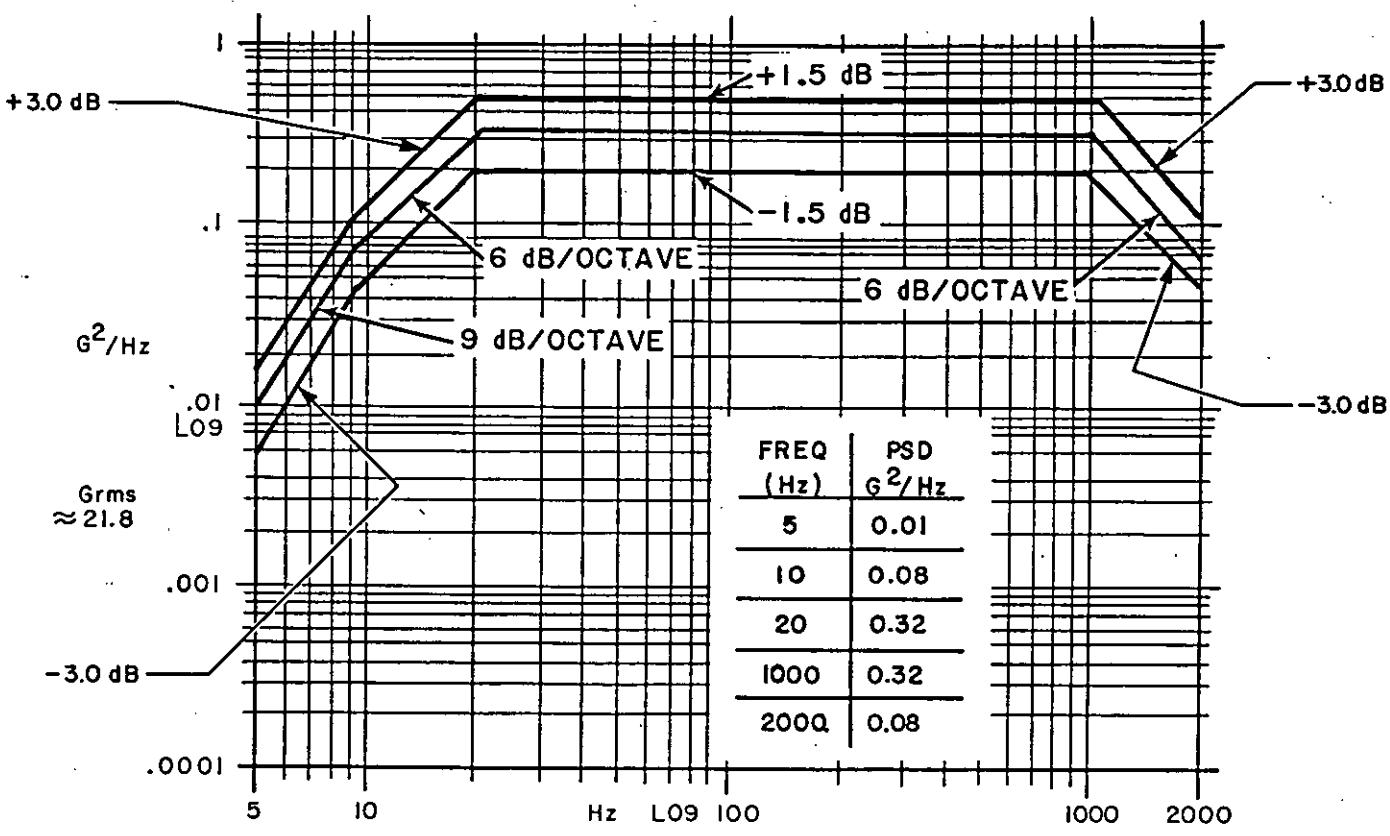


FIGURE 3. Random vibration curve for 6.2 V lamps.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T06:55Z
Check the source to verify that this is the current version before use.

Custodians:
Army - AV
Air Force - 99
Navy - AS

Review activities:
Army -
Air Force - 82, 11
Navy - MC, SH
DLA - GS

Preparing activity:
Navy - AS
(Project 6240-1244)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T06:55Z
Check the source to verify that this is the current version before use.