INCH-POUND

MIL-L-6363/7
13 September 1993

MILITARY SPECIFICATION SHEET

LAMPS, INCANDESCENT, AIRCRAFT SERVICE, SUBMINIATURE
KNURLED SCREW BASE, T-1-1/4 BULB

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation: MIL-L-6363

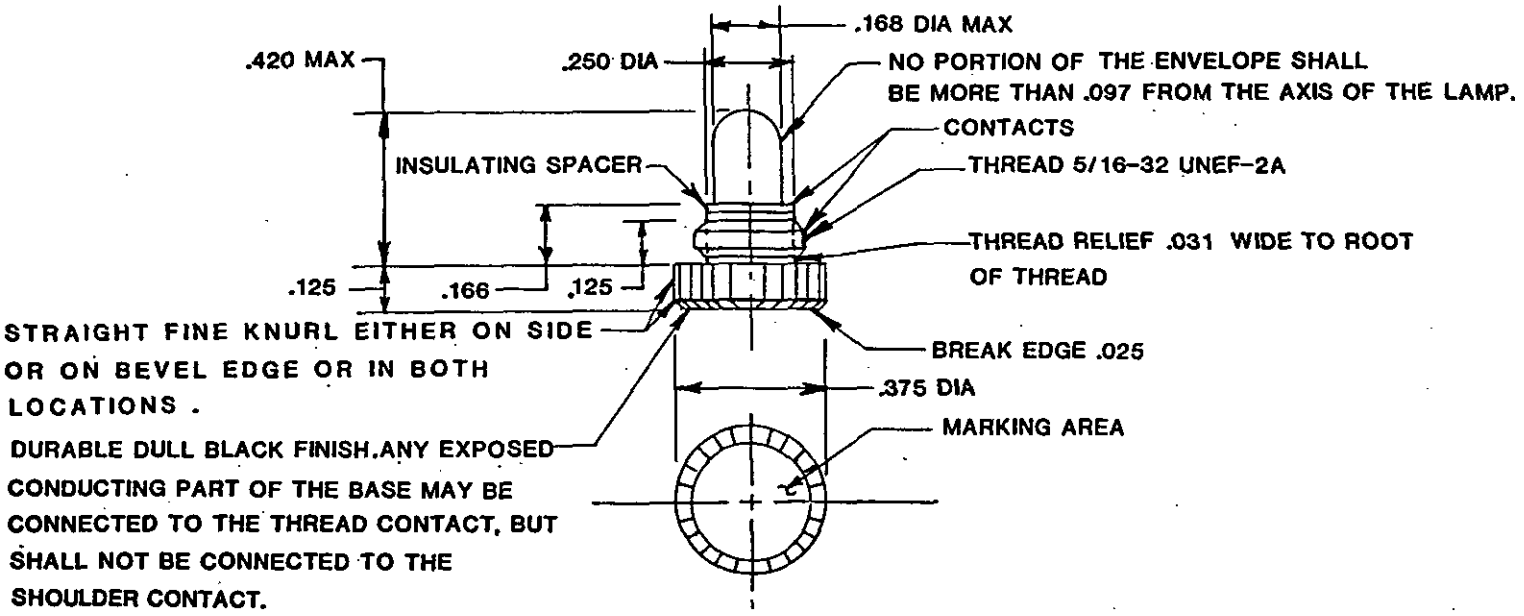


FIGURE 1. Configuration and dimensions.

AMSC N/A FSC 6240

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T06:55Z
Check the source to verify that this is the current version before use.

TABLE I. Part or identifying numbers (PIN) and operating characteristics.

Part or Identifying No. (PIN)	Type Per MIL-L-6363	Bulb Finish	Shock Test Level (G's)	Electrical Ratings			Filament Style	MSCD +25% 1/	Average Rated Lab Life at DC
				Volts (Nom)	Amperes (+10%)	Watts (Max)		Candelas	Hours
M6363/7-1	I	Clear	50	3.0	.19	.06	C-2R	.25	350
M6363/7-1R		Red		3.0	.19	.06	C-2R	.25	350
M6363/7-2		Clear		6.0	.20	.13	C-2R	.63	1,000
M6363/7-3		Clear		28.0	.04	1.12	C-2F	.34	1,000
M6363/7-3R		Red		28.0	.04	1.12	C-2F	.34	1,000

1/ MSCD for colored lamps applies to clear lamp before coating is applied.

REQUIREMENTS

1. Configuration and dimensions: See figure 1.

2. Finish: Glass globe finish shall be as indicated in table I. Red lamps shall conform to MIL-C-25050 for instrument and panel lighting red.

3. Lamp operating characteristics: When operated at rated voltage, the lamp operating characteristics shall be as specified in table I.

4. Coating adhesion: Applicable to exterior coated colored lamps.

5. High temperature: Applicable for qualification tests only (85°C/185°F).

6. Thermal shock: Applicable for qualification tests only - Use temperatures for Type I lamps.


7. Random vibration: Applicable for qualification tests only - See figure 2 for random vibration curve.

8. Shock: Applicable for qualification tests only - See table I for applicable "g" level.

9. Humidity: Applicable for qualification tests only.

10. Salt spray: Applicable for qualification tests only.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T06:55Z
Check the source to verify that this is the current version before use.

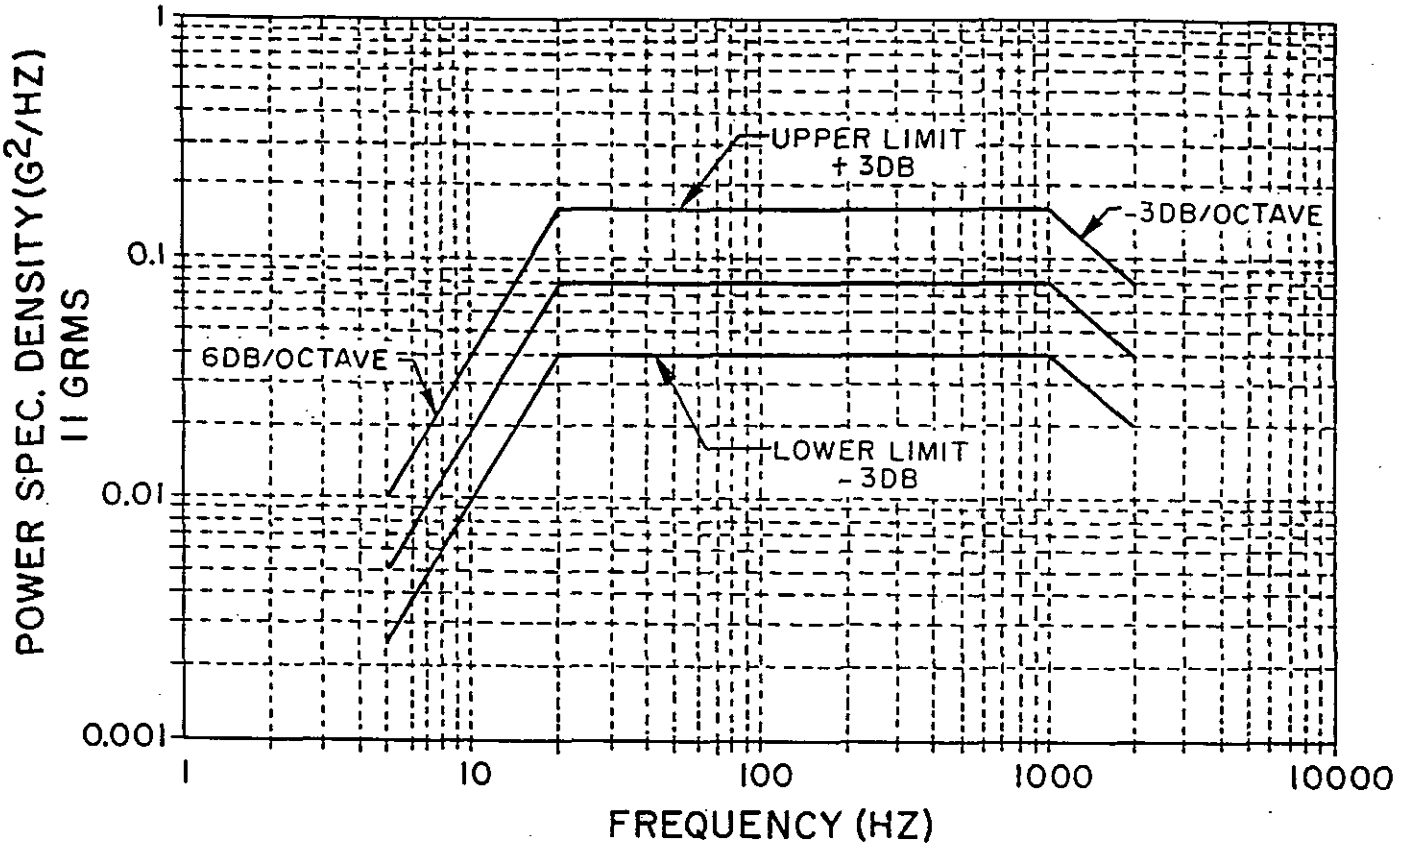


Freq Hz	Vibration Level PSD (G^2/Hz)	Upper Limit (+3 DB) PSD (G^2/Hz)	Lower Limit (-3 DB) PSD (G^2/Hz)
5	0.005	0.01	0.0025
10	0.02	0.04	0.01
20	0.08	0.16	0.04
1000	0.08	0.16	0.04
2000	0.04	0.08	0.02

FIGURE 2. Random vibration curve for T-1 1/4 lamps.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T06:55Z
Check the source to verify that this is the current version before use.

11. Marking. Lamps shall be marked on the unknurled portion of the screw base as indicated in figure 1. Production lamps qualified to MIL-L-6363 and listed on QPL-6363 shall be marked in accordance with ANSI/NEMA C78.390 and as supplemented herein. ANSI/NEMA C78.390 authorized suffix letters shall be supplemented with the letter "Q" (MIL-L-6363 QPL item). The letter "Q"shall be incorporated into the method of designation in accordance with the following example:

EXAMPLE

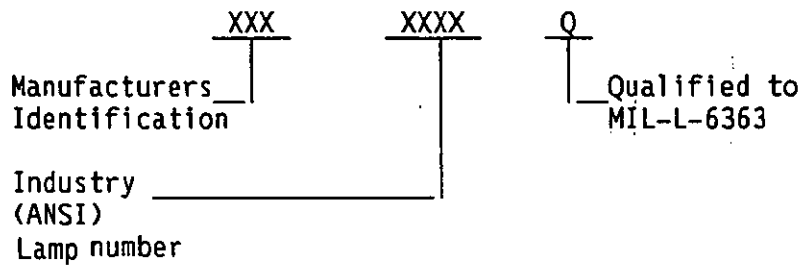

12. Interchangeability: These lamps may be similar to, but are not interchangeable with, other commercial or military lamps due to unique aircraft applications and qualification.

NOTES:

1. Dimensions are in inches. Unless otherwise specified, tolerances: decimals ±.015 inches.
2. Threads shall be in accordance with FED-STD-H28.
3. Intended use - aircraft instrument and indicator assemblies.
4. For design feature purpose , this specification takes precedence over procurement documents referenced herein.

5. Qualification by similarity - Lamp M6363/7-3 is required to be fully qualified in accordance with Table I of MIL-L-6363. All other lamps may be granted qualification by similarity and extension of qualification from M6363/7-3 with no additional testing. Red lamp M6363/7-1R may be granted qualification status based upon qualification approval of the -3R lamp. Refer to MIL-L-6363 for conditions and data requirements for qualification.

Custodians:
Army - AV
Air Force - 99
Navy - AS

Review activities:
Army -
Air Force - 82, 11
Navy - MC, SH
DLA - GS

Preparing activity:
(Navy - AS)
(Project No. 6240-1009-7)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T06:55Z
Check the source to verify that this is the current version before use.