INCH-POUND

MIL-DTL-6363/7A
30 September 1997
SUPERSEDING
MIL-L-6363/7
13 September 1993

DETAIL SPECIFICATION SHEET

# LAMPS, INCANDESCENT, AIRCRAFT SERVICE, SUBMINIATURE KNURLED SCREW BASE, T-1-1/4 BULB

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification and MIL-DTL-6363.

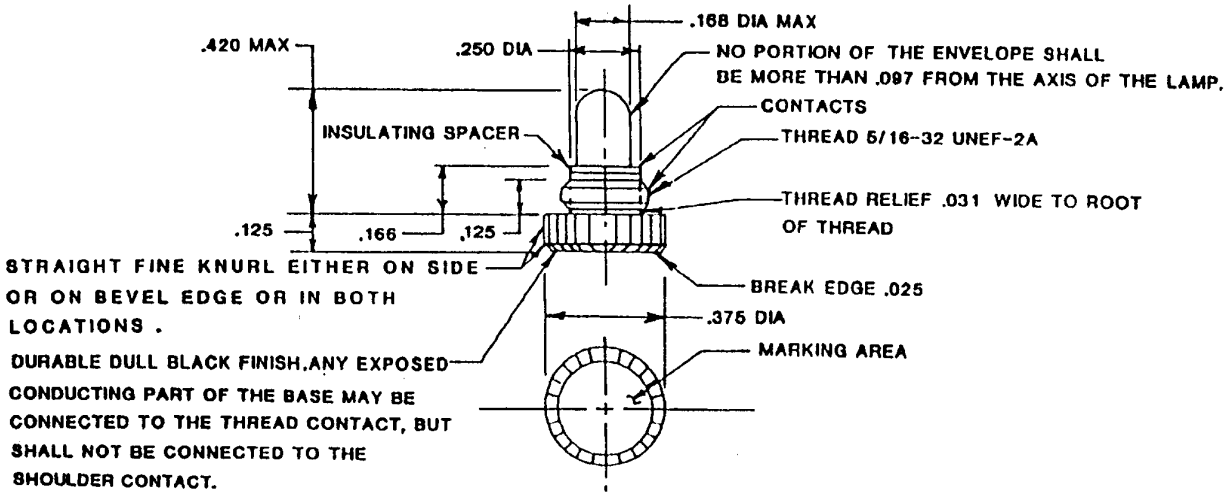



FIGURE 1. Configuration and dimensions.

See NOTES on the next page.



DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T06:55Z
Check the source to verify that this is the current version before use.

NOTES:

1. Dimensions are in inches. Unless otherwise specified, tolerances: decimals ±0.015 inch.
2. Threads shall be in accordance with FED STD-H28.
3. Intended use - aircraft instrument and indicator assemblies.
4. For design feature purposes, this specification takes precedence over procurement documents referenced herein.
5. Qualification by similarity - Lamp M6363/7-3 is required to be fully qualified in accordance with table I of MIL-DTL-6363. All other lamps may be granted qualification by similarity and extension of qualification from M6363/7-3 with no additional testing. Red lamp M6363/7-1R may be granted qualification status based upon qualification approval of the -3R lamp. Refer to MIL-DTD-6363 for conditions and data requirements for qualification.

REQUIREMENTS:

1. Configuration and dimensions: See figure 1.

2. Finish: Glass globe finish shall be as indicated in table I. Red lamps shall conform to MIL-C-25050 for instrument and panel lighting red.

TABLE I. Part or identifying numbers (PIN) and operating characteristics.

| Part or Identifying Number (PIN) | Type MIL-DTL-6363 | Bulb Finish | Shock Test Level (G's) | Electrical Ratings | | | Filament Style | MSCD ±25% 1/ | Average Rated Lab Life at DC |
|---|---|---|---|---|---|---|---|---|---|
| | | | | Volts (Nom) | Amperes (±10%) | Watts (Max) | | Candelas | Hours |
| M6363/7-1 | I | Clear | 50 | 3.0 | 0.19 | 0.06 | C-2R | 0.25 | 350 |
| M6363/7-1R | | Red | | 3.0 | 0.19 | 0.06 | C-2R | 0.25 | 350 |
| M6363/7-2 | | Clear | | 6.0 | 0.20 | 0.13 | C-2R | 0.63 | 1,000 |
| M6363/7-3 | | Clear | | 28.0 | 0.04 | 1.12 | C-2F | 0.34 | 1,000 |
| M6363/7-3R | | Red | | 28.0 | 0.04 | 1.12 | C-2F | 0.34 | 1,000 |

1/ MSCD for colored lamps applies to clear lamp before coating is applied.

3. Lamp operating characteristics: When operating at rated voltage, the lamp operating characteristics shall be as specified in table I.

4. Coating adhesion: Applicable to exterior coated colored lamps.

5. High temperature: Applicable for qualification tests only (85°C/185F°).

6. Thermal shock: Applicable for qualification tests only. Use temperatures for Type I lamps..



Source: https://assist.dla.mil -- Downloaded: 2026-10-17T06:55Z
Check the source to verify that this is the current version before use.

7. Random vibration: Applicable for qualification tests only. See figure 2 for random vibration curve.


8. Shock: Applicable for qualification tests only. See table I for applicable “g” level.

9. Humidity: Applicable. for qualification tests only.

10. Salt spray: Applicable for qualification tests only.

11. Marking: Lamps shall be marked on the unknurled portion of the screw base as indicated in figure 1 . Production lamps qualified to MIL-DTL-6363 and listed on QPL-6363 shall be marked in accordance with ANSI-C78.390 and as supplemented herein. ANSI-C78.390 authorized suffix letters shall be supplemented with the letter “Q” (MIL-DTL-6363 QPL item). The letter “Q” shall be incorporated into the method of designation in accordance with the following example:

EXAMPLE

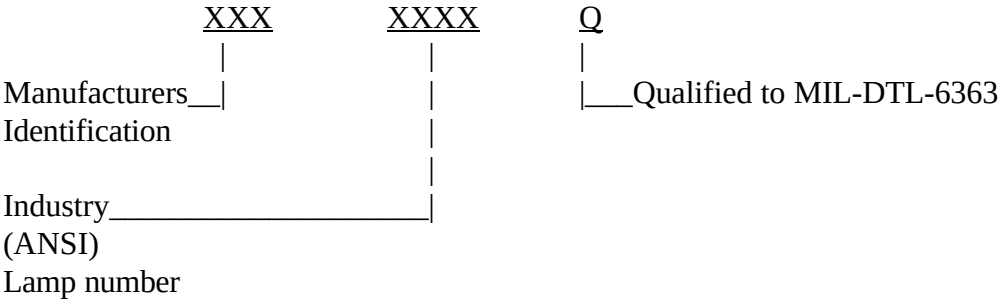



12. Interchangeability: These lamps may be similar to, but are not interchangeable with, other commercial or military lamps due to unique aircraft applications and qualification.

There are no technical changes in this revision.



Source: https://assist.dla.mil -- Downloaded: 2026-10-17T06:55Z
Check the source to verify that this is the current version before use.

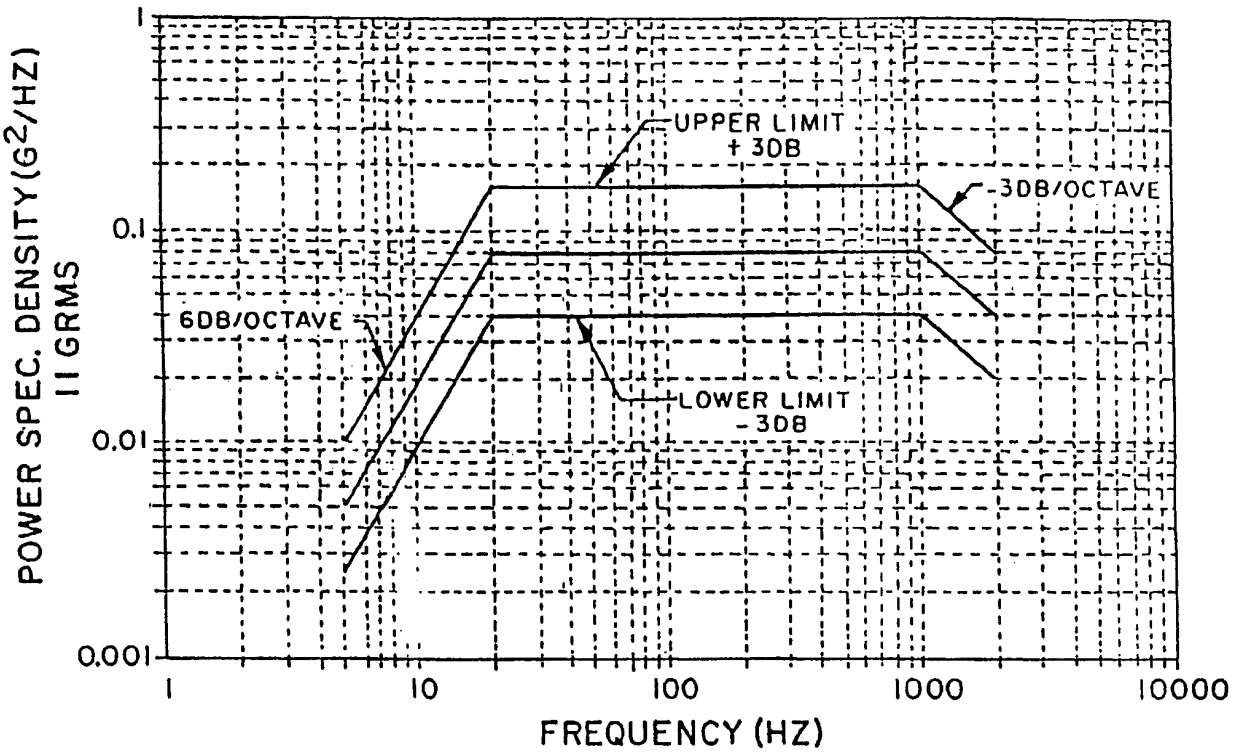


| Freq Hz | Vibration Level PSD ($G^2$/Hz) | Upper Limit (+3 DB) PSD ($G^2$/Hz) | Lower Limit (-3 DB) PSD ($G^2$/Hz) |
|---|---|---|---|
| 5 | 0.005 | 0.01 | 0.0025 |
| 10 | 0.02 | 0.04 | 0.01 |
| 20 | 0.08 | 0.16 | 0.04 |
| 1000 | 0.08 | 0.16 | 0.04 |
| 2000 | 0.04 | 0.08 | 0.02 |

FIGURE 2. Random vibration curve for T-1-1/4 lamps.

CONCLUDING MATERIAL



Source: https://assist.dla.mil -- Downloaded: 2026-10-17T06:55Z
Check the source to verify that this is the current version before use.

Custodians:
Army - AV
Navy - AS
Air Force - 99

Review activities:
Navy - MC, SH
Air Force - 11, 82
DLA - GS

Preparing activity
Navy - AS
(Project 6240-1441-07)



Source: https://assist.dla.mil -- Downloaded: 2026-10-17T06:55Z
Check the source to verify that this is the current version before use.