INCH-POUND

MIL-L-6363/8
25 September 1992

MILITARY SPECIFICATION SHEET

LAMPS, INCANDESCENT, AIRCRAFT SERVICE, SINGLE CONTACT MIDGET FLANGED BASE, T-1-3/4 BULB

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation: MIL-L-6363

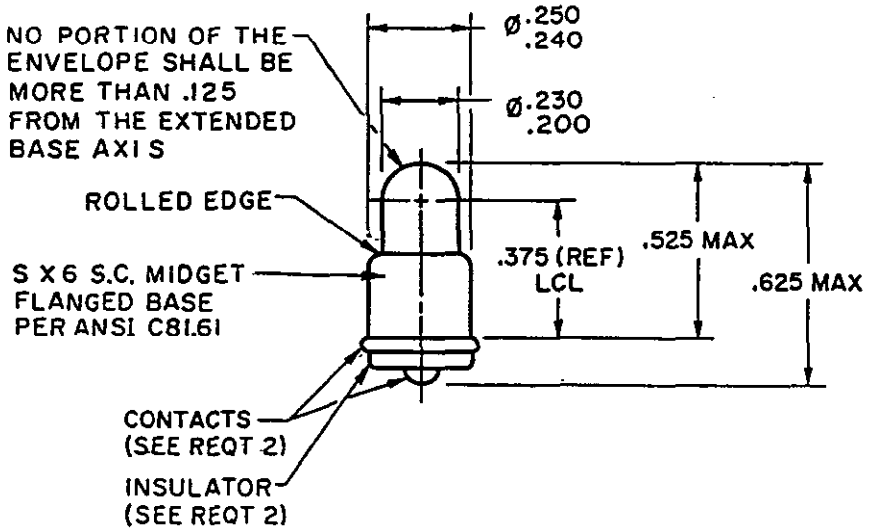


FIGURE 1. Configuration and dimensions.

REQUIREMENTS:

1. Configuration and dimensions: See figure 1.

2. Construction:

   a. Standard lamp construction shall include a side weld or solder bead and solder bead bottom contact.

   b. Where required for greater reliability and added resistance to corrosion and internal shorting, solderless construction is available as an option by the addition of a dash and suffix letter "S" to the part identification number in table I.

EXAMPLE

M6363/8-1-S

AMSC N/A FSC 6240

DISTRIBUTION STATEMENT A: Approved for public release, distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T06:56Z
Check the source to verify that this is the current version before use.

TABLE I. Part or identifying numbers (PIN) and operating characteristics.

Part Identifying No. (PIN) (SEE REOT 2)	Type Per MIL-L-6363	Bulb Finish	Shock Test Level (G's)	Electrical Ratings			Filament Style	MSCD 1/ 2/	Average Rated Lab Life at DC
				Volts (Nom)	Amperes (±10%)	Watts (Max)		Candelas	Hours
M6363/8-1		Clear		5.0	.06	.33	C-2R	.15 ±25%	2,000
M6363/8-1AS15		Clear		5.0	.06	.33	C-2R	.15 ±15%	2,000
M6363/8-2		Clear		6.0	.20	1.32	C-2R	.34 ±25%	2,000
M6363/8-2AS10		Clear		6.0	.20	1.32	C-2R	.34 ±10%	2,000
M6363/8-2R		Red		6.0	.20	1.32	C-2R	.34 ±25%	2,000
M6363/8-2B		Blue/White		6.0	.20	1.32	C-2R	.34 ±25%	2,000
M6363/8-3		Clear		6.3	.20	1.38	C-2F	.40 ±25%	10,000
M6363/8-3AS15		Clear		6.3	.20	1.38	C-2F	.40 ±15%	10,000
M6363/8-4		Clear		14	.10	1.54	C-2F	.40 ±25%	5,000
M6363/8-4AS15		Clear		14	.10	1.54	C-2F	.40 ±15%	5,000
M6363/8-5		Clear		28	.04	1.24	C-2F	.34 ±25%	1,500
M6363/8-5AS15	I	Clear	50	28	.04	1.24	C-2F	.34 ±15%	1,500
M6363/8-5R		Red		28	.04	1.24	C-2F	.34 ±25%	1,500
M6363/8-6AS15		Clear		28	.04	1.24	C-2F	.15 ±15%	5,000
M6363/8-7		Clear		28	.04	1.24	C-2F	.30 ±25%	2,000
M6363/8-7AS15		Clear		28	.04	1.24	C-2F	.30 ±15%	2,000
M6363/8-7R		Red		28	.04	1.24	C-2F	.30 ±25%	2,000

1/ MSCD for -2 and -2AS10 is when operated at 5 volts.

2/ MSCD for colored lamps applies to clear lamp before coating is applied.

When so specified, solderless construction shall include a side weld and nickel plated brass bottom contact.

c. Insulators shall be color coded as follows to identify voltage rating of lamps.

5.0 Volt - Green
6.0 Volt - Green
6.3 Volt - Green
14 Volt - Yellow
28 Volt - Red

3. Finish: Glass globe finish shall be as indicated in table I. Red lamps shall conform to MIL-C-25050 for instrument and panel lighting red. Blue/white lamps shall conform to MIL-C-25050 for blue filtered white color.

4. Lamp operating characteristics: When operated at rated voltage, the lamp operating characteristics shall be as specified in table I.

5. Where indicated by suffix "AS_ " in the part number, lamps shall be aged for a minimum of 10 hours at rated voltage and selected for 15% or 10% tolerance on MSCD as indicated in table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T06:56Z
Check the source to verify that this is the current version before use.

6. MSCD at 1000 hours shall not be less than 80% of initial MSCD when measured at rated voltage.

7. Coating adhesion: Applicable for exterior coated colored lamps.

8. High temperature: Applicable for qualification tests only (85°C/185°F).

9. Thermal shock: Applicable for qualification tests only - Use temperatures for Type I lamps.

10. Random vibration: Applicable for qualification tests only - See figure 2 for random vibration curve.

11. Shock: Applicable for qualification tests only - See table I for applicable "g" level.

12. Humidity: Applicable for qualification tests only.

13. Salt spray: Applicable for qualification tests only.

14. Marking: To be determined for marking of production lamps. Pending investigation of marking with military part number (or portion thereof) versus marking with lamp trade number (as is or modified). This requirement will not affect lamp qualification requirements.

15. Interchangeability: These lamps may be similar to, but are not interchangeable with, other commercial or military lamps due to unique aircraft applications and qualification.

NOTES:


1. Dimensions are in inches.

2. Intended use - aircraft indicator, instrument and panel light assemblies.

3. For design feature purposes, this specification sheet takes precedence over acquisition documents referenced herein.

4. Qualification by similarity - Lamp M6363/8-5AS15 (or optional M6363/8-7AS15) is required to be fully qualified in accordance with Table I of MIL-L-6363. All other "AS__" designated lamps may be qualified by similarity and extension of qualification from M6363/8-5AS15 (or optional -7AS15). The basic lamps (MSCD ±25%) will be granted qualification status based upon qualification approval of the "AS__" lamp. Red lamp M6363/8-5R (or optional -7R) may be qualified by similarity and extension of qualification from M6363/8-5AS15 (or optional -7AS15). All other red lamps will be granted qualification status based upon qualification approval of the-5R (or optional -7R). Refer to MIL-L-6363 for conditions and data requirements for extension of qualification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T06:56Z
Check the source to verify that this is the current version before use.

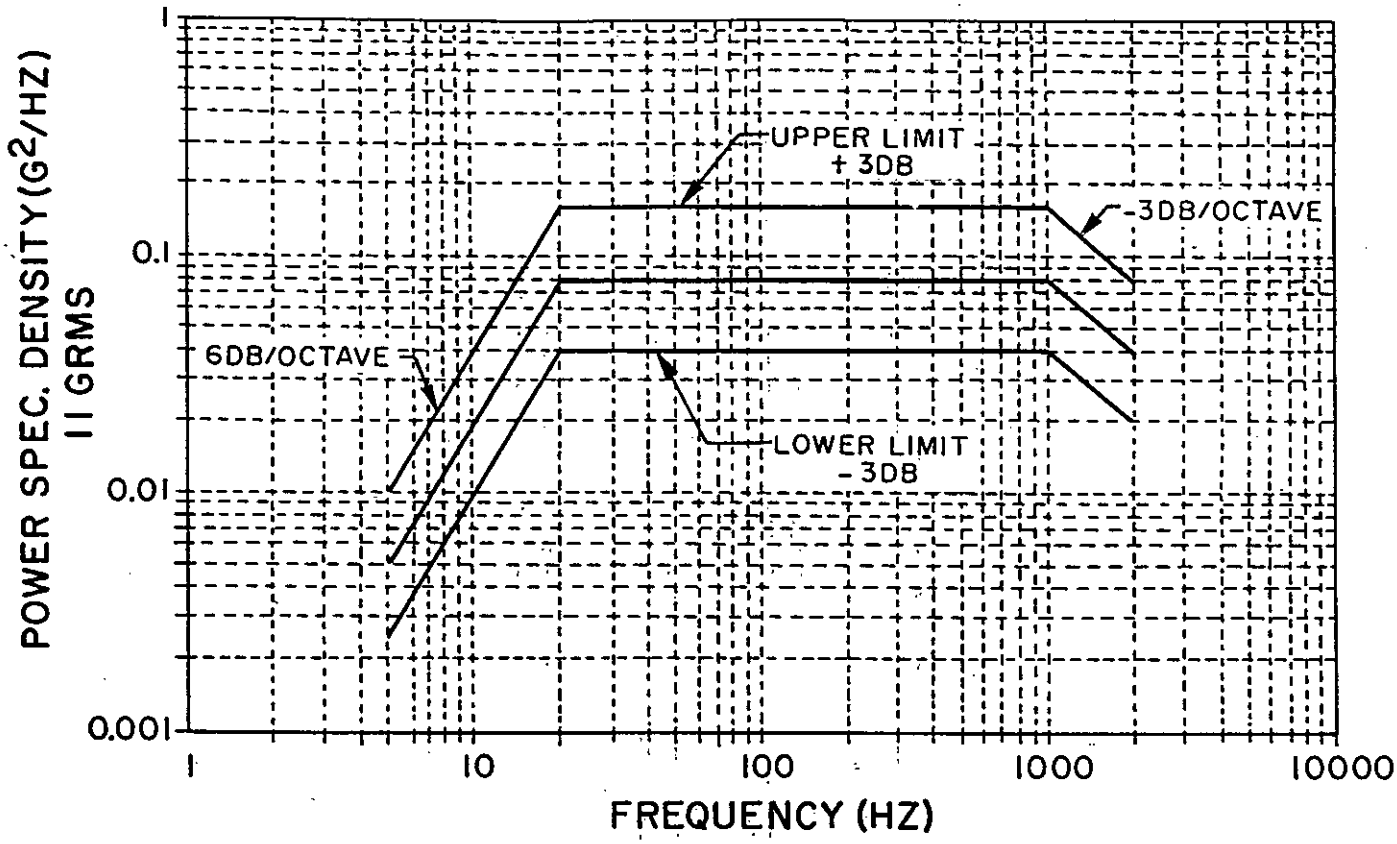

FREQ. HZ.	VIBRATION LEVEL PSD (G^2/HZ)	UPPER LIMIT (+3 DB) PSD (G^2/HZ)	LOWER LIMIT (-3 DB) PSD (G2/HZ)
5	0.005	0.01	0.0025
10	0.02	0.04	0.01
20	0.08	0.16	0.04
1000	0.08	0.16	0.04
2000	0.04	0.08	0.02

FIGURE 2. Random vibration curve for T-1 3/4 lamps.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T06:56Z
Check the source to verify that this is the current version before use.

Custodians:
Army - AV
Air Force - 99
Navy - AS

Review activities:
Army -
Air Force - 82, 11
Navy -MC, SH
DLA - GS

Preparing activity:
Navy -AS

(Project 6240-1009-08)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T06:56Z
Check the source to verify that this is the current version before use.