INCH-POUND

MIL-DTL-6363/9A
30 September 1997
SUPERSEDING
MIL-L-6363/9
13 September 1993

DETAIL SPECIFICATION SHEET

LAMPS, INCANDESCENT, AIRCRAFT SERVICE, SINGLE CONTACT MINIATURE BAYONET BASE, T-3-1/4 BULB

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification and MIL-DTL-6363.

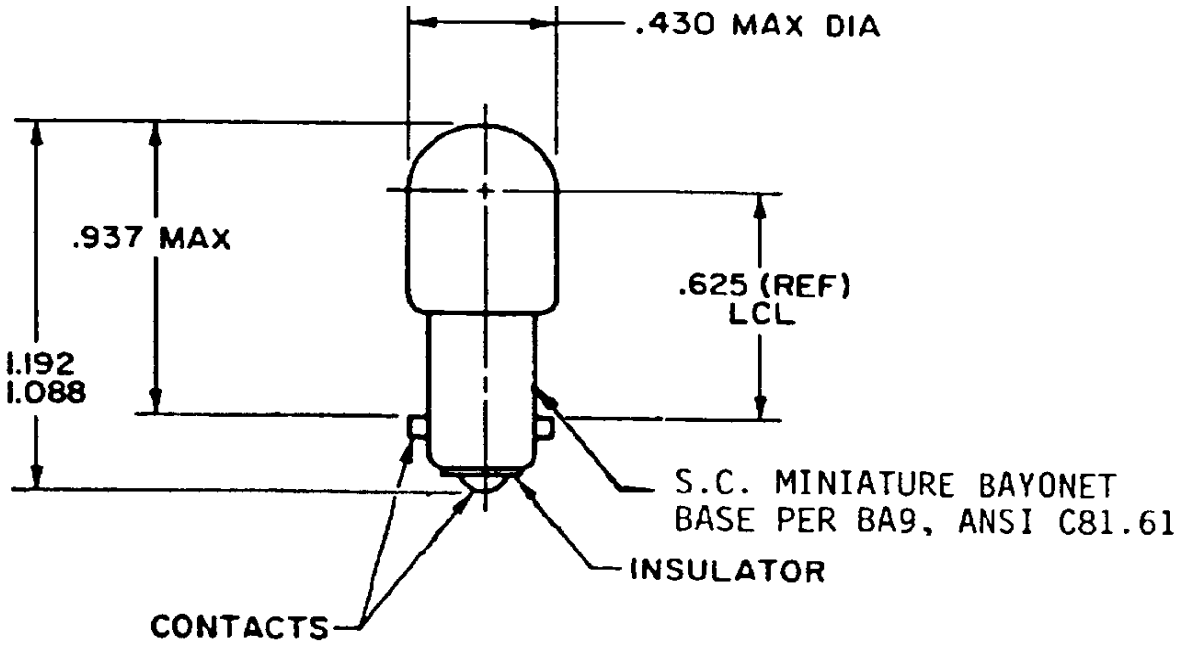


FIGURE 1. Configuration and dimensions.

See NOTES on the next page.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T06:56Z
Check the source to verify that this is the current version before use.

NOTES:
1. Dimensions are in inches
2. Intended use - aircraft instrument and press-to-test indicator light assemblies.
3. For design feature purposes, This specification takes precedence over procurement documents referenced herein.
4. Qualification by similarity - Lamp M6363/9-2 is required to be fully qualified in accordance with table I of MIL-DTL-6363. Lamp M6363/9-1 may be granted qualification by similarity in accordance with table II of MIL-DTL-6363. All other lamps may be qualified by similarity and extension of qualification from the qualified lamps with no further testing. Red lamp M6363/9-2R may be qualified by similarity in accordance with table II of MIL-DTL-6363. All other red lamps may be granted qualification from -2R lamp with no additional testing. Refer to MIL-DTD-6363 for conditions and data requirements for qualification.

REQUIREMENTS:

1. Configuration and dimensions: See figure 1. The envelope need not have the shape shown, but the envelope, including any coating thereon, shall be contained within the outline shown.

2. Finish: Glass globe finish shall be as indicated in table I. Red lamps shall conform to MIL-C-25050 for aviation red (no paler or yellower than NBS No. 3215 filter).

TABLE I. Part or identifying numbers (PIN) and operating characteristics.

Part or Identifying Number (PIN) 1/	Type MIL-DTL-6363	Bulb Finish	Shock Test Level (G's)	Electrical Ratings			Filament Style	MSCD ±25% 2/	Average Rated Lab Life at DC
				Volts (Nom)	Amperes (±10%)	Watts (Max)		Candelas	Hours
M6363/9-1	I	Clear	50	6.0	0.70	4.6	C-2R	3.5	500
M6363/9-1R		Red	50	6.0	0.70	4.6	C-2R	3.5	
M6363/9-2		Clear	90	28.0	0.17	5.2	C-2F	3.34	
M6363/9-2R		Red	90		0.17	5.2	C-2F	0.4	
M6363/9-3		Clear	50		0.04	1.2	C-2F	0.34	1,000
M6363/9-3R		Red			0.04	1.2	C-2F	0.34	
M636.3/9-4		Clear			0.07	2.1	C-2F	1.1	

1/ M6363/9-2 also has exterior lighting application.

2/ MSCD for colored lamps applies to clear lamp before coating is applied.

3. Lamp operating characteristics: When operated at rated voltage, the lamp operating characteristics shall be as specified in table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T06:56Z
Check the source to verify that this is the current version before use.

4. Coating adhesion: Applicable for exterior coated colored lamps.

5. High temperature: Applicable for qualification tests only (85°C/185F°).

6. Thermal shock: Applicable for qualification tests only. Use temperatures for Type I lamps.

7. Random vibration: Applicable for qualification tests only. See figure 2 for random vibration curve.


8. Shock: Applicable for qualification tests only. See table I for applicable “g” level.

9. Humidity: Applicable for qualification tests only.

10. Salt spray: Applicable for qualification tests only.

11. Marking: Production lamps qualified to MIL-DTL-6363 and listed on QPL-6363 shall be marked in accordance with ANSI-C78.390 and as supplemented herein. ANSI-C78.390 authorized suffix letters shall be supplemented with the letter “Q” (MIL-DTL-6363 QPL item). The letter “Q” shall be incorporated into the method of designation in accordance with the following example:


EXAMPLE

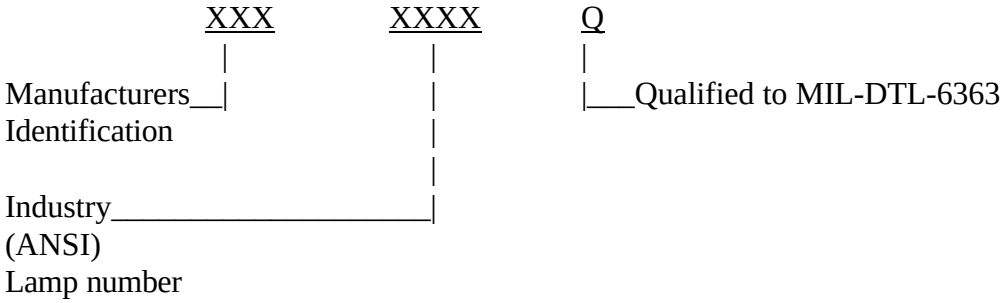

12. Interchangeability: These lamps may be similar to, but are not interchangeable with, other commercial or military lamps due to unique aircraft applications and qualification.

There are no technical changes in this revision.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T06:56Z
Check the source to verify that this is the current version before use.

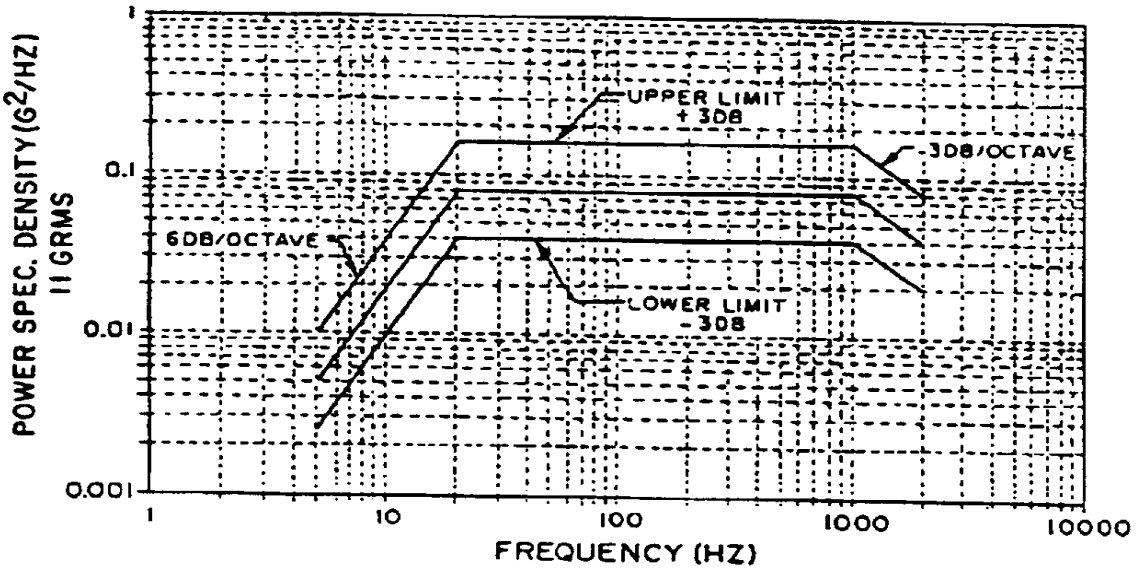

Freq Hz	Vibration Level PSD (G^2/Hz)	Upper Limit (+3 DB) PSD (G^2/Hz)	Lower Limit (-3 DB) PSD (G^2/Hz)
5	0.005	0.01	0.0025
10	0.02	0.04	0.01
20	0.08	0.16	0.04
1000	0.08	0.16	0.04
2000	0.04	0.08	0.02

FIGURE 2A. Random vibration curve for T-3-1/4 lamps.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T06:56Z
Check the source to verify that this is the current version before use.

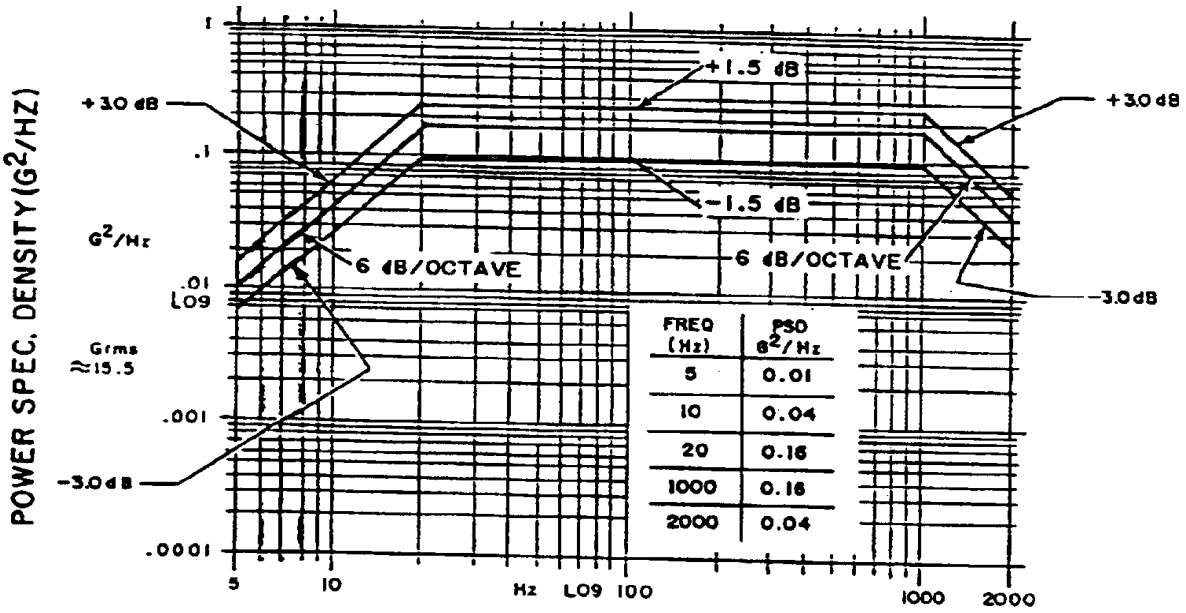


FIGURE 2B. Random vibration curve for M6363/9-2 lamp.

CONCLUDING MATERIAL

Custodians:
Army - AV
Navy - AS
Air Force - 99

Review activities:
Navy - MC, SH
Air Force - 11, 82
DLA - GS

Preparing activity
Navy - AS
(Project 6240-1441-09)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T06:56Z
Check the source to verify that this is the current version before use.