MIL-T-6368 (USAF)
14 November 1950
Superseding
No. 21156-A
12 December 1947

MILITARY SPECIFICATION

TRANSMITTER, FUEL FLOW, TOTALIZING, TYPE H-1A

1. SCOPE

1.1 This specification covers one type of totalizing fuel flow transmitter, designated Type H-1A, to be used for indicating, remotely, the total fuel consumed by an aircraft turbo-jet, and is for use on the high pressure side of the engine fuel pump.

2. APPLICABLE SPECIFICATIONS, OTHER PUBLICATIONS, AND DRAWINGS

2.1 The following specifications, bulletin, and drawings, of the issue in effect on the date of invitation for bids, shall form a part of this specification to the extent specified herein:

2.1.1 Specifications:

Military:

MIL-C-5015	Connectors; Electrical
MIL-D-5028	Drawings and Data Lists; Preparation of (For Engines, Accessories and Other Auxiliary Equipment)
MIL-E-5272	Environmental Testing, Aeronautical and Associated Equipment, (General Specification For)
MIL-F-5572	Fuel; Aircraft Reciprocating Engine
MIL-F-5616	Fuel; Aircraft Engine, Grade JP-1
MIL-F-5624	Fuel; Aircraft Turbine and Jet Engine, Grade JP-3
MIL-P-5633	Packaging and Packing Of Aircraft Material In Steel Shipping Containers

Air Force-Navy Aeronautical:

AN-QQ-A-696	Anodic-Films; Corrosion-Protective (For) Aluminum Alloys
AN-M-13	Marking, Labeling, and Tagging; Aircraft Aeronautical Equipment, Accessories, Parts, Materials and Supplies
AN-S-126	Screw-Threads; Standard Aircraft

U. S. Air Force:

32466	Design of Electrical Equipment in Aircraft, General Specification for

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T06:57Z
Check the source to verify that this is the current version before use.

2.1.2 Specification Bulletin:

Air Force-Navy Aeronautical:

143 Specifications and Standards; Use of

2.1.3 Drawings:

Air Force-Navy Aeronautical:

AND10050	Bosses - Standard Dimensions for Gasket Seal Straight Thread
AND10066	Receptacles - Electrical Connector, Integral Mounting

(Copies of this specification, Military, Air Force-Navy Aeronautical, and U. S. Air Force specifications, bulletins, and drawings may be obtained upon application to the Commanding General, Air Materiel Command, Wright-Patterson Air Force Base, Dayton, Ohio. Both the title and identifying number or symbol should be stipulated when requesting copies.)

3. REQUIREMENTS

3.1 Material:

3.1.1 Specifications and standards.- Specifications and standards for all materials, parts, and Government certification and approval of processes and equipment, which are not specifically designated herein and which are necessary for the execution of this specification, shall be selected in accordance with Bulletin No. 143, except as provided in the following paragraph:

3.1.1.1 Standard parts.- AN or MIL Standard parts shall be used wherever they are suitable for the purpose and shall be identified by their part numbers. Commercial utility parts such as screws, bolts, nuts, cotter pins, et cetera may be used, provided they have suitable properties and are replaceable by the AN or MIL Standard parts without alteration, and provided the corresponding AN or MIL part numbers are referenced on the drawings and in the parts lists. In applications for which no suitable corresponding AN or MIL part is in effect on date of invitation for bids, commercial parts may be used provided they conform to the requirements of this specification.

3.1.2 Protective treatment.- When materials are used in the construction of the transmitter that are subject to deterioration when exposed to climatic and environmental conditions likely to occur during service usage, they shall be protected against such deterioration in a manner that will in no way prevent compliance with the performance requirements of this specification. The use of any protective coating that will crack, chip, or scale with age or extremes of climatic and environmental conditions shall be avoided.

3.1.3 Nonferrous materials.- Nonferrous materials shall be used for all parts of the transmitter, except where ferrous materials are essential.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T06:57Z
Check the source to verify that this is the current version before use.

3.2 Design and construction.- The transmitter shall conform to Figure 1. Unless otherwise specified, the transmitter shall be designed to transmit from a remote station, the fuel consumed or remaining in gallons of aviation kerosene in accordance with Specification MIL-F-5616 and aviation gasoline in accordance with Specifications MIL-F-5572 and MIL-F-5624. The type of fuel for initial calibration shall be as specified by the Procuring Agency. The transmitter shall be of the positive displacement type. The transmitter shall be constructed so that no parts will work loose in service. It shall be built to withstand the strains, jars, vibrations and other conditions incident to shipping, storage, installation, and storage.

3.2.1 Case.- The case of the transmitter shall be designed to be rain tight and dust tight. The transmitter case shall be constructed of aluminum, aluminum alloy, bronze, or steel, wherever it is suitable for the purpose.

3.2.2 Magnetic switch.- The transmitter shall incorporate a hermetically sealed magnetically operated switch. The switch shall operate once for each gallon of fuel consumed, thus closing the circuit through the indicator.

3.2.3 Pressure.- The transmitter shall withstand a maximum working pressure of 1200 psi without distortion of any part sufficient to produce errors in indication. The transmitter shall withstand a pressure of 1500 psi without bursting or taking a permanent set.

3.2.4 Flow direction.- The direction of flow through the transmitter shall be permanently and legibly marked by stamped or case lettering, "In" and "Out".

3.2.5 Caps.- The fuel line connections shall be furnished with suitable caps or plugs to prevent foreign material entering the transmitter.


3.2.6 Adjustments.- The transmitter unit shall be provided with means to adjust or correct the indications, if this becomes necessary during the life of the transmitter. This means of adjustment shall be reasonably simple to manipulate and of such a nature that adjustment can be accomplished with tools ordinarily possessed by a depot instrument repairman. This adjustment may consist of changing gears.


3.2.7 Fuel line connections.- Each fuel line connection shall be in accordance with Drawing AND10050 for 1 inch outside diameter tubing.

3.3 Interchangeability.- All parts having the same manufacturer's part number shall be directly and completely interchangeable with each other with respect to installation and performance. Changes in manufacturer's part numbers shall be governed by the drawing number requirements of Specification MIL-D-5028.

3.4 Wiring.- The transmitter shall be wired in accordance with the diagram shown on Figure 2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T06:57Z
Check the source to verify that this is the current version before use.

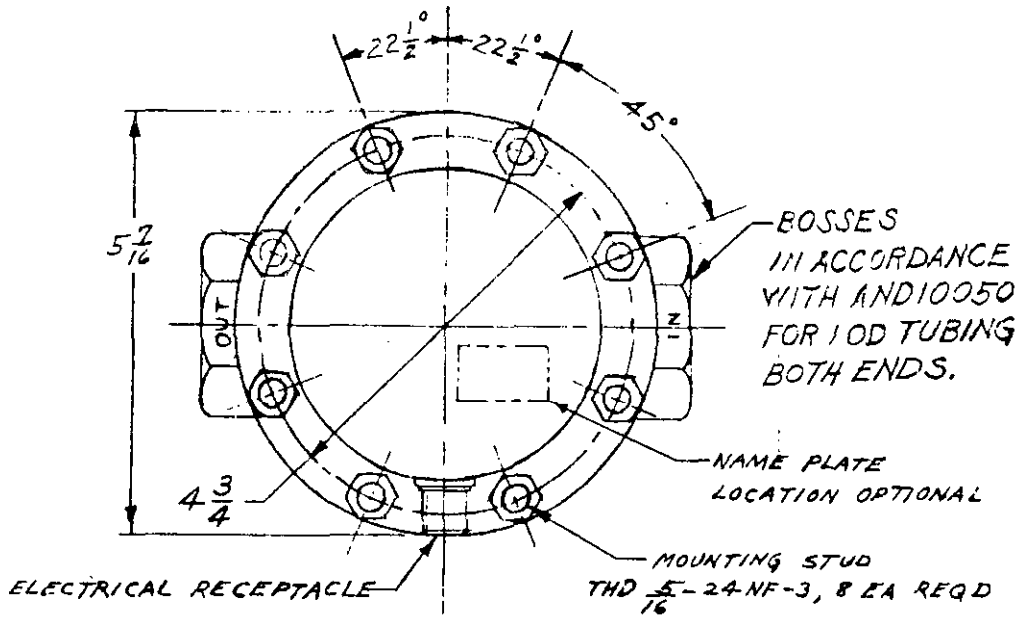

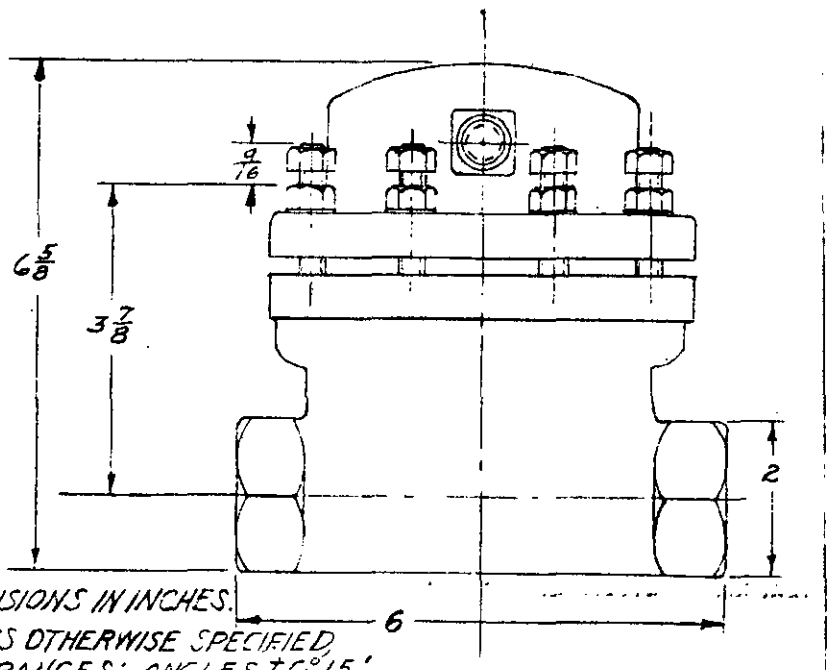

DIMENSIONS IN INCHES.
UNLESS OTHERWISE SPECIFIED, TOLERANCES: ANGLES ±0°15'
FRACTIONS ± 1/16

FIGURE 1. TRANSMITTER OUTLINE

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T06:57Z
Check the source to verify that this is the current version before use.

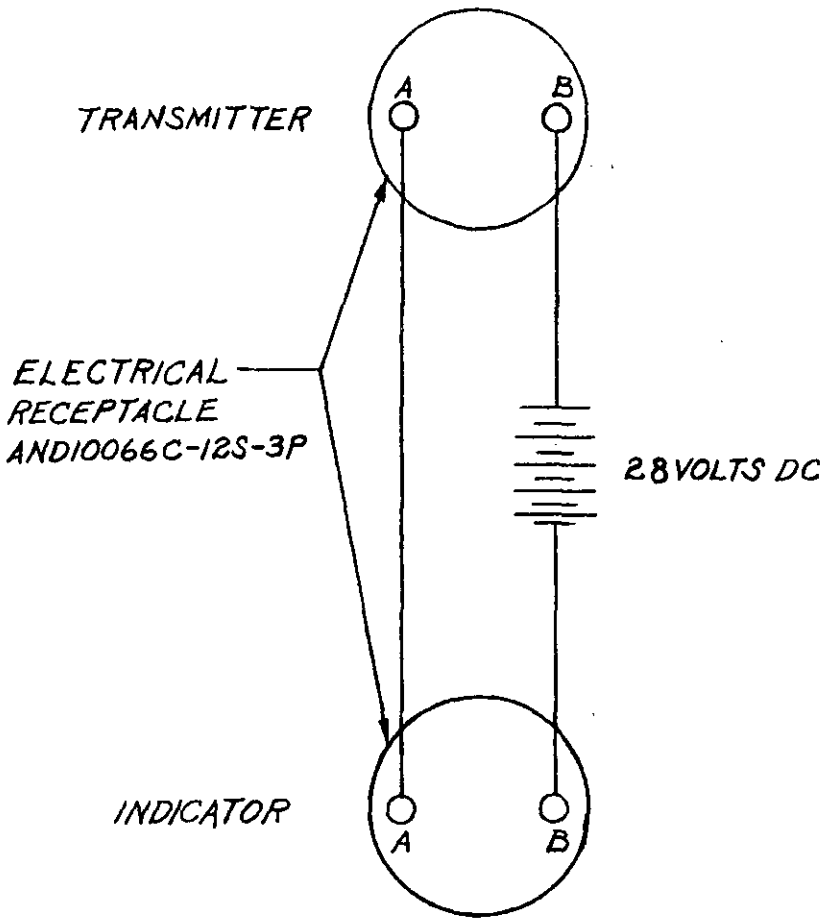


FIGURE 2. WIRING DIAGRAM

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T06:57Z
Check the source to verify that this is the current version before use.

3.5 Weight.- The weight of the transmitter shall not exceed 8.5 pounds.

3.6 Electrical receptacle.- The transmitter shall be provided with a pressurized electrical receptacle in accordance with AND10066A-12S-3P and Specification MIL-C-5015.

3.7 Mounting studs.- The length of the transmitter mounting stud from the lock nut to the end shall be a minimum of 9/16 inch.

3.8 Lock wire.- All transmitter body screws and nuts shall be safetied with brass lock wire. The lock wire shall be twisted tight between each pair of screws or nuts.

3.9 Radio noise filter.- A suitable filter shall be placed across the magnetic switch to reduce the radio noise.

3.10 Screw threads.- Unless otherwise specified, the threads of all machine screws 0.060 inch or larger in diameter shall conform to Specification AN-S-126.

3.11 Finishes and protective coatings.

3.11.1 Aluminum alloy parts.- Aluminum alloy parts shall be covered with an anodic film conforming to Specification AN-QQ-A-696. Electrical receptacles and small screws need not be anodized, but shall be suitably protected from the environmental conditions specified herein.

3.11.2 Iron and steel parts.- Iron and steel parts shall be suitably protected to meet the Humidity tests specified herein.

3.11.3 Brass parts.- Brass parts shall be finished as specified for iron and steel parts.

3.11.4 Mildew proofing.- The electrical components shall be sprayed with a fungicide which will protect these components against the environmental conditions specified in Section 4.

3.12 Nameplate.- A nameplate, permanently and legibly filled in with the following information, shall be securely attached to the transmitter case:

Transmitter, Fuel Flow, Totalizing
Type H-1A
Range 0-1500 GPH
24V D.C.
Specification MIL-T-6368
Mfr's. Part No._____
Mfr's. Serial No._____
Order No._____
Stock No._____
(Mfr's. Name or Trademark)
U.S. Property

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T06:57Z
Check the source to verify that this is the current version before use.

3.12.1 Manufacturer's part number.- The manufacturer's part number marked in the space provided on the nameplate shall be in accordance with Specification AN-M-13.

3.12.2 Manufacturer's serial number.- The manufacturer's serial number shall be entered in the space provided on the nameplate. The serial number shall not be repeated and shall be a concise identifying number.

3.12.3 Order number.- Where both the purchase order number, such as "AF 33(038) 50-4710" and the contract number, such as "AF 33(038)-1565", are given on an order or contract, the number placed on the nameplate in the place designated "Order Number" shall be the number corresponding to the Air Force's purchase order number for example: "50-4710". In the absence of the Air Force's purchase order number, and the contract number is given, the letters "AF" and the last digits of the contract number shall be placed on the nameplate, for example: "AF-1565".

3.12.4 Stock number.- The stock number entered in the space provided on the nameplate shall be as specified by the Procuring Agency. The stock number shall include the name or standard abbreviations of the name of the service having jurisdiction of the equipment.

3.13 Wiring diagram.- A wiring diagram showing external wiring between indicator, transmitter, and power source of a type acceptable to the Procuring Agency shall be painted or baked on the transmitter case. Decalcomanias may be used if protected with a suitable laquer.

3.14 Warning instructions.- With each transmitter 1 printed or reproduced copy of the following warning instructions shall be included in a prominent manner: "USE 1-5/16-12N-3 STRAIGHT THREAD FUEL LINE FITTINGS ONLY TO CONNECT TRANSMITTER. DO NOT USE PIPE THREAD FITTINGS."

3.15 Envelope.- An envelope, containing the warning instructions shall be securely attached to each transmitter. The following information shall be printed on the face of the envelope:

"IMPORTANT
THIS ENVELOPE CONTAINS WARNING
INSTRUCTIONS, MOUNTING NUTS."

3.16 Workmanship:

3.16.1 General.- The transmitter, including all parts and accessories, shall be fabricated and finished in a thoroughly workmanlike manner. Particular attention shall be given to freedom from blemishes, defects, burrs, and sharp edges, accuracy of dimensions, radii of fillets, marking of parts and assemblies, thoroughness of soldering, welding, brazing, painting, wiring and riveting, alignment of parts and tightness of assembly screws, bolts, et cetera.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T06:57Z
Check the source to verify that this is the current version before use.

3.16.2 Cleaning.- The transmitter shall be thoroughly cleaned, and loose, spattered, or excess solder, metal chips, and other foreign material removed during and after final assembly.

4. SAMPLING, INSPECTION, AND TEST PROCEDURES

4.1 Classification of tests.- The inspection and testing of transmitters shall be as classified as follows:

4.1.1 Qualification tests.- Qualification tests are those tests accomplished on samples submitted for qualification as a satisfactory product.

4.1.2 Inspection tests.- Inspection tests are those tests accomplished on transmitters submitted for acceptance under contract.

4.2 Test conditions:

4.2.1 Standard atmospheric conditions.- Whenever the pressure and temperature existing at the time of the test are not specified definitely, it is understood that the test shall be made at atmospheric pressure (approximately 29.92 inches Hg) and at room temperature (approximately +25°C). When tests are made with atmospheric pressure or room temperature differing materially from these values, proper allowance shall be made for the difference from the specified condition. Except where otherwise specified, the transmitter shall be tapped or vibrated before a test reading is taken.

4.2.2 Vibration stand.- Whenever a vibration stand is specified, it shall vibrate at any desired frequency between 500 and 300 cpm and shall subject the transmitter to vibration such that a point on the transmitter case will move in a straight line with a total excursion of not less than 0.030 inch nor more than 0.040 inch, and with sinusoidal velocity. This movement shall be along any axis (x, y, or z) of a cartesian coordinate system. One axis shall be parallel to the vertical centerline of the transmitter in its normal position.

4.2.3 Position.- Unless otherwise specified, the transmitter shall be tested with the common plane of the mounting studs horizontal, and with the electrical receptacle at the top.

4.2.4 Test voltage.- The transmitters shall be tested with an applied voltage of 28V dc.

4.2.5 Test fuel.- All transmitter tests, except the Vibration test and the Substitute fuel test shall be conducted using the type of fuel specified or approved by the Procuring Agency.

4.2.6 The transmitters shall be tested with an electrical solenoid counter operated by the switch in the transmitter. Sufficient fuel shall be used in testing in order that the number of gallons for each rate of flow shall not be less than the value specified in Table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T06:57Z
Check the source to verify that this is the current version before use.

TABLE I

Fuel Flowmeter Transmitter

True Flow Rate		Indicated Fuel Consumed Gallons	Tolerance - Percent of Gallons Fuel Consumed Plus or Minus	
Gals/Hr	Lbs/Hr (Approx.)		Room Temp.	High Temp. Low Temp. and Substitute Fuel
100	700	1	1.0	2.0
400	2700	10	1.0	2.0
1200	8200	10	1.0	2.0
1500	10500	10	1.0	2.0

4.2.7 Test pressure.- Unless otherwise specified, all transmitter tests shall be conducted with a line fuel pressure between 10 psi and 50 psi.

4.3 Qualification test:

4.3.1 Prior qualification.- Unless otherwise specified by the Procuring Agency, transmitters which have not previously passed a qualification test, or which have passed the qualification test and have been modified in any manner, shall satisfactorily pass a qualification test prior to the acceptance of any transmitter.

4.3.2 Qualification test samples.- Qualification test samples shall consist of 2 transmitters. Samples shall be appropriately identified with the manufacturer's own part number and any additional identification required by the authorizing letter.

4.3.3 The qualification test shall consist of all the tests specified herein.

4.4 Inspection tests:

4.4.1 Unless otherwise specified, contractor's records of all inspection work and tests, giving the results of tests required to determine compliance with the requirements and tests specified herein, shall be kept complete and shall be available to the Government representative at all times. The record or report of inspection and tests shall be signed or approved by a responsible person specifically assigned by the contractor. Contractors not having laboratory testing facilities satisfactory to the Government shall engage the services of a commercial testing laboratory capable of conducting tests to determine compliance with all the requirements and tests in the specification, and acceptable to the Government.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T06:57Z
Check the source to verify that this is the current version before use.

4.4.2 Individual tests.- Each transmitter shall be subjected to the following tests. In addition, each transmitter shall be subjected to any other test specified herein which the Inspector considers necessary to determine compliance with the requirements of this specification.

4.4.2.1 Scale error.- The transmitter shall be tested for scale errors at the points shown in Table I. The scale errors shall not exceed the tolerances specified in Table I.

4.4.2.2 Pressure drop.- The transmitter shall be tested for pressure drop at the rates of flow specified in Table II. The pressure drop of the transmitter shall not exceed the values specified in column covering "Pressure Drop" of Table II.

TABLE II

Flow Rate		Pressure Drop	Blocked Mechanism Pressure Drop
Gals/Hr	Lbs/Hr (Approx.)	Pounds per Square Inch	Pounds per Square Inch
400	2700	1.0	18.0
1200	8200	7.0	22.0

4.4.2.3 By-pass valve.- The metering mechanism shall be blocked by any suitable means and the pressure drop across the transmitter shall be measured with the fuel flowing at the rates specified in Table II. The pressure drop values shall not exceed the tolerances specified in column covering "Blocked Mechanism" of Table II. The by-pass valve shall not vibrate or chatter, but shall open and close positively.

4.4.2.4 Leak.- The transmitter shall be tested for leaks by applying a hydraulic pressure of 1200 psi to the inlet connection with the outlet connection plugged or capped. This test shall first be performed at room temperature and no leaks shall be evident over a period of 5 minutes. The temperature of the transmitter shall then be reduced to -54 ±2°C by submersion in a cold bath already at this temperature, for a period of not less than 15 minutes. While still at this temperature, the 1200 psi hydraulic pressure shall be rapidly applied 5 times. After each application of pressure, there shall be no evidence of leaks.

4.4.2.5 Dielectric strength.- The transmitter shall be tested for dielectric strength as specified in the paragraph covering "Dielectric Strength" of Specification No. 32466.

4.4.3 Sampling tests.- Four transmitters shall be selected at random from each lot of 500 or fraction thereof on the order and subjected to the following tests.

4.4.3.1 Lot.- A lot shall consist of transmitters manufactured under essentially the same conditions and submitted for inspection at substantially the same time.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T06:57Z
Check the source to verify that this is the current version before use.

4.4.3.2 When tests are specified on a quantity of transmitters that are selected as representative of a certain lot, and one or more of this number fails to meet the specified tests 2 additional transmitters of the lot represented shall be tested immediately to determine the extent of failure. If one or more transmitters of the additional samples fail to meet the specified tests, the entire lot shall be rejected. Individual performance tests need not be interrupted, unless the defect is of such a nature that it will seriously affect the performance or safe use of the transmitter.

4.4.3.3 Three transmitters representing the manufacturer's contract or order shall be subjected, to the special tests specified herein. The special tests shall be conducted as follows and in the order specified:

4.4.3.3.1 Test - Group I.- One of the transmitters shall be subjected to the following tests:

Substitute fuel
Extreme low temperature exposure
Extreme high temperature exposure
Humidity

4.4.3.3.2 Test - Group II.- The second transmitter shall be subjected to the following test:

Mildew

4.4.3.3.3 Test - Group III.- The third transmitter shall be subjected to the following tests:

Radio interference
Salt spray
Burst pressure

4.4.3.4 Visual examination of product.- The transmitter shall be examined to determine its conformance with Section 3 herein, unless such requirements are covered by a test under Section 4.

4.4.3.5 Position error.- The Scale error test shall be repeated while the transmitter is in a position rotated 45 and 90 degrees from the normal. The scale errors shall not exceed 2.0 percent of the indicated gallons consumed.

4.4.3.6 Vibration.- The transmitter shall be subjected to vibration for a total period of 15 hours on a suitably designed vibration stand. It shall be vibrated for 5 hours in each of 3 directions as specified in paragraph covering "Vibration stand". The first hour in each direction shall be at 1000 cpm, the second hour 1500 cpm, the third 2000, the fourth 2500, and fifth 3000 cpm. The transmitter shall be filled with fuel and capped during this test. Following the vibration period, the transmitter shall be tested for scale errors as specified for the transmitter in the Individual tests. The scale errors shall not exceed the tolerances specified in Table I for the Room temperature scale error test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T06:57Z
Check the source to verify that this is the current version before use.

4.4.4.4 Special tests:

4.4.4.4.1 Substitute fuel.- The transmitter shall be subjected to the Scale error test, except for the 1500 gph test point. The fuel used shall be in accordance with Specification MIL-F-5572. The scale error shall not exceed the tolerances specified in Table I for the Substitute fuel test.

4.4.4.4.2 Extreme low temperature exposure.- The transmitter shall be placed in a chamber and maintained at a temperature of -65 ±2°C for a period of 48 hours. The cold exposure shall then be continued at -54 ±2°C for an additional period of 24 hours. At the end of the 24-hour period and while the transmitter is still at a temperature of -54 ±2°C the Scale error test as specified in the Low temperature test shall be conducted. The scale errors observed shall not exceed the tolerances specified in Table I. Following the Extreme low temperature exposure test, and after all parts of the transmitter have attained room temperature for at least 1 hour, the transmitter shall be subjected to the Scale error test. The scale error shall not exceed the tolerances specified in Table I. The transmitter shall be inspected for deterioration or damage due to extreme temperature exposure.

4.4.4.4.3 Extreme high temperature exposure.- The transmitter shall be placed in a chamber and maintained at +71 ±2°C for a period of 15 hours. Following this period and while the transmitter is still at +71 ±2°C a Leak test shall be conducted by rapidly applying an hydraulic pressure of 1200 psi 5 times. After each application of pressure, there shall be no evidence of leaks over a period of 5 minutes. Following this period and while the transmitter and the fuel are at a temperature of +55 ±2°C the transmitter shall be subjected to the Scale error test as specified in the High temperature test. The scale errors shall not exceed the tolerances specified in Table I. After the transmitter has attained room temperature for at least 1 hour, the Room temperature scale error test shall be conducted. The scale error shall not exceed the tolerance specified in Table I. The transmitter shall be inspected for deterioration or damage due to extreme temperature exposure.

4.4.4.4.4 Humidity.- The transmitter shall be mounted in the normal operating position and subjected to the following Humidity cycling test. At the completion of the test, the transmitter shall not show signs of corrosion of metal parts or any other damage.

4.4.4.4.4.1 Humidity cycling.- The transmitter shall be placed in a chamber and maintained at a temperature of +65 ±2°C and a relative humidity of 95 percent for a period of 6 hours. The heat shall then be shut off and the transmitter shall then be cooled for 18 hours in this atmosphere in which the humidity shall be allowed to reach 100 percent as the temperature is reduced. (Precautions shall be taken to prevent dripping on the transmitter.) The transmitter shall be subjected to 5 of these humidity cycles. The Scale error test at room temperature shall be conducted at the completion of the cycles. The same tolerances shall apply. All transmitters, subjected to this test, shall be reworked regardless of damage to make them equal to new transmitters.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T06:57Z
Check the source to verify that this is the current version before use.

4.4.4.5 Mildew resistance.- The transmitter shall be subjected to Mildew resistance tests Procedure I of Specification MIL-E-5272. After this test the transmitter shall be subjected to the Room temperature scale error test. The same tolerances shall apply. There shall be no deterioration as a result of this test which adversely affect subsequent operation.

4.4.4.6 Salt spray.- The transmitter shall be subjected to Salt spray tests Procedure I of Specification MIL-E-5272 for a period of 50 hours. No damage to the transmitter shall result from this test.

4.4.4.7 Burst pressure.- A pressure of 1500 psi shall be applied to the inlet connection with the outlet connection plugged or capped. The transmitter shall withstand this pressure without failure.

4.5 All parts, specimens, or assemblies destroyed in making tests required by this specification and/or drawings, to determine compliance with the specification and/or drawings, shall be in addition to the quantity specified in the contract or purchase order and shall be furnished without increasing the cost of the contract or order.

5. PREPARATION FOR DELIVERY

5.1 General.- The packaging, packing, and marking requirements specified herein apply only to direct purchases by, or direct shipments to the Government.

5.2 Packaging and packing.- Each transmitter shall be packaged and packed for shipment in accordance with Specification MIL-P-5633.

5.3 Marking.- Marking shall be as specified in Specification MIL-P-5633. In addition, each container shall be marked with the following information:

Transmitter, Fuel Flow, Totalizing, 0-1500 GPH
Type H-1A
24V D.C.
Specification MIL-T-6368
Mfr's. Part No._____
Mfr's. Serial No._____
Order No._____
Stock No._____
Date of Manufacture_____
Quantity_____
(Mfr's. Name or Trademark)
Name of Contractor (if not the same as manufacturer)

IF IN STORAGE AFTER (DATE) (1), THE TRANSMITTER SHALL BE TESTED AND INSPECTED BEFORE ISSUE.

(1) This date shall be 18 months from the date of inspection and shall be inserted by the Inspector at the time of acceptance.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T06:57Z
Check the source to verify that this is the current version before use.

5.3.1 Precautionary marking.- The following precautionary marking shall be included on the exterior shipping container:

FRAGILE
DELICATE INSTRUMENTS
HANDLE WITH CARE

6. NOTES

6.1 Ordering data.- Procurement documents should specify the title, number, and date of this specification.

6.2 Qualification tests.- In the procurement of products requiring qualification, the right is reserved to reject bids on products that have not been subjected to the required tests and found satisfactory for inclusion on a Qualified Products List. The attention of suppliers is called to this requirement, and manufacturers are urged to communicate with the Air Materiel Command and arrange to have the products that they propose to offer to the Air Force tested for qualification in order that they may be eligible to be awarded contracts or orders for the products covered by this specification. Information pertaining to qualification of products may be obtained from the Commanding General, Air Materiel Command, Wright-Patterson Air Force Base, Dayton, Ohio, attention: MCREXE.

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data, is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

JJH/pab
MCREXE

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T06:57Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 119-R004

INSTRUCTIONS

This sheet is to be filled out by personnel either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity *(as indicated on reverse hereof)*.

SPECIFICATION

ORGANIZATION *(Of submitter)* | CITY AND STATE

CONTRACT NO. | QUANTITY OF ITEMS PROCURED | DOLLAR AMOUNT
$

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES.

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. *IS THE SPECIFICATION RESTRICTIVE?*

☐ YES ☐ NO IF "YES", IN WHAT WAY?

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity)* | DATE

DD FORM 1 APR 63 1426 REPLACES NAVSHIPS FORM 4863, WHICH IS OBSOLETE PLATE NO. 15419

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T06:57Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY

POSTAGE AND FEES PAID
NAVY DEPARTMENT

OFFICIAL BUSINESS

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T06:57Z
Check the source to verify that this is the current version before use.