
MIL-S-24251/3A
1 July 1968
SUPERSEDING
MIL-S-24251/3
30 March 1967

MILITARY SPECIFICATION SHEET

SHIELD, ELECTRON TUBE, HEAT DISSIPATING, 7 AND 9 PIN, MINIATURE (SPLIT SHELL)

The complete requirements for procuring the shield described herein shall consist of this document and the latest issue of Specification MIL-S-24251.

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

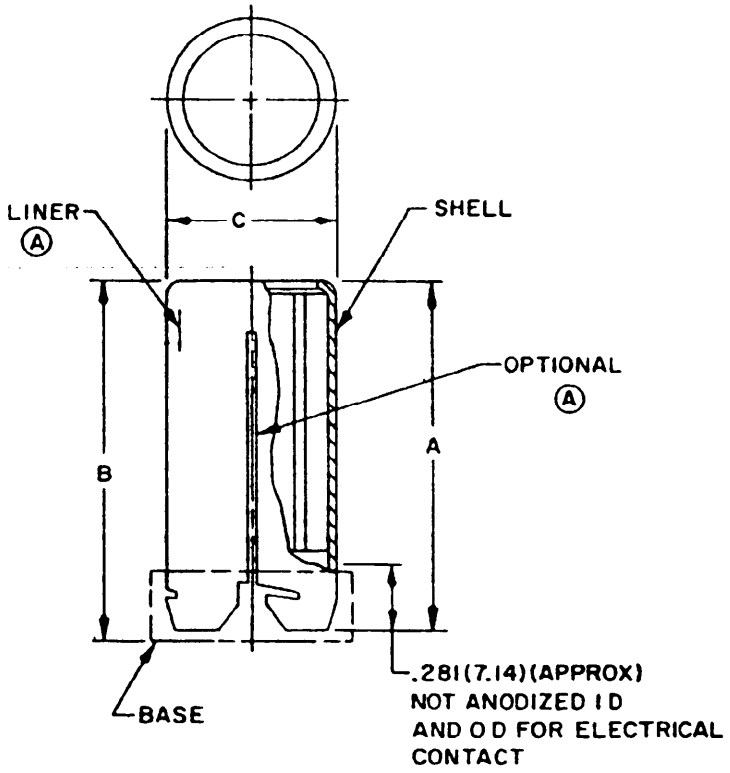

Ⓐ denotes changes

FSC 5960

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:42Z
Check the source to verify that this is the current version before use.

Characteristics.

Dash no.	Heat dissipation temp. reduction in °C (minimum)	A ±.06 (1.48)	B Max.	C ±.015 (.38)	Weight grams max 2/	Tube envelope		Retainer (base) ref	Tube socket ref
						Style	Length nom.		
1	40	1.343 (34.11)	1.593 (40.46)	0.875 (22.23)	11.0	T-5 1/2	1.125 (28.58)	M24251/4-1	MIL-S-12883/10
2	70	1.843 (46.81)	2.093 (53.16)	.875 (22.23)	15.0	T-5 1/2	1.500 (38.10)	M24251/4-1	MIL-S-12883/10
3	75	2.343 (59.51)	2.593 (65.86)	.875) (22.23)	19.	T-5 1/2	2.000 (50.80)	M24251/4-1	MIL-S-12883/10
4	35	1.343 (34.11)	1.593 (40.46)	1.000 (25.40)	12.	T-6 1/2	1.125 (28.45)	M24251/4-2	MIL-S-12883/11
5	85	1.843 (46.81)	2.093 (53.16)	1.000 (25.40)	16.0	T-6 1/2	1.562 (39.62)	M24251/4-2	MIL-S-12883/11
6	75	2.343 (59.51)	2.593 (65.86)	1.000 (25.40)	20.0	T-6 1/2	2.000 (50.80)	M24251/4-2	MIL-S-12883/11
7 1/	75	2.562 (65.07)	2.812 (71.42)	1.000 (25.40)	20.0	T-6 1/2	2.437 (61.90)	M24251/4-2	MIL-S-12883/11

1/ This shield is for use with noval tubes which are longer than usual tubes for example, tube type 6094.

2/ Weight of shield assembly less base.

NOTES:

1. All dimensions are in inches.
2. Millimeters are in parentheses.
3. Metric equivalents (to the nearest .01 mm) are given for general information only and are based on 1 inch = 25.4 mm.
4. Unless otherwise specified, tolerance is 2 places ±.010 (.25 mm); 3 places ±.005 (.13 mm).

Source: https://assist.dla.mil -- Downloaded: 2026/10-19T20:42Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

The shield, locking mechanism, liner, and other parts shall be designed to meet the requirements of MIL-S-24251, and to fit the tube envelope, tube socket and retainer (base) specified in table.

Dimensions and configuration: See figure and table.

Material:

Liner-Beryllium copper, QQ-C-533.
Shell-Aluminum alloy WW-T-700/6 or QQ-A-250/2.

Finish:


(A) Liner-Black cadmium plate, QQ-P-416, class 3, type II, optional finish: Henderlube or equal.
(A) Shell-Black anodize - type II per MIL-A-8625, or black matte per MIL-C-5541, optional finish: Henderlube or equal.

Installation force shall not exceed 20 pounds.

Engaging torque: 20 pound-inches maximum.

The part number consists of the basic number of this specification sheet, preceded by the letter "M", and a dash number taken from table.

Example:



Custodians:
Army - EL
Navy - EC
Air Force - 11

Review activities:
Army - EL
Navy -
Air Force - 11, 17, 85
DSA - ES

User activities:
Army - MU
Navy - MC, CG
Air Force - 19

Preparing activity:
Navy - EC

(Project 5960-2313-4)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:42Z
Check the source to verify that this is the current version before use.