INCH-POUND

MIL-DTL-24251/3C
15 February 2008
SUPERSEDING
MIL-DTL-24251/3B
14 May 2003

DETAIL SPECIFICATION SHEET

SHIELD, ELECTRON TUBE, HEAT DISSIPATING 7 AND 9 PIN, MINIATURE (SPLIT SHELL)

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-24251.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

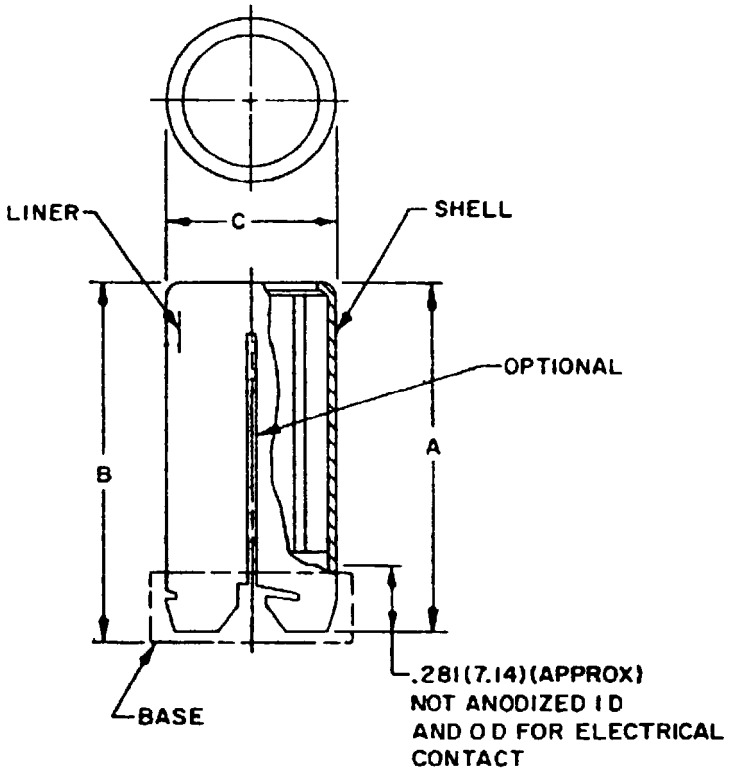

NOTES:
1. All dimensions are in inches.
2. Millimeters are in parentheses.
3. Metric equivalents (to the nearest 0.01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
4. Unless otherwise specified, tolerance is 2 places ± .010 (0.25 mm); 3 places ± .005 (0.13 mm).

FIGURE 1. Dimensions and configuration.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:42Z
Check the source to verify that this is the current version before use.

TABLE 1. Characteristics.

Dash no.	Heat dissipation temp. reduction in °C (minimum)	A ±.06 (1.48)	B Max	C ±.015 (0.38)	Weight grams max 2/	Tube envelope		Retainer (base) ref	Tube socket ref
						Style	Length nom.		
1	40	1.343 (34.11)	1.593 (40.46)	.875 (22.23)	11.0	T-5 1/2	1.125 (28.58)	M24251/4-1	MIL-PRF-12883/10
2	70	1.843 (46.81)	2.093 (53.16)	.875 (22.23)	15.0	T-5 1/2	1.500 (38.10)	M24251/4-1	MIL-PRF-12883/10
3	75	2.343 (59.51)	2.593 (65.86)	.875 (22.23)	19.0	T-5 1/2	2.000 (50.80)	M24251/4-1	MIL-PRF-12883/10
4	35	1.343 (34.11)	1.593 (40.46)	1.000 (25.40)	12.0	T-6 1/2	1.125 (28.45)	M24251/4-2	MIL-PRF-12883/11
5	85	1.843 (46.81)	2.093 (53.16)	1.000 (25.40)	16.0	T-6 1/2	1.562 (39.62)	M24251/4-2	MIL-PRF-12883/11
6	75	2.343 (59.51)	2.593 (65.86)	1.000 (25.40)	20.0	T-6 1/2	2.000 (50.80)	M24251/4-2	MIL-PRF-12883/11
7 1/	75	2.562 (65.07)	2.812 (71.42)	1.000 (25.40)	20.0	T-6 1/2	2.437 (61.90)	M24251/4-2	MIL-PRF-12883/11

1/ This shield is for use with noval tubes which are longer than usual tubes, for example, tube type 6094.

2/ Weight of shield assembly less base.

REQUIREMENTS:

The shield, locking mechanism, liner, and other parts shall be designed to meet the requirements in MIL-DTL-24251, and to fit the tube envelope, tube socket, and retainer (base) specified in table I.

Dimensions and configuration: See figure 1 and table I.

Material:

Liner: Beryllium copper, ASTM-B194.
Shell: Aluminum alloy, SAE-AMS-QQ-A-250, SAE-AMS-QQ-A-250/2, and ASTM-B209.

Finish:

Liner: Black cadmium plate, SAE-AMS-QQ-P-416, class 3, type II, optional finish: Henderlube or equal.
Shell: Black anodize - type II in accordance with MIL-A-8625, or black matte in accordance with MIL-DTL-5541, optional finish: Henderlube or equal.

Installation force shall not exceed 20 pounds.

Engaging torque: 20 inch-pounds maximum.

The Part or Identifying Number (PIN) consists of the basic number of this specification sheet, preceded by the letter "M", and a dash number taken from table I.

Example:



Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:42Z
Check the source to verify that this is the current version before use.

Referenced Documents: In addition to MIL-DTL-24251, this document references the following:
- MIL-DTL-5541
- MIL-A-8625
- MIL-DTL-12883/10
- MIL-DTL-12883/11
- ASTM-B194
- ASTM-B209
- SAE-AMS-QQ-A-250
- SAE-AMS-QQ-A-250/2
- SAE-AMS-QQ-P-416

Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
- Army - CR
- Navy - EC
- Air Force - 11
- DLA - CC

Preparing activity:
- DLA - CC

(Project 5960-2008-007)

Review activities:
- Army - MI
- Navy - CG, MC
- Air Force - 19

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:42Z
Check the source to verify that this is the current version before use.