INCH-POUND


MIL-R-24243/10C
17 DECEMBER 1990
SUPERSEDING
MIL-R-24243/10B
21 September 1987

MILITARY SPECIFICATION SHEET

RIVETS, BLIND, NONSTRUCTURAL, RETAINED MANDREL, OPEN-END, DOMED HEAD, ALUMINUM ALLOY

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-R-24243

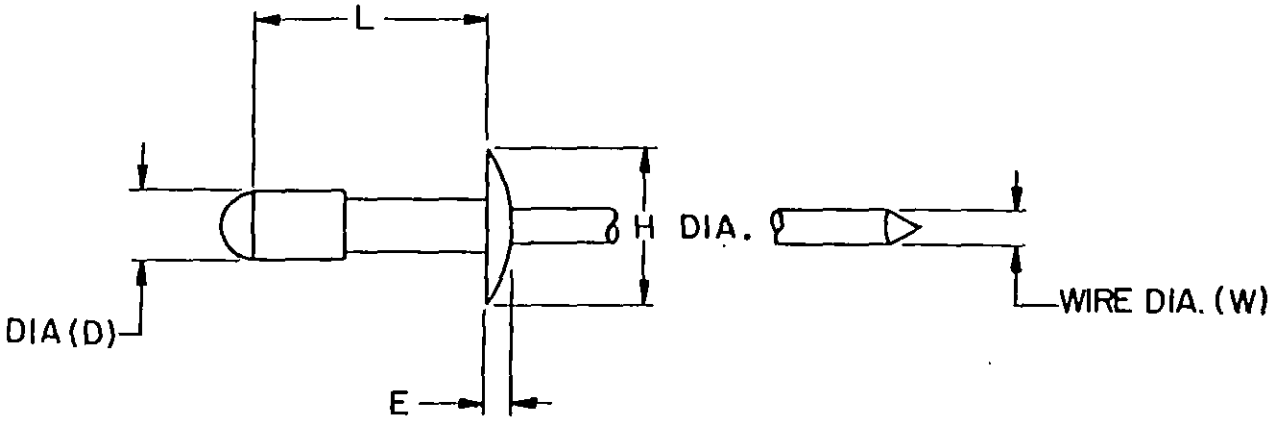

NOTES:
1. All dimensions are in inches.

FIGURE 1. RIVETS

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:39Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Material. Blind rivets shall be furnished in the following material combinations and dimensions.

TABLE I. MATERIAL COMBINATIONS

COMBINATION	BODY	MANDREL
A	5052 Aluminum Alloy (UNS A95052)	C1016 - C1025 Steel (UNS G10160-G10250)

TABLE II. BASIC DIMENSIONS

NOM DIA	BASIC DIMENSIONS					
	D	H	E	R MAX	W NOM	RECOMMENDED HOLE SIZE
1/8	.128 .124	.262 .243	.041 .034	.020	.074	.129-.133
5/32	.160 .155	.321 .302	.051 .044	.020	.090	.161-.165
3/16	.190 .185	.396 .377	.061 .054	.030	.112	.192-.196

2. Part Number. The part number shall consist of the letter "M", the basic number of this specification sheet, followed by a material combination code, followed by a nominal body diameter size code, in thirty-seconds of an inch, followed by a maximum grip taken from Table III.

Example: M24243/10A412

- Grip
- Nominal diameter in 1/32 inch increments
- Material
- Specification sheet number

M24243/10A412 Indicates - Rivet, blind, nonstructural, retained mandrel, open-end, domed head, 5052 (UNS A95052) aluminum alloy body, C1012-C1025 (UNS G10120-G10250) or C1045-C1075 (UNS G10450-G10750) mandrel; nominal body diameter size, .125; grip range, .031-.187.

3. Revision letters are not used to denote changes due to the extensiveness of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:39Z
Check the source to verify that this is the current version before use.

TABLE III. DASH NUMBERS AND DIMENSIONS

NOM DIA	MATL COMB A	L	RECOM GRIP RANGE
1/8	A410	.410 .350	.031-.187
	A412	.470 .420	.062-.250
	A414	.520 .480	.125-.312
	A416	.590 .540	.187-.375
5/32	A512	.480 .430	.046-.250
	A514	.540 .490	.125-.312
	A516	.610 .550	.156-.375
3/16	A613	.550 .470	.062-.250
	A615	.610 .520	.125-.312
	A619	.730 .660	.187-.437
	A621	.780 .720	.250-.500
	A631	1.090 1.030	.500-.781

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:39Z
Check the source to verify that this is the current version before use.

Custodians:

Army - AR
Navy - AS
Air Force - 99

Review Activity:

Army - AV, MI
Air Force - 11, 82

User Activity:
National Security Agency - NS

Preparing Activity:

Navy - AS

Agent:

DLA - IS

Project 5320-0766

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:39Z
Check the source to verify that this is the current version before use.