
INCH-POUND
MIL-R-24243/1E
22 June 1994
SUPERSEDING
MIL-R-24243/1D
21 September 1987

MILITARY SPECIFICATION SHEET

RIVETS, BLIND, NONSTRUCTURAL, RETAINED MANDREL, OPEN END, DOMED HEAD, ALUMINUM ALLOY, CARBON STEEL, CORROSION RESISTANT STEEL

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the retained mandrel, nonstructural, blind rivets described herein shall consist of this specification and the latest issue of MIL-R-24243.

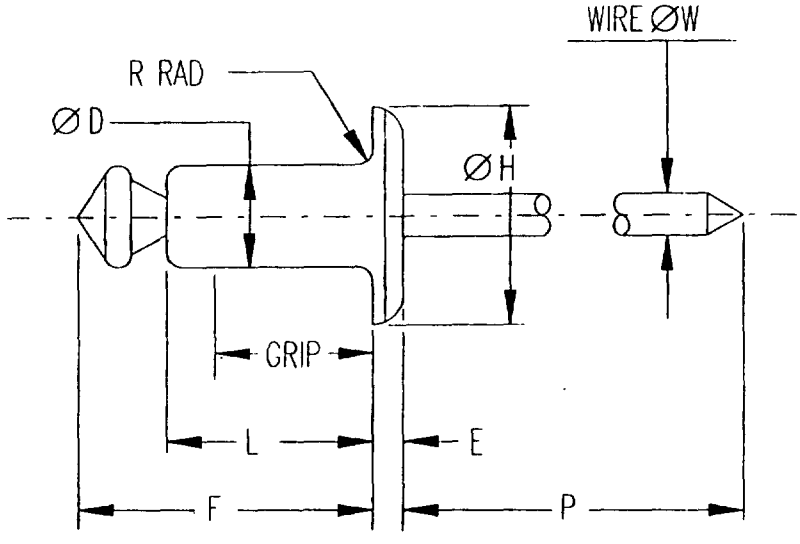

NOTES:
1. All dimensions are in inches.

FIGURE 1. RIVETS

REQUIREMENTS:

1. Material. Blind rivets shall be furnished in the following material combinations and dimensions.

AMSC N/A

FSC 5320

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:37Z
Check the source to verify that this is the current version before use.

TABLE I. MATERIAL COMBINATION SYMBOLS

SYMBOL	COMBINATION	
	BODY	MANDREL
A	5056 Aluminum Alloy (UNS A95056)	1006-1038 Steel (UNS G10060-G10380)
B	5052 Aluminum Alloy (UNS A95052)	2024 Aluminum Alloy (UNS A92024)
D	1006-1010 Steel (UNS G10060-G10100)	1030-1060 Steel (UNS G10300-G10600)
F	302-HQ-CRES (UNS S30430) 302 CRES (UNS S30200) 305 CRES (UNS S30500)	305-431 CRES (UNS S30500-S43100)
G	302-HQ-CRES (UNS S30430) 302 CRES (UNS S30200) 305 CRES (UNS S30500)	1030-1060 Steel (UNS G10300-G10600)


TABLE II. BASIC DIMENSIONS

NOM DIA	BASIC DIMENSIONS							RECOMMENDED HOLE SIZE
	ØD	H	E	R MAX	W NOM	F MAX	P MIN	
.094	.096 .090	.198 .178	.032 .022	.015	.057	L MAX +.100	1.00	.097-.100
.125	.128 .122	.262 .238	.040 .030	.020	.076	L MAX +.120	1.00	.129-.133
.156	.159 .153	.328 .296	.050 .037	.020	.095	L MAX +.140	1.00	.160-.164
.188	.191 .183	.394 .356	.060 .045	.025 1/	.114	L MAX +.160	1.00	.192-.196
.250	.255 .246	.525 .475	.080 .065	.030 2/	.151	L MAX +.180	1.00	.257-.261

1/ For material combinations F and G, R Max shall be .035.
2/ For material combinations F and G, R Max shall be .060.

2. Part Number. The part number shall consist of the letter "M", the basic number of this specification sheet, followed by a dash number consisting of a material combination symbol, a nominal body diameter size code in thirty-seconds of an inch, and a maximum grip code in sixteenths of an inch taken from Table III.

EXAMPLE: M24243/1 B 4 02

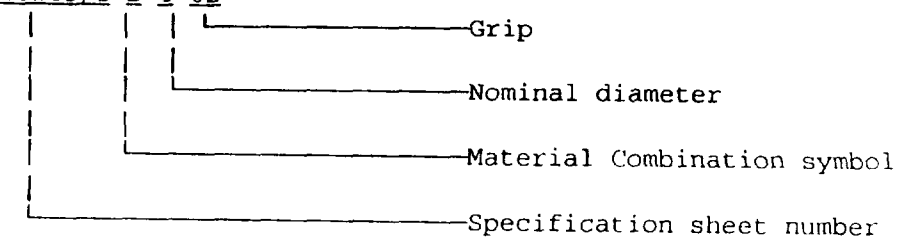

M24243/1B402 Indicates - Rivet, blind, nonstructural, retained mandrel, open-end, domed head, 5052 (UNS A95052) aluminum body, 2024 (UNS A92024) aluminum mandrel; nominal body diameter size, .125; grip range, .063-.125.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:37Z
Check the source to verify that this is the current version before use.

3. Changes from previous issues. Asterisks are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

TABLE III. DASH NUMBERS AND DIMENSIONS

DASH NUMBER					L	RECOMMENDED GRIP RANGE
A302 A304	B302 B304 B306	D302 D304	F302 F304	G302 G304	.228-.250 .340-.375 .470-.500	.020-.125 .126-.250 .251-.375
A401 A402 A403 A404 A405	B401 B402 B403 B404 B405	D401 D402 D403 D404 D405	 F402 F403 F404 	 G402 G403 G404 	.182-.212 .245-.275 .307-.337 .370-.400 .432-.462	.020-.062 .063-.125 .126-.187 .188-.250 .251-.312
A406	B406	D406	F406	G406	.495-.525	.313-.375
A408	B408	D408	F408	G408	.620-.650	.376-.500
A502 A503 A504 A506	B502 B503 B504 B506	D502 D503 D504 D506	F502 F503 F504 F506	G502 G503 G504 G506	.270-.300 .332-.362 .395-.425 .530-.550	.020-.125 .126-.187 .188-.250 .251-.375
A508	B508	D508	F508	G508	.645-.675	.376-.500
A602 A604 A606	B602 B604 B606	D602 D604 D606	F602 F604 F606	G602 G604 G606	.295-.325 .420-.450 .545-.575	.020-.125 .188-.250 .251-.375
A608 A610	B608 B610	D608 D610	F608 F610	G608 G610	.670-.700 .795-.825	.376-.500 .501-.625
A612	B612	D612	F612	G612	.920-.950	.626-.750
A616	B616				1.170-1.200	.876-1.000
A804 A806 A808	B804 B806 B808	D804 D806 D808	F804 F806 F808	G804 G806 G808	.470-.500 .595-.625 .720-.750	.126-.250 .251-.375 .376-.500
A810	B810		F810	G810	.845-.875	.501-.625
A812	B812	D812	F812	G812	.970-1.00	.626-.750
		D816			1.220-1.250	.876-1.000

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:37Z
Check the source to verify that this is the current version before use.

Custodians:
Army - AR
Navy - AS
Air Force - 99

Review Activities:
Army - AV, MI
Air Force - 82
National Security Agency - NS

Preparing Activity:
DLA-IS

(Project 5320-0809-01)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:37Z
Check the source to verify that this is the current version before use.