
MIL-R-24243/2B
21 September 1987
SUPERSEDING
MIL-R-24243/2A(SHIPS)
24 March 1969

MILITARY SPECIFICATION SHEET

RIVETS, BLIND, NONSTRUCTURAL, RETAINED MANDREL, OPEN-END, DOMED HEAD, NICKEL-COPPER ALLOY

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the retained mandrel, nonstructural, blind rivets described herein shall consist of this specification and the latest issue of MIL-R-24243.

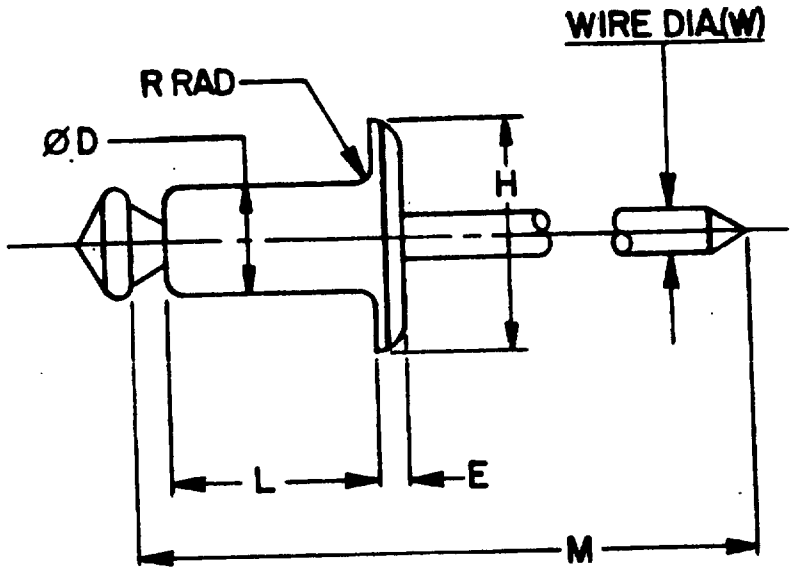

NOTES:
1. All dimensions are in inches.

FIGURE 1. RIVETS

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:37Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Material. Blind rivets shall be furnished in the following material combinations and dimensions.

TABLE I. MATERIAL COMBINATIONS


COMBINATION	BODY	MANDREL
E	Nickel-Copper Alloy (UNS N04400)	C1030 - C1060 Steel (UNS G10300-G10600)

TABLE II. BASIC DIMENSIONS

NOM DIA	BASIC DIMENSIONS					RECOMMENDED HOLE SIZE
	ØD	H	E	R MAX	W NOM	
.125	.128 .124	.262 .238	.040 .030	.020	.076	.129-.133
.156	.159 .155	.328 .296	.047 .037	.020	.095	.160-.164
.188	.190 .186	.394 .356	.055 .045	.025	.114	.192-.196
.250	.253 .249	.525 .465	.075 .065	.030	.151	.257-.261

2. Part Number. The part number shall consist of the letter "M", the basic number of this specification sheet, followed by a material combination code, followed by a nominal body diameter size code in thirty-seconds of an inch, followed by a maximum grip code in sixteenths of an inch taken from Table III.

EXAMPLE: M24243/2E402

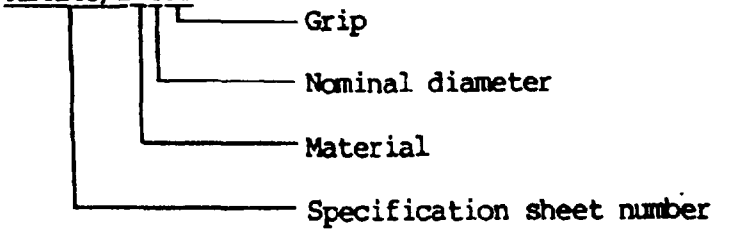

M24243/2E402 Indicates - Rivet, blind, nonstructural, retained mandrel, open-end, domed head, nickel-copper (UNS N04400) alloy body, C1030-C1060 (UNS G10300-G10600) steel mandrel; nominal body diameter size, .125; grip range, .063-.125.

3. Revision letters are not used to denote changes due to the extensiveness of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:37Z
Check the source to verify that this is the current version before use.

TABLE III. DASH NUMBERS AND DIMENSIONS

MATL COMB E	L	M NOM	RECOM GRIP RANGE
E401	.173-.203	1.438	.040-.062
E402	.235-.265		.063-.125
E403	.298-.328	1.563	.126-.187
E404	.360-.390		.188-.250
E502	.260-.290	1.563	.063-.125
E503	.323-.353	1.688	.126-.187
E504	.385-.415		.188-.250
E602	.285-.315	1.688	.063-.125
E604	.410-.440	1.875	.126-.250
E606	.535-.565	2.063	.251-.375
E608	.660-.690		.376-.500
E804	.460-.490	2.250	.125-.250
E808	.710-.740	2.250	.376-.500

Custodians:
Army - AR
Navy - AS
Air Force -99

Review Activities:
Army - AV, MI
Air Force - 11, 82

User Activities:
National Security Agency - AS

Preparing Activity:
Navy - AS

Agent:
DLA - IS

(Project 5320-0608-2)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:37Z
Check the source to verify that this is the current version before use.