
MIL-R-24243/5C
21 September 1987
SUPERSEDING
MIL-R-24243/5B(SHIPS)
24 March 1969

MILITARY SPECIFICATION SHEET

RIVETS, BLIND, NONSTRUCTURAL, RETAINED MANDREL, OPEN-END, 120° COUNTERSUNK HEAD, ALUMINUM ALLOY, CARBON STEEL, NICKEL-COPPER ALLOY

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the retained mandrel, nonstructural, blind rivets described herein shall consist of this specification and the latest issue of MIL-R-24243.

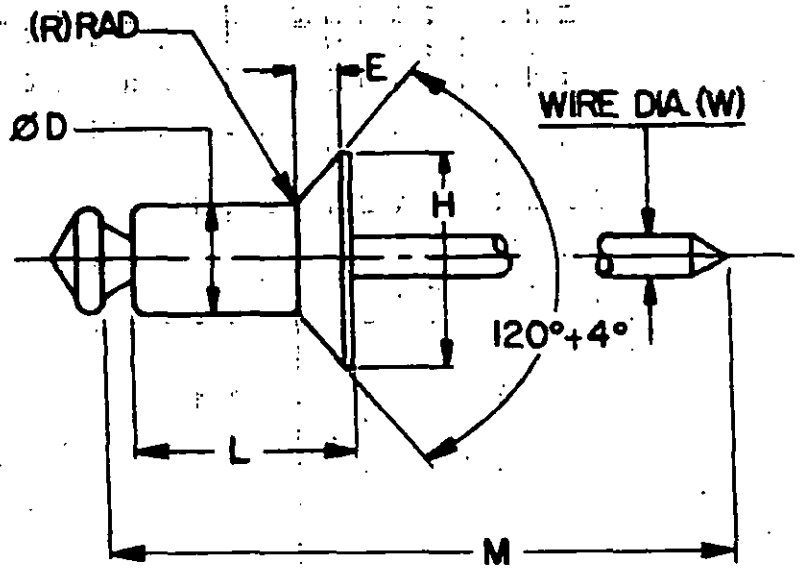

NOTES:
1. All dimensions are in inches.

FIGURE 1. RIVETS

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:38Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Material. Blind rivets shall be furnished in the following material combinations and dimensions.

TABLE I. MATERIAL COMBINATIONS

COMBINATION	BODY	MANDREL
A	5056 Aluminum Alloy (UNS A95056)	C1006 - C1025 Steel (UNS G10060-G10250)
B	5052 Aluminum Alloy (UNS A95052)	7178 Alminum Alloy (UNS A97178)
D	C1006 - C1010 Steel (UNS G10060-G10100)	C1030 - C1060 Steel (UNS G10300-G10600)
E	Nickel-Copper Alloy (UNS N04400)	C1030 - C1060 Steel (UNS G10300-G10600)


TABLE II. BASIC DIMENSIONS

NOM DIA	BASIC DIMENSIONS					RECOMMENDED HOLE SIZE
	ØD	H	E REF	R MAX	W NOM	
.094	.096 .090	.187 .161	.027	.020	.057	.097-.100
.125	.128 .124	.233 .207	.031	.025	.076	.129-.133
.156	.159 .155	.294 .268	.040	.030	.095	.160-.164
.188	.190	.361	.050	.035	.114	.192-.196

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:38Z
Check the source to verify that this is the current version before use.

2. Part Number. The part number shal consist of the letter "M", the basic number of this specification sheet, followed by a material combination code, followed by a nominal body diameter size code in thirty-seconds of an inch followed by a maximum grip code in sixteenths of an inch taken from Table III.

EXAMPLE: M24243/5A503

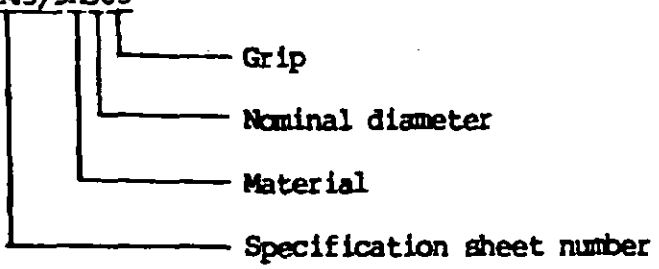

M24243/5A503 Indicates - Rivet, blind, nonstructural, retained mandrel, open-end, 120° countersunk head, 5056 (UNS A95056) aluminum alloy body, C1006-C1025 (UNS G10060-G10250) nominal body diameter size, .156; grip range, .126-.187.

3. Revision letters are not used to denote changes due to the extensiveness of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:38Z
Check the source to verify that this is the current version before use.

TABLE III. DASH NUMBERS AND DIMENSIONS

MATL COMB				L	M NOM	RECOM GRIP RANGE
A	B	D	E			
A401	B302		E401	.173-.203	1.563	.040-.062
A402	B402	D402	E402	.235-.265		.063-.125
A403	B403	D403	E403	.298-.328		.126-.187
A404	B404	D404	E404	.360-.390		.188-.250
A405			E405	.423-.453	1.563	.251-.312
A406				.487-.517		.313-.375
A502			E502	.260-.290		.040-.125
A503			E503	.323-.353		.126-.187
A504			E504	.385-.415	1.688	.188-.250
A506				.510-.530	1.813	.251-.375
A508				.635-.665		.376-.500
A602			E602	.285-.315	1.688	.063-.125
A604			E604	.410-.440	1.875	.188-.250
A606			E606	.535-.565		.251-.375
A608			E608	.660-.690	2.063	.376-.500
			E610	.785-.815		.501-.625
A612				.910-.940		.626-.750

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:38Z
Check the source to verify that this is the current version before use.

Custodians:
Army - AR
Navy - AS
Air Force - 99

Review Activities:
Army - AV, MI
Air Force - 11, 82

User Activities:
National Security Agency - NS

Preparing Activity:
Navy - AS

Agent:
DLA - IS

(Project 5320-0608-5)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:38Z
Check the source to verify that this is the current version before use.