
MIL-R-24243/7C
21 September 1987
SUPERSEDING
MIL-R-24243/7B(SHIPS)
24 March 1969

MILITARY SPECIFICATION SHEET

RIVETS, BLIND, NONSTRUCTURAL, RETAINED MANDREL, CLOSED-END, 120° COUNTERSUNK HEAD, ALUMINUM ALLOY

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the retained mandrel, nonstructural, blind rivets described herein shall consist of this specification and the latest issue of MIL-R-24243.

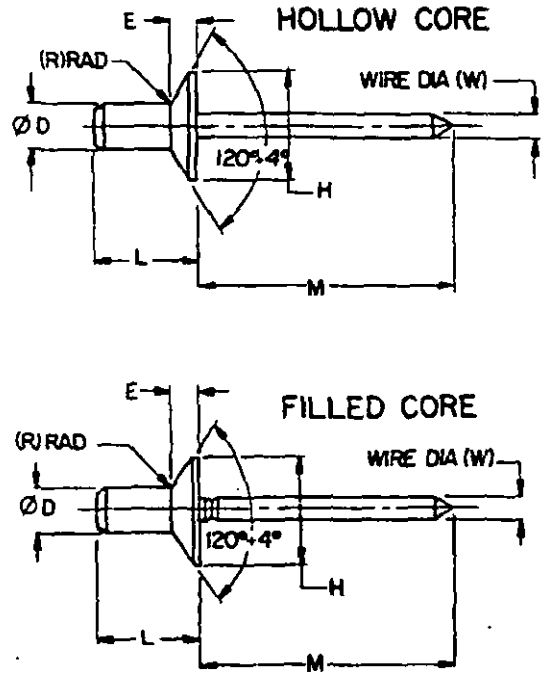

NOTES:
1. All dimensions are in inches.

FIGURE 1. RIVETS

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:39Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Material. Blind rivets shall be furnished in the following material combinations and dimensions.

TABLE I. MATERIAL COMBINATIONS


COMBINATION	BODY	MANDREL
A	5056 Aluminum Alloy (UNS A95056)	C1012 - C1025 Steel (UNS G10120-G10250) C1045 - C1075 Steel (UNS G10450-G10750)

TABLE II. BASIC DIMENSIONS

NOM DIA	BASIC DIMENSIONS					RECOMMENDED HOLE SIZE
	ØD	H	E REF	R MAX	W NOM	
.125	.128 .124	.245 .221	.042	.020	.064	.129-.133
.156	.159 .155	.328 .296	.051	.020	.086	.160-.164
.188	.190 .186	.394 .356	.060	.020	.104	.192-.196

2. Part Number. The part number shall consist of the letter "M", the basic number of this specification sheet, followed by a material combination code, followed by a nominal body diameter size code in thirty-seconds of an inch, followed by a maximum grip code in sixteenths of an inch and a core style code taken from Table III.

EXAMPLE: M24243/7A606H

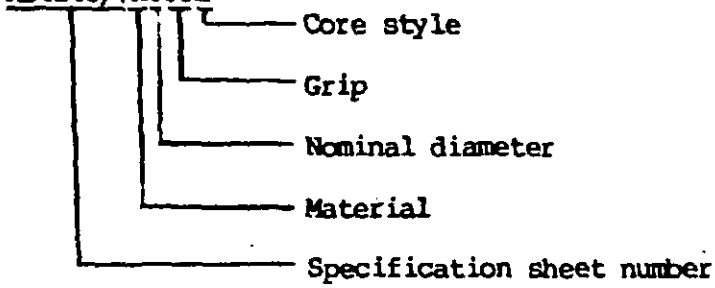

M24243/7A606H Indicates - Rivet, blind, nonstructural, retained mandrel, closed-end, 120° countersunk head, 5056 (UNS A95056) aluminum alloy body, C1012-C1025 (UNS G10120-G10250) or C1045-C1075 (UNS G10450-G10750) steel mandrel; nominal body diameter size, .188; grip range, .313-.375; style, hollow core.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:39Z
Check the source to verify that this is the current version before use.

3. Revision letters are not used to denote changes due to the extensiveness of the changes.

TABLE III. DASH NUMBERS AND DIMENSIONS

MATERIAL COMBINATIONS		M NOM		RECOM GRIP RANGE
HOLLOW CORE	FILLED CORE			
A	A			
A401H	A401F	.267-.297		.040-.062
A402H	A402F	.331-.361		.063-.125
A403H	A403F	.392-.422	1.219	.126-.187
A404H		.456-.486		.188-.250
A405H		.520-.550		.251-.312
A502H	A502F	.358-.388	1.219	.063-.125
A503H	A503F	.422-.452		.126-.187
A505H	A505F	.550-.580	1.219	.251-.312
A602H	A602F	.385-.415		.063-.125
A604H	A604F	.510-.540	1.219	.126-.250
A606H	A606F	.635-.665		.313-.375

Custodians:
Army - AR
Navy - AS
Air Force - 99

Review Activities:
Army - AV, MI
Air Force - 11, 82

User Activities:
National Security Agency - NS

Preparing Activity:
Navy - AS

Agent:
DLA - IS

(Project 5320-0608-7)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:39Z
Check the source to verify that this is the current version before use.