
MIL-S-24251/1A
1 July 1968
SUPERSEDING
MIL-S-24251/1
30 March 1967

MILITARY SPECIFICATION SHEET

SHIELD, ELECTRON TUBE, HEAT DISSIPATING, 7 AND 9 PIN, MINIATURE (CLAM SHELL)

The complete requirements for procuring the shield described herein shall consist of this document and the latest issue of Specification MIL-S-24251.

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

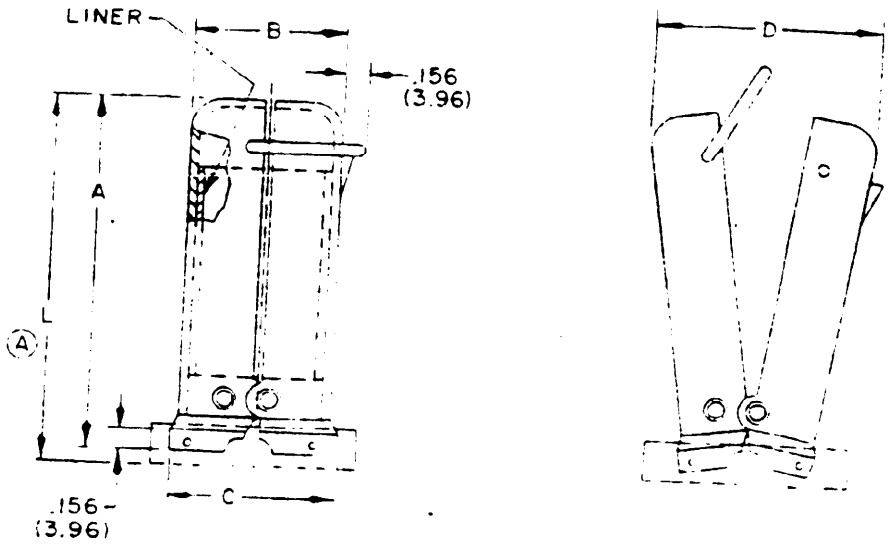

(A) denotes changes

FSC 5960

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:42Z
Check the source to verify that this is the current version before use.

Characteristics.

Dash no.	Heat dissipation temp. reduction in °C (minimum)	A ±.031 (.79)	B ±.031 (.79)	C ±.005 (.13)	D ±.02 (.51)	L ±.031 (.79)	Weight grams max	Tube envelope Style	Tube envelope Length nom.	Retainer (base) ref	Tube socket
1	50	1.478 (37.54)	.882 (22.40)	1.004 (25.50)	1.19 (30.23)	1.515 (38.48)	11.0	T-5 1/2	1.125 (28.58)	M24251/2-1	MIL-S-12883/10
2	100	1.978 (50.24)	.882 (22.40)	1.004 (25.50)	1.38 (35.05)	2.015 (51.18)	14.5	T-5 1/2	1.500 (38.10)		
3	90	2.461 (62.51)	.882 (22.40)	1.004 (25.50)	1.56 (39.62)	2.501 (63.53)	17.5	T-5 1/2	2.000 (50.80)		
4	45	1.478 (37.54)	1.022 (25.96)	1.130 (28.70)	1.38 (35.05)	1.515 (38.48)	12.5	T-6 1/2	1.125 (28.58)	M24251/2-2	MIL-S-12883/11
5	100	1.978 (50.24)	1.022 (25.96)	1.130 (28.70)	1.50 (38.10)	2.015 (51.18)	16.5	T-6 1/2	1.562 (39.67)		
6	90	2.461 (62.51)	1.022 (25.96)	1.130 (28.70)	1.75 (44.45)	2.501 (63.53)	20.0	T-6 1/2	2.000 (50.80)		

NOTES:

1. All dimensions are in inches.
2. Millimeters are in parentheses.
3. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
4. (A) Unless otherwise specified, tolerance is 2 places ±.010(.25 mm); 3 places ±.005 (.13 mm).

Source: https://assist.dla.mil -- Downloaded: 202640-19T20:42Z
Check the source to verify that this is the current version before use.

PREVIOUS EDITION IS OBSOLETE

REQUIREMENTS:

The shield, locking mechanism, liner, and other parts, as shown in the figure shall be designed to meet the requirement of MIL-S-24251, and to fit the tube envelope and retainer (base) specified in table.

Dimensions and configuration: See figure and table.

Material:

(A) Shield - Aluminum alloy number 3003, QQ-A-250/2.
(A) Liner-Beryllium copper alloy QQ-C-533.
Snap ring - Composition 302 corrosion resisting steel QQ-W-423.
Eyelets-Brass, QQ-B-613.


Finish:
Liner-Black cadmium plate QQ-P-416, class 3, type II.
Snap ring-Black oxide, MIL-C-13924, class 2.
Eyelets-Black cadmium QQ-P-416, class 1, type II.
Shell-Black matte in accordance with MIL-C-5541.

Installation force - 15 pounds maximum.

Engaging torque - 10 pound-inches maximum.

The part number consists of the basic number of this specification sheet, preceded by the lett "M", and a dash number taken from table.

Example:



Custodians:
Navy - EC
Air Force - 11

Review activities:
Navy -
Air Force - 11, 17, 85
DSA - ES

User activities:
Navy - MC, CG
Air Force - 19

Preparing activity
Navy - EC

(Project 5960-2313-2)

Source: https://assist.dla.mil -- Downloaded: 202610-19T20:42Z
Check the source to verify that this is the current version before use.