
MIL-S-24251/2A
1 July 1968
SUPERSEDING
MIL-S-24251/2
30 March 1967

MILITARY SPECIFICATION SHEET

RETAINER (BASE), SHIELD, ELECTRON TUBE, HEAT DISSIPATING, 7 AND 9 PIN, MINIATURE

The complete requirements for procuring the retainer (base) described herein shall consist of this document and the latest issue of Specification MIL-S-24251.

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

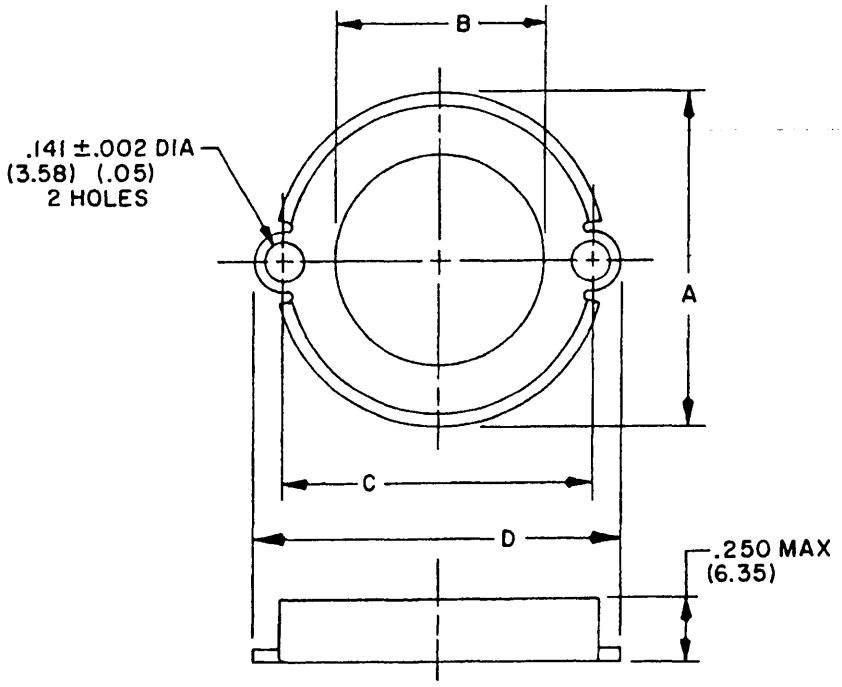

FSC 5960

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:42Z
Check the source to verify that this is the current version before use.

Characteristics.

Dash no.	A Max.	B Min.	C ±0.005 (0.13)	D Max.	Weight max. grams	Tube socket reference	Shield reference
1	1.000 (25.4)	0.636 (16.15)	0.875 (22.23)	1.100 (27.94)	2.0	MIL-S-12883/10	M24251/1-1 thru -3
2	1.230 (31.24)	0.741 (18.82)	1.125 (28.58)	1.360 (34.54)	2.5	MIL-S-12883/11	M24251/1-4 thru -6

REQUIREMENTS:

The retainer (base) and other parts, as shown in the figure, shall be designed to meet the requirements of MIL-S-24251, and to fit the shield, tube envelope, and tube socket specified in table.

Dimensions and configuration: See figure and table.

Material: .040 Aluminum, QQ-A-250/2.

Finish: Chromate, MIL-C-5541.

The part number consists of the basic number of this specification sheet, preceded by the letter "M", and a dash number taken from table.

Example:

M24251/2-1

Basic document number

Dash number from table

Custodians:
Navy - EC
Air Force - 11

Review activities:
Navy -
Air Force - 11, 17, 85
DSA - ES

User activities:
Navy - AS, OS
Air Force - 19

Preparing activity:
Navy - EC

(Project 5960-2313-3)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:42Z
Check the source to verify that this is the current version before use.