INCH-POUND

MIL-T-27/303A
13 March 1991
SUPERSEDING
MIL-T-27/303
1 DECEMBER 1980

MILITARY SPECIFICATION SHEET

TRANSFORMERS AND INDUCTORS (AUDIO, POWER, AND HIGH-POWER PULSE), INDUCTOR, POWER TF5S04ZZ

Ⓐ Inactive for new design after the date of this specification.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation. MIL-T-27.

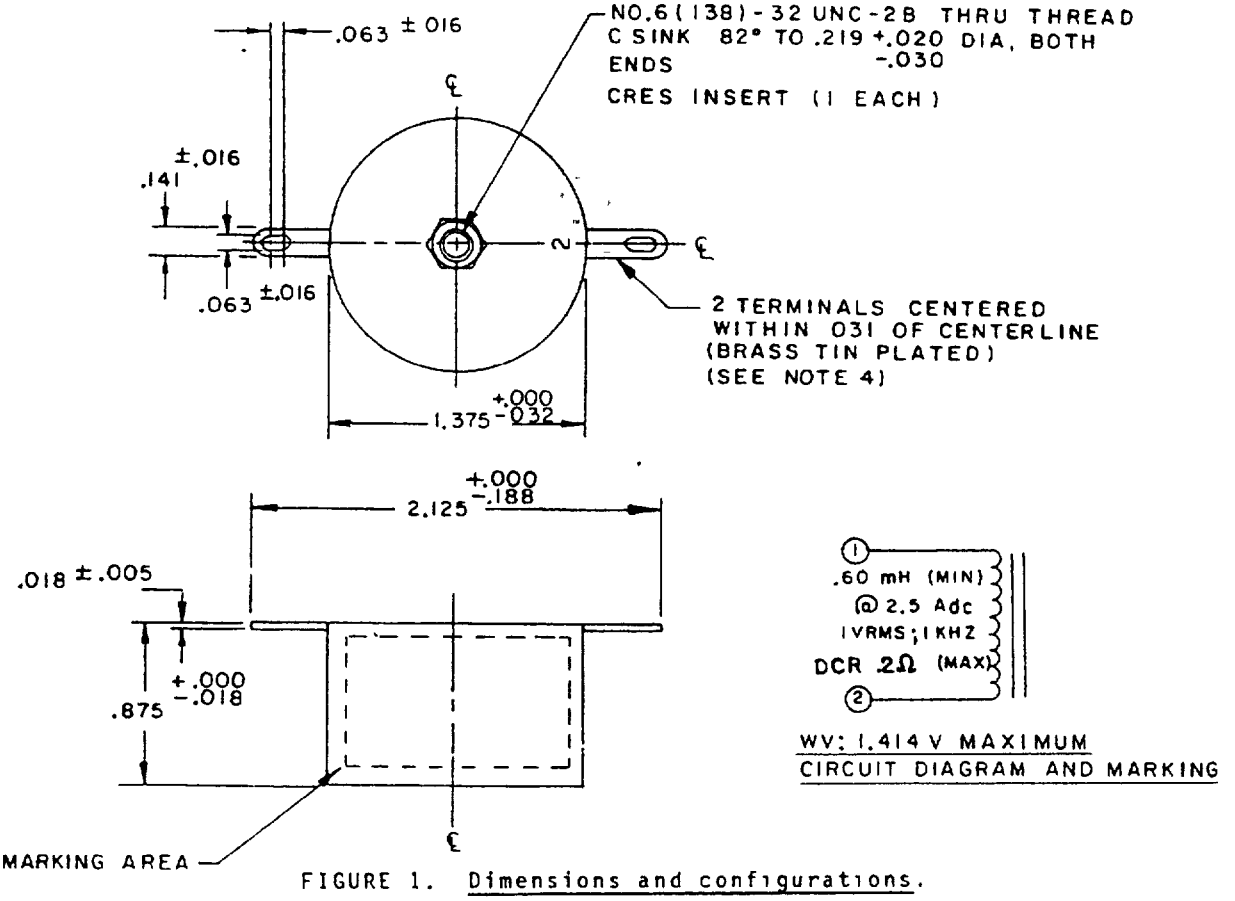


FIGURE 1. Dimensions and configurations.

Ⓐ denotes changes

DISTRIBUTION STATEMENT A Approved for public release; distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T04:06Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm
.005	0.13	.138	3.51
.016	0.41	.141	3.88
.018	0.46	.188	4.78
.020	0.51	.219	5.56
.030	0.76	.875	22.22
032	0.81	2.135	53.98
.063	1.60		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3 Marking shall be on the side of the case.
4. Terminals shall be brass, 70 percent Cu, 30 percent Zn in accordance with Federal Specification QQ-B-613.

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T04:06Z
Check the source to verify that this is the current version before use.

REQUIREMENTS: (When numbers in parentheses, i.e., (1-2) are used, they indicate the winding and the extreme terminals of the winding.)

Electrical ratings:

Inductance (1-2): 0.60 millihenry, minimum

Voltage (1-2): 1.0 volt rms, 1 kilohertz.

Current (1-2): 2.5 amperes dc.

Working voltage (1-2): 1.414 volts, maximum.

Design and construction:

Dimensions and configuration: See figure 1.

Duty cycle. Continuous.

Case: Encapsulated.

Material: Epoxy.

Terminals Solder type, brass, tin plated.

Terminal length: 0.391 inch, maximum.

Weight: 85.05 grams, maximum.

Operating temperature range: -55°C to +130°C.

Terminal strength. MIL-STD-202, method 211, test condition A, 2.0 pounds.

Dielectric withstanding voltage (at sea level) 100 volts rms.

Electrical characteristics:

Inductance. With 1.0 volt rms, 1 kilohertz, and 2.5 amperes dc applied to (1-2); the inductance shall be 0.60 millihenry, minimum.

DC resistance (1-2). 0.2 ohm, maximum.

Temperature rise: 50°C with 1.0 volt rms, 1 kilohertz, 2.5 amperes dc applied to (1-2) at an ambient temperature of 80°C, maximum.

Vibration (high frequency): MIL-STD-202, method 204, test condition A.

Shock (specified pulse): MIL-STD-202, method 213, test condition H.

Ⓐ Quality assurance provisions:

Qualification inspection: Not applicable.

Quality conformance inspection: Groups A and B tests of MIL-T-27 shall be applicable.

Marking location: See figure 1.

Part number M27/303-01

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T04:06Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - AR, MI
Navy - OS, SH
Air Force - 17, 99
DLA - ES

User activities:
Army - ME
Navy - AS, MC
Air Force - 19

Preparing activity:
Army - ER

Agent:
DLA - ES

(Project 5950-0753-49)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T04:06Z
Check the source to verify that this is the current version before use.