
MILITARY SPECIFICATION SHEET

TRANSFORMERS AND INDUCTORS
(AUDIO, POWER AND HIGH-POWER PULSE),
INDUCTOR, POWER TF5S04ZZ

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the inductor described herein shall consist of this document and the latest issue of Specification MIL-T-27.

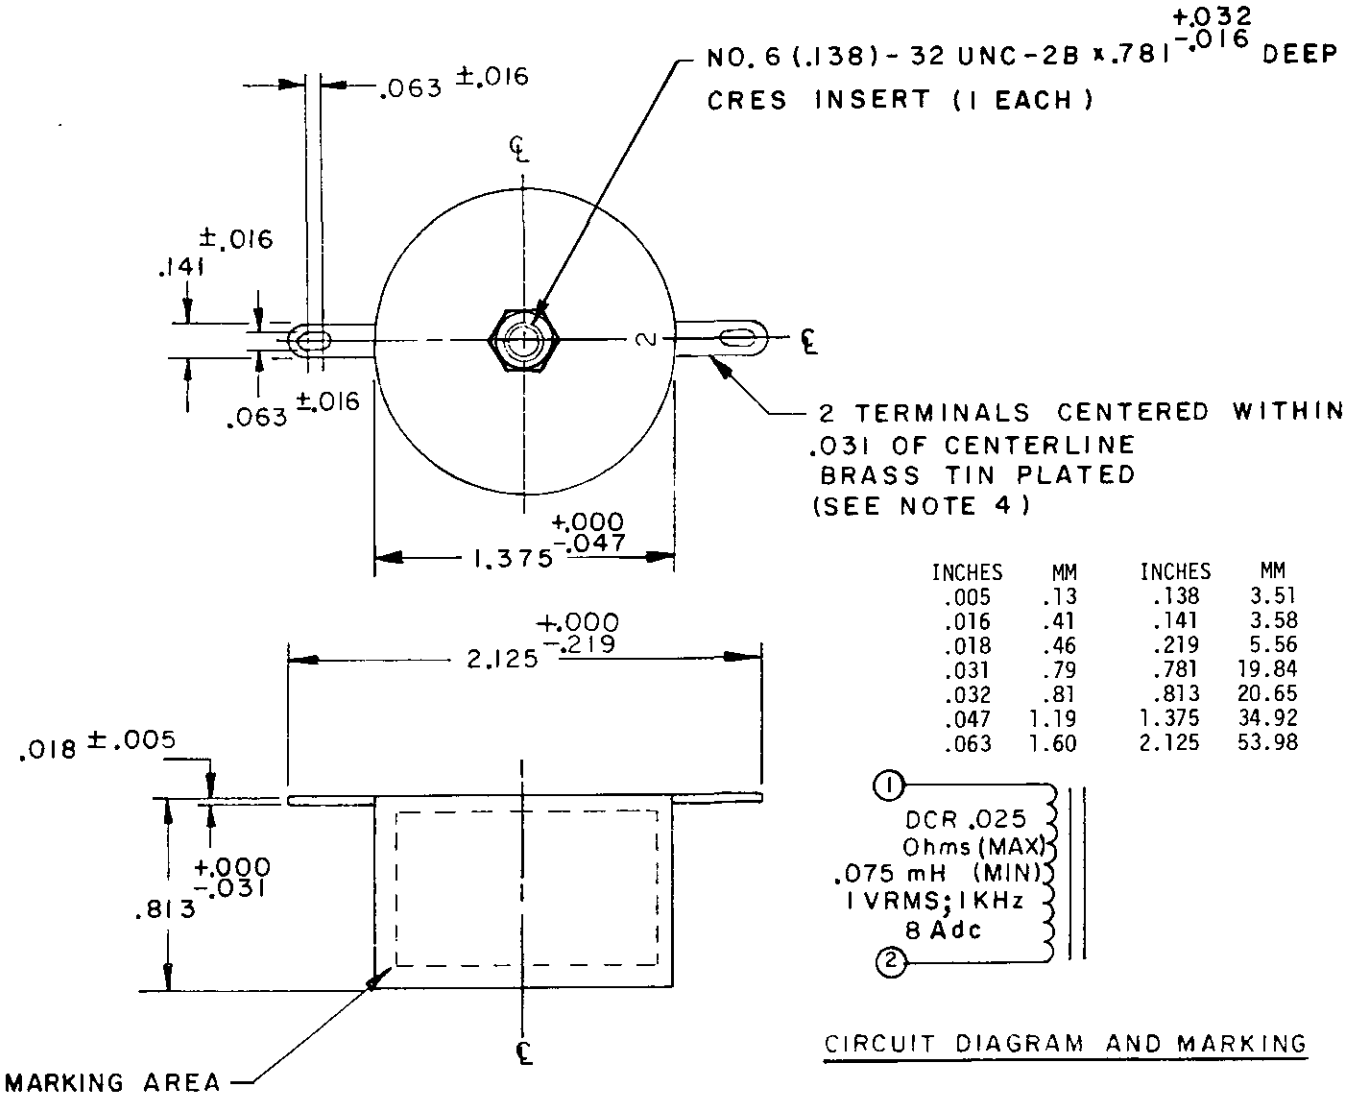

INCHES	MM	INCHES	MM
.005	.13	.138	3.51
.016	.41	.141	3.58
.018	.46	.219	5.56
.031	.79	.781	19.84
.032	.81	.813	20.65
.047	1.19	1.375	34.92
.063	1.60	2.125	53.98

CIRCUIT DIAGRAM AND MARKING

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Marking shall be on the side of the case.
4. Terminals shall be brass; 70% Cu, 30% Zn per Federal Specification QQ-B-613.

FIGURE 1. Dimensions and configuration.

FSC 5950

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T04:06Z
Check the source to verify that this is the current version before use.

REQUIREMENTS: (When numbers in parentheses, i.e., (1-2) are used, they indicate the winding and the extreme terminals of the winding.)

Electrical ratings:

Inductance (1-2): 0.075 millihenry, minimum.

Voltage (1-2): 1.0 volt rms, 1 kilohertz.

Current (1-2): 8.0 amperes dc.

Working voltage (1-2): 1.414 volts, maximum.

Design and construction:

Dimensions and configuration: See figure 1.

Duty cycle: Continuous.

Case: Encapsulated.

Material: Epoxy.

Terminals: Solder type.

Terminal height: 0.352 inch, maximum.

Weight: 85.02 grams, maximum.

Operating temperature range: -55° to +130°C.

Terminal strength: MIL-STD-202, method 211, test condition A, 2.0 pounds.

Dielectric withstanding voltage (at sea level): 100 volts rms.

Electrical characteristics:

Inductance: With 1.0 volt rms, 1 kilohertz, and 8.0 amperes dc applied to (1-2); the inductance shall be 0.075 millihenry, minimum.

DC resistance (1-2): 0.025 ohm, maximum.

Temperature rise: 50°C with 1.0 volt rms, 1 kilohertz, 8 amperes dc applied to (1-2) at an ambient temperature of 80°C, maximum.

Vibration (high frequency): MIL-STD-202, method 204, test condition A.

Shock (specified pulse): MIL-STD-202, method 213, test condition H.

Marking location: See figure 1.

Part number: M27/305-01.

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - MI
Navy - SH, OS
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - ME, AR
Navy - MC, AS
Air Force - 19

Preparing activity:
Army - ER

Agent:
DLA - ES

(Project 5950-0568-22)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T04:06Z
Check the source to verify that this is the current version before use.