
MILITARY SPECIFICATION SHEET

TRANSFORMERS AND INDUCTORS
(AUDIO, POWER AND HIGH-POWER PULSE),
INDUCTOR, POWER, TF5S04ZZ

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the inductor described herein shall consist of this document and the latest issue of Specification MIL-T-27.

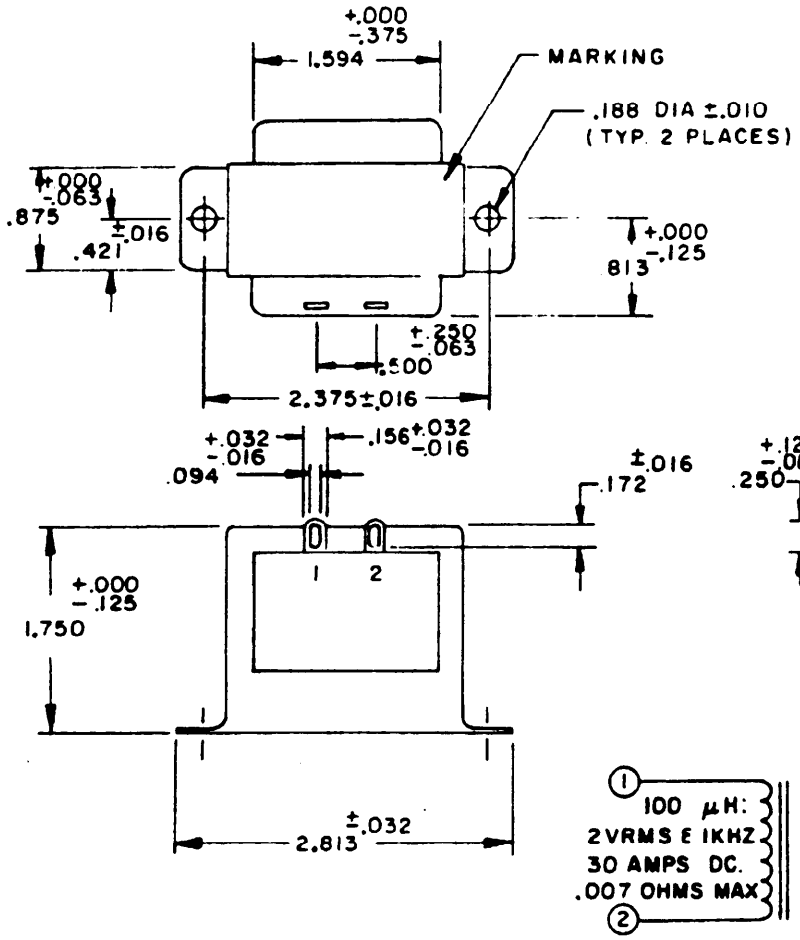

INCHES	MM	INCHES	MM
.005	.13	.188	4.78
.010	.25	.250	6.35
.016	.41	.375	9.53
.025	.64	.421	10.69
.032	.81	.500	12.70
.063	1.60	.875	22.23
.094	2.39	1.594	40.49
.125	3.18	1.625	41.28
.156	3.96	1.750	44.45
.172	4.37	2.375	60.33
		2.813	71.45

CIRCUIT DIAGRAM AND MARKING

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Marking shall be on the top of the case.

FIGURE 1. Dimensions and configuration.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T04:07Z
Check the source to verify that this is the current version before use.

REQUIREMENTS: (When numbers in parentheses, i.e., (1-2) are used, they indicate the winding and the extreme terminals of the winding.)

Electrical ratings:

Inductance (1-2): 100 microhenries minimum.

Voltage (1-2): 2.0 volts, rms, 1,000 hertz sine wave.

Current (1-2): 30 amperes dc.

Working voltage: 2.83 volts, maximum.

Design and construction:

Dimensions and configuration: See figure 1.

Duty cycle: Continuous.

Case: Encapsulated.

Material: Epoxy.

Weight: 630 grams, maximum.

Terminals: Solder terminal, brass.

Terminal height: .375 inch maximum.

Operating temperature range: -55° to +130°C.

Terminal strength: MIL-STD-202, method 211, test condition A, 5.0 pounds.

Dielectric withstanding voltage (at sea level): 500 volts rms.

Electrical characteristics:

Inductance: With 2.0 volts rms, 1 kilohertz sine wave, and 30 amperes dc applied to (1-2), the inductance shall be 100 microhenries minimum.

DC resistance: (1-2) .007 ohm, maximum.

Temperature rise: 50°C with 2.0 volts rms, 1 kilohertz, 30 amperes dc applied to (1-2) at an ambient temperature of 80°C, maximum.

Vibration (high frequency): MIL-STD-202, method 204, test condition A.

Shock (specified pulse): MIL-STD-202, method 213, test condition H.

Marking location: See figure 1.

Part number: M27/310-01.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T04:07Z
Check the source to verify that this is the current version before use.

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - MI, AR
Navy - SH, OS
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - ME
Navy - MC, AS
Air Force - 19

Preparing activity:
Army - ER

Agent:
DLA - ES

(Project 5950-0580-3)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T04:07Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.
NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE MIL-T-27/310 TRANSFORMERS AND INDUCTION (AUDIO, POWER AND HIGH-POWER PULSE), INDUCTION, POWER, TF5S04ZZ

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1 OCT 76 1426 EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T04:07Z
Check the source to verify that this is the current version before use.