MILITARY SPECIFICATION SHEET

ELECTRON TUBE, TRANSMITTING

TYPE 2E26

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the electron tube described herein shall consist of this document and the latest issue of Specification MIL-E-1.

DESCRIPTION: Beam power amplifier, F1 = 125 MHz, F2 = 175 MHz

Outline	---	See figure 1
Base	---	B8-26 or B8-44
Cap	---	C1-1
Envelope	---	T9
Cathode	---	Coated unipotential

Base connections:

Pin No.	---	1	2	3	4	5	6	7	8	Cap
Element	---	k, g3, int sd	h	g2	k, g3, int sd	g1	k, g3 int sd	h	base sleeve	a

ABSOLUTE-MAXIMUM RATINGS:

Parameter:	Ef	Eb	Ec1	Ec2	Ib	Ic1	Pp	Pg2	Pi	Ehk	Modulation	Alt
Unit:	V	Vdc	Vdc	Vdc	mAdc	mAdc	W	W	W	v	---	ft
Maximum:												
Class A audio:	6.9	300	---	200	---	---	10	2.5	---	100	---	10,000
Class AB2 audio:	6.9	400	---	200	75	---	10	2.5	30	100	---	10,000
Class C Tel:	6.9	400	-175	200	60	3.5	6.7	1.7	20	100	Anode	10,000
Class C Tlg:	6.9	500	-175	200	75	3.5	10	2.5	30	100	---	10,000
Minimum:	5.7	---	---	---	---	---	---	---	---	---	---	---
TEST CONDITIONS:	6.3	---	---	---	---	---	---	---	---	---	---	---

GENERAL:

Qualification - Required

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T13:14Z
Check the source to verify that this is the current version before use.

METHOD	REQUIREMENT OR TEST	NOTES	CONDITIONS	AQL (PERCENT DEFECTIVE)	INSPECTION LEVEL OR CODE	SYMBOL	LIMITS MIN	LIMITS MAX	UNIT
	Qualification inspection								
1236	Power oscillation (2)	-	Eb = 400 Vdc; Ec2 = variable; Ic1 = 2 mAdc; Ib = 75 mAdc; F = 125 MHz; Rg1 = 25,000 ohms	---	---	Po	15	---	W (useful power)
(F)1216	Base material insulating quality	-	Zone 5 (min)	---	---	---	---	---	---
	Quality conformance inspection, part 1								
1266	Total grid current	1	Eb = 500 Vdc; Ec2 = 200 Vdc; Ec1/Ib = 20 mAdc	0.65	II	Ic1	0	-3.0	µAdc
1256	Electrode current (anode)	-	Eb = 200 Vdc; Ec2 = 135 Vdc; Ec1 = -10 Vdc;	0.65	II	Ib	23	47	mAdc
1256	Electrode current (screen)	-	Eb = 200 Vdc; Ec2 = 135 Vdc; Ec1 = -10 Vdc	0.65	II	Ic2	---	4	mAdc
1231	Emission	1	Eb = Ec1 = Ec2 = 25 Vdc	0.65	II	Is	130	---	mAdc
---	Short and discontinuity detection	-		0.4	II	---	---	---	---
	Quality conformance inspection, part 2								
(F)1301	Heater current	-		---	---	If	740	860	mA
(F)1336	Heater-cathode leakage	-		---	---	Ihk	---	50	µAdc
(F)1236	Power oscillation (1)	-	Eb = 500 Vdc; Ec2 = 200 Vdc; Ib = 60 mAdc; Ic1 = 2 mAdc; Rg1 = 15,000 ohms; F = 15 MHz	---	---	Po	18	---	W (useful power)
(F)1331	Direct-interelectrode capacitance	2		---	---	Cgla Cin Cout	--- 11.6 6.0	0.2 14.4 8.0	pF pF pF
(F)1031	Low-frequency vibration	-	Eb = 250 Vdc; Ec2 = 200 Vdc; Ec1/Ib = 10 mAdc; Rp = 2,000 ohms	---	---	Ep	---	500	mVac
1121	Metallic base sleeve quality	-		---	---	---	---	---	---
1101	Secureness of base, cap, or insert	-		---	---	---	---	---	---
1111	Base pin solder depth	-		---	---	---	---	---	---
1211	Insulation of electrodes	-		---	---	---	---	---	---
1105	Permanence of marking	-		---	---	---	---	---	---

Source: https://assist.dla.mil -- Downloaded: 20261O-15T13:14Z
Check the source to verify that this is the current version before use.

METHOD	REQUIREMENT OR TEST	NOTES	CONDITIONS	AQL (PERCENT DEFECTIVE)	INSPECTION LEVEL OR CODE	SYMBOL	LIMITS		UNIT
							MIN	MAX	
	Quality conformance inspection, part 3								
---	Life test	-	Group C; Eb = 500 Vdc; Ec2 = 200 Vdc; Ec1/Ib = 20 mAdc	---	---	---	---	---	---
---	Life-test end point (500 hours):								
1231	Emission	-		---	---	Is	100	---	mAdc

NOTES:

1. This test to be performed at the conclusion of the holding period.
2. No shield. Base sleeve tied to cathode for each capacitance measurement.

Custodians:
Army - EL
Navy - EC
Air Force - 85

Review activities:
Army - MU
Air Force - 99
DSA - ES


User activities:
Army - WC
Navy - AS, OS, MC, CG
Air Force - 11

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5960-3141)

Source: https://assist.dla.mil -- Downloaded: 202610-15T13:14Z
Check the source to verify that this is the current version before use.

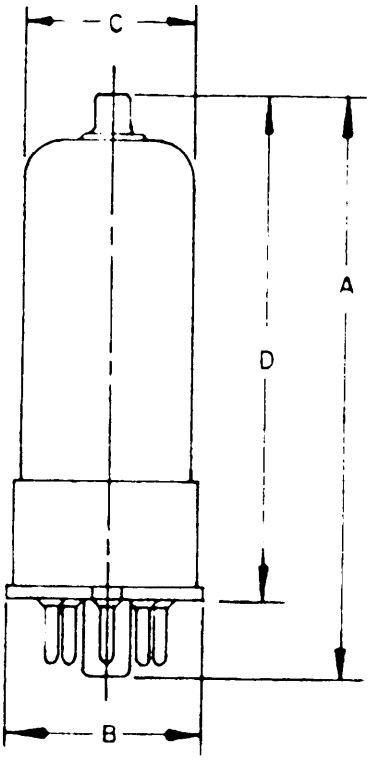

Ltr	Dimensions in inches with metric equivalents (mm) in parentheses	
	Minimum	Maximum
Quality conformance inspection, part 1		
A	3.344 (84.94)	3.656 (92.86)
B		1.312 (33.32)
C	1.062 (26.97)	1.188 (30.18)
D	2.781 (70.64)	3.094 (78.59)

(F)

FIGURE 1. Outline drawing of electron tube type 2E26.

Source: https://assist.dla.mil -- Downloaded: 202640-15T13:14Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY
NAVAL ELECTRONIC SYSTEMS COMMAND
WASHINGTON, D.C. 20360

POSTAGE AND FEES PAID
NAVY DEPARTMENT
DOD 316

OFFICAL BUSINESS

COMMANDER
NAVAL ELECTRONIC SYSTEMS COMMAND
DEFENSE STANDARDIZATION PROGRAM BRANCH
DEPARTMENT OF THE NAVY
WASHINGTON, D. C. 20360

FOLD

Source: https://assist.dla.mil -- Downloaded: 202610-15T13:14Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

S/N 0102-014-1802

Source: https://assist.dla.mil -- Downloaded: 202640-15T13:14Z
Check the source to verify that this is the current version before use.