MILITARY SPECIFICATION SHEET

ELECTRON TUBE, TRANSMITTING

TYPE 2E26

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the electron tube described herein shall consist of this specification and the latest issue of MIL-E-1.

DESCRIPTION: Beam power amplifier, F1 = 125 MHz, F2 = 175 MHz

Outline	---	See figure 1
Base	---	B8-26 or B8-44
Cap	---	C1-1
Envelope	---	T9
Cathode	---	Coated unipotential

Base connections:

Pin No.	---	1	2	3	4	5	6	7	8	Cap
Element	---	k, g3, int sd	h	g2	k, g3, int sd	g1	k, g3 int sd	h	base sleeve	a

ABSOLUTE-MAXIMUM RATINGS:

Parameter:	Ef	Eb	Ec1	Ec2	Ib	Ic1	Pp	Pg2	Pi	Ehk	Modulation	Alt
Unit:	V	Vdc	Vdc	Vdc	mAdc	mAdc	W	W	W	v	---	ft
Maximum:												
Class A audio:	6.9	300	---	200	---	---	10	2.5	---	100	---	10,000
Class AB2 audio:	6.9	400	---	200	75	---	10	2.5	30	100	---	10,000
Class C Tel:	6.9	400	-175	200	60	3.5	6.7	1.7	20	100	Anode	10,000
Class C Tlg:	6.9	500	-175	200	75	3.5	10	2.5	30	100	---	10,000
Minimum:	5.7	---	---	---	---	---	---	---	---	---	---	---
TEST CONDITIONS:	6.3	---	---	---	---	---	---	---	---	---	---	---

GENERAL:

Qualification: Not required

Ⓖ denotes changes

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil - Downloaded: 2026-10-15T13:14Z
Check the source to verify that this is the current version before use.

Method	Requirement or test	Notes	Conditions	Symbol	Limits		Unit
					Min	Max	
	Quality conformance inspection, part 1	1					
1266	Total grid current	2	Eb = 500 Vdc; Ec2 = 200 Vdc; Ec1/Ib = 20 mAdc	Ic1	0	-3.0	µAdc
1231	Emission	2	Eb = Ec1 = Ec2 = 25 Vdc	Is	130	---	mAdc
1256	Electrode current (anode)		Eb = 200 Vdc; Ec2 = 135 Vdc; Ec1 = -10 Vdc	Ib	23	47	mAdc
1256	Electrode current (screen)		Eb = 200 Vdc; Ec2 = 135 Vdc; Ec1 = -10 Vdc	Ic2	--	4	mAdc
---	Short and discontinuity detection	3		---	---	---	---
	Quality conformance inspection, part 2						
1301	Heater current			If	740	860	mA
1336	Heater-cathode leakage			Ihk	---	50	µAdc
1236	Power oscillation (1)		Eb = 500 Vdc; Ec2 = 200 Vdc; Ib = 60 mAdc; Ic1 = 2 mAdc; Rg1 = 15,000 ohms; F = 15 MHz	Po	18	---	W (useful power)
1331	Direct-interelectrode capacitance	4	No shield	Cg1a Cin Cout	--- 11.6 6.0	0.2 14.4 8.0	pF pF pF
1031	Low-frequency vibration		Eb = 250 Vdc; Ec2 = 200 Vdc; Ec1/Ib = 10 mAdc; Rp = 2,000 ohms	Ep	---	500	mVac
Ⓖ 1101	Secureness of base, cap, or insert	5		---	---	---	---
Ⓖ 1111	Base pin solder depth	5		---	---	---	---
Ⓖ 1105	Permanence of marking	5		---	---	---	---


Source: https://assist.dla.mil -- Downloaded: 2026-10-15T13:14Z
Check the source to verify that this is the current version before use.

	Method	Requirement or test	Notes	Conditions	Symbol	Limits Min	Limits Max	Unit
		Quality conformance inspection, part 3						
	---	Life test		Group C; Eb = 500 Vdc; Ec2 = 200 Vdc; Ec1/Ib = 20 mAdc	---	---	---	---
	---	Life-test end point (500 hours):						
	1231	Emission		Eb = Ec1 = Ec2 = 25 Vdc	Is	100	---	mAdc
Ⓖ	1236	Power oscillation (2)	5	Eb = 400 Vdc; Ec2 = variable; Ic1 = 2 mAdc; Ib = 75 mAdc; F = 125 MHz; Rg1 = 25,000 ohms	Po	15	---	W (useful power)
Ⓖ	1216	Base material insulating quality	5	Zone 5 (min)	---	---	---	---

NOTES:

1. Unless otherwise specified, the AQL (percent defective) for all tests listed in QCI, part 1, shall be 0.65, inspection level II.
2. This test shall be performed at the conclusion of the holding period.
3. The AQL (percent defective) shall be 0.4, inspection level II.
4. The base sleeve shall be tied to the cathode for each capacitance measurement.
5. This test shall be performed during the initial production and once each succeeding 12-calendar month period in which there is production. A regular double sampling plan shall be used, with the first sample of three tubes having an acceptance number of zero, and a second sample of three tubes having a combined acceptance number of one. In the event of failure, the test shall be made as a part of quality conformance inspection, part 2, AQL 6.5, inspection level S3. The regular "12-calendar month" double sampling plan shall be reinstated after three consecutive samples have been accepted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T13:14Z
Check the source to verify that this is the current version before use.

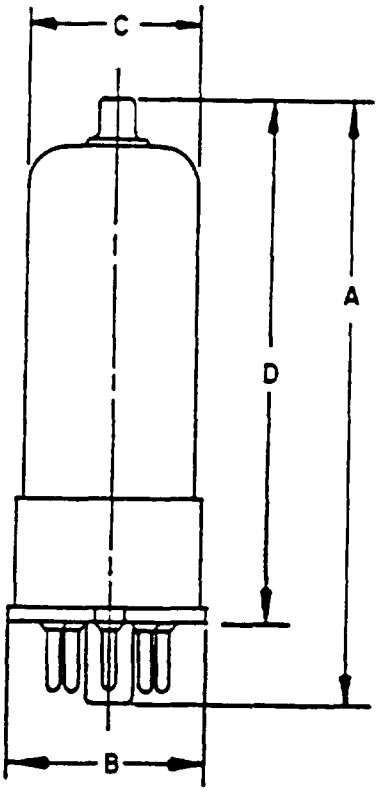

Ltr	Dimensions in inches with metric equivalents (mm) in parentheses	
	Minimum	Maximum
Quality conformance inspection, part 1		
A	3.344 (84.94)	3.656 (92.86)
B		1.312 (33.32)
C	1.062 (26.97)	1.188 (30.18)
D	2.781 (70.64)	3.094 (78.59)

FIGURE 1. Outline drawing of electron tube type 2E26.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T13:14Z
Check the source to verify that this is the current version before use.

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - AR
Air Force - 99
DLA - ES

User activities:
Navy - AS, OS, MC, CG
Air Force - 11

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5960-3357)

Source: https://assist.dla.mil - Downloaded: 2026-10-15T13:14Z
Check the source to verify that this is the current version before use.