INCH-POUND

MIL-PRF-26385G
24 September 013
SUPERSEDING
MIL-PRF-26385F
16 March 1998

PERFORMANCE SPECIFICATION

HOSE, OXYGEN AND PRESSURIZATION, OZONE RESISTANT


This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers ozone resistant hoses for use with pressurizing and oxygen breathing systems.

1.2 Size. This specification covers hoses conforming to the internal diameters and lengths identified in the table on figure 1 (see 6.2 and 6.12).

1.3 Part or Identifying Number (PIN). The PINs to be used for the hose acquired to this specification are created as follows (see figure 1). M26385 dash numbers supersede MS27797 dash numbers.

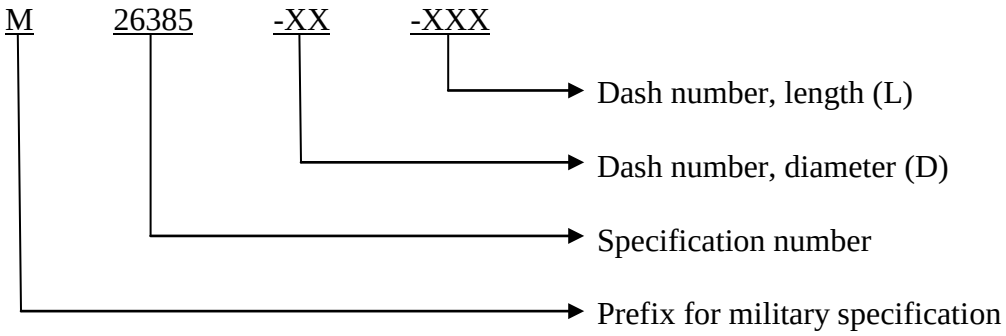

Comments, suggestions, or questions on this document should be addressed to Oklahoma City Air Logistics Center/ENSDAA, 3001 Staff Drive, Tinker AFB, OK 73145 or emailed to af71@tinker.af.mil. Since contact information can change, you may want to verify the currency or this address information using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T09:32Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3, 4, or 5 of this specification. This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements of the documents cited in sections 3, 4, or 5 of this specification, whether or not they are listed.

2.2 Government documents.

2.2.1 Specifications, and standards. The following specifications and standards form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

FEDERAL SPECIFICATIONS

BB-A-1034	-	Compressed Air, Breathing

FEDERAL STANDARDS

FED-STD-191	-	Textile Test Methods
FED-STD-595/34079	-	Lusterless Green

COMMERCIAL ITEM DESCRIPTIONS

A-A-59503	-	Nitrogen, Technical

DEPARTMENT OF DEFENSE SPECIFICATIONS

MIL-PRF-27210	-	Oxygen, Aviator's Breathing, Liquid and Gas

DEPARTMENT OF DEFENSE STANDARDS

AN807	-	Adapter, Straight, Tube To Hose

(Copies of these documents are available online at http://quicksearch.dla.mil or from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094.)

2.3 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

AEROSPACE INDUSTRIES ASSOCIATION of AMERICA, INC. (AIA)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T09:32Z
Check the source to verify that this is the current version before use.

NAS397	-	Clamp - Ratchet, One Piece

(NA/NAS documents may be obtained online at www.aia-aerospace.org/ or from Aerospace Industries Association 1000 Wilson Boulevard, Suite 1700 Arlington, VA 22209-3928.)

SAE INTERNATIONAL

SAE-AS1065	-	Quality & Serviceability Requirements for Aircraft Cylinder Assemblies Charged With Aviator's Breathing Oxygen
SAE-AS1933	-	Hose Containing Age-Sensitive Elastomeric Material, Age Controls for
SAE-AS5132	-	Fitting End – Hose Connection, Design Standard

(SAE documents may be obtained at http://www.sae.org or from Society of Automotive Engineers World Headquarters, 400 Commonwealth Drive, Warrendale, PA 15096-0001, USA.)

ASTM INTERNATIONAL

ASTM-D1149	-	Rubber Deterioration-Surface Ozone Cracking in a Chamber

(ASTM documents may be obtained at http://www.astm.org or addressed to ASTM International 100 Barr Harbor Drive, West Conshohocken, PA 19428-2959, USA.)

AMERICAN SOCIETY FOR QUALITY (ASQ)

ASQ Z1.4	-	Sampling Procedures and Tables for Inspection by Attributes

(ASQ documents may be obtained at http://www.asq.org or addressed to American Society for Quality, P.O. Box 3005, Milwaukee, WI 53201-3005.)

2.4 Order of precedence. Unless otherwise noted herein or in the contract, in the event of a conflict between the text of this document and the references cited herein (except for related specification sheets), the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 First article. When specified (see 6.2), the hose shall be subjected to first article inspection in accordance with 4.2.

3.2 Recycled, recovered, or environmentally preferable materials. Recycled, recovered, or environmentally preferable materials should be used to the maximum extent possible, provided

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T09:32Z
Check the source to verify that this is the current version before use.

that the material meets or exceeds the operational and maintenance requirements, and promotes economically advantageous life cycle costs.

3.3 Materials. All materials shall be suitably treated to resist corrosion due to electrolytic decomposition and any other atmospheric condition that may be encountered during operational use or storage. The use of toxic chemicals, hazardous substances, or ozone depleting chemicals shall be avoided, whenever feasible (see 6.3).

3.3.1 Ozone resistance. End cover material, inner liner material, and elastomers shall be ozone resistant.

3.4 Interface.

3.4.1 Color. The exterior of the hose shall be lusterless green, color 34079 of FED-STD-595

3.4.2 Fittings. The hose shall be compatible with fittings conforming to AN807 and SAE-AS5132), and with hose clamps conforming to NAS397.

3.4.3 Dimensions. The hose shall conform to the dimensions shown in figure 1.

3.5 Performance.

3.5.1 Components.

3.5.1.1 Hose reinforcement. The hose shall be reinforced (see 6.4 and figure 1).

3.5.1.2 Inner liner. The hose shall be provided with an inner liner (see figures 1 and 2).

3.5.1.3 End cover. The hose shall be provided with an end cover 0.750 inches in length on each end (see figures 1 and 2).

3.5.1.4 Outer covering. The hose shall be provided with an outer covering (see 6.5 and figures 1 and 2).

3.5.2 Leakage. With an internal pressure of 25 psi, the hose shall not leak.

3.5.3 Delamination. Under a vacuum of 16 inches of mercury, the inner liner shall not delaminate.

3.5.4 Cleanliness. All surfaces shall be free of visible particulates (50 microns and larger), free of visible fluorinated lubricants, and free of hydrocarbon contamination to a level not greater than 3 milligrams per square foot (mg/ft^2) (see 6.10).

3.5.5 Flexibility. The hose shall be free from any permanent set after being coiled around a 1.5 inch diameter rod and rotated 90° about its longitudinal axis four times (see 6.6).

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T09:32Z
Check the source to verify that this is the current version before use.

3.5.6 Elongation. The hose, when suspended vertically with a 60 pound weight suspended from the lower end, shall not elongate more than 2 inches per foot of hose length. Any permanent set shall not exceed 2% of the hose length.

3.5.7 Static load. Under a static load of 225 pounds normal to the diameter of a 4-inch length of the hose, the outside diameter shall not be decreased more than 10% of the original value. After removal of the static load, the outside diameter of the hose shall be within 5% of the original diameter.

3.5.8 Flexibility endurance. The hose shall withstand being coiled and uncoiled around a 1.5 inch diameter rod 500 times. The hose shall then withstand being twisted 180° in both directions 500 times.

3.5.9 Abrasion. The hose shall withstand abrasion occurring during normal usage.

3.5.10 Odor. The hose shall be odorless.

3.5.11 Low temperature. The hose shall withstand exposure to -65° ± 5°F for 48 hours.

3.5.12 High temperature. The hose shall withstand exposure to 160° ± 5°F for 48 hours.

3.5.13 Age. Hose shall be no more than 12 months old from the cure date to the acceptance date as defined in SAE-AS1933 (see 6.3).

3.5.14 Weight. The hose shall not exceed 3.0 ounces per foot of length.

3.5.15 Identification. The hose shall be permanently and legibly marked with the following data (see 6.2):

a. Nomenclature.
b. Cure date.
c. PIN.
d. National stock number.
e. Manufacturer’s CAGE code.
f. Manufacturer’s part number.

3.6 Interchangeability. All parts having the same manufacturer’s part number shall be functionally and dimensionally interchangeable.

4. VERIFICATION

4.1 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article (see 4.2).
b. Conformance (see 4.3).

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T09:32Z
Check the source to verify that this is the current version before use.

4.2 First article inspection. First article inspection shall be performed on two 12-inch length hoses and shall consist of all tests in section 4.6.

4.3 Conformance inspection. Conformance inspection shall consist of the individual tests in 4.3.1 and the sampling tests in 4.3.2.

4.3.1 Individual tests. Each hose shall be subjected to the following tests:

a. Examination (see 4.6.1).
b. Leakage (see 4.6.2).
c. Delamination (see 4.6.3).

4.3.2 Sampling tests. Sampling tests shall be performed in accordance with the guidance in ASQ Z1.4. Sampling shall begin at the normal inspection level (see 6.7). The sampling tests are:

a. Cleanliness (see 4.6.4).
b. Flexibility (see 4.6.5).
c. Elongation (see 4.6.6).
d. Static load (see 4.6.7).
e. Odor (see 4.6.10).

4.4 Test conditions. Unless otherwise specified herein, all tests shall be performed under the following test conditions:
a. Ambient atmospheric conditions.
b. Oxygen conforming to Type I of MIL-PRF-27210.

4.5 Requirements cross-reference matrix. Table I provides a cross-reference matrix of the section 3 requirements tested or verified in the paragraphs below.

TABLE I. Requirements cross-reference matrix

Requirement	Verification	Requirement	Verification
3.1	4.2	3.5.5	4.6.5, 4.6.8
3.3	4.6.1	3.5.6	4.6.6
3.3.1	4.6.13	3.5.7	4.6.7
3.4.1	4.6.1	3.5.8	4.6.8
3.4.2	4.6.1, 4.6.2	3.5.9	4.6.9
3.4.3	4.6.1	3.5.10	4.6.10
3.5.1.1	4.6.5, 4.6.6, 4.6.7	3.5.11	4.6.11
3.5.1.2	4.6.1, 4.6.3	3.5.12	4.6.12
3.5.1.3	4.6.1	3.5.13	4.6.14
3.5.1.4	4.6.1	3.5.14	4.6.1
3.5.2	4.6.2	3.5.15	4.6.1
3.5.3	4.6.3	3.6	4.6.1
3.5.4	4.6.4		

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T09:32Z
Check the source to verify that this is the current version before use.

4.6 Tests.

4.6.1 Examination. The hose shall be examined to determine that the materials, interface, inner liner, end cover, outer covering, weight, identification, and interchangeability conform to this specification.

4.6.2 Leakage. With fittings conforming to AN807 or SAE-AS5132, and secured by a clamp conforming to NAS397, the hose shall be subjected to a static pressure of 25 psi for 2 minutes. The hose shall not leak (see 6.8).

4.6.3 Delamination. With one end of the hose capped, a vacuum equivalent to 16 inches of mercury shall be applied to the hose for 10 minutes. While the vacuum is maintained, the inner liner shall show no evidence of delamination (see 6.9).

4.6.4 Cleanliness. All surfaces shall be free of visible particulates (50 microns and larger), free of visible fluorinated lubricants, and free of hydrocarbon contamination to a level not greater than 3 mg/ft² (see 6.10). Cleanliness of the surfaces shall be demonstrated by industrially accepted methods and these cleaning and verification methods shall be identified (see 6.2 and 6.10).

4.6.5 Flexibility. The hose shall be coiled and uncoiled around a 1.5 inch diameter rod four times; after each coiling and uncoiling the hose shall be turned 90° clockwise about its longitudinal axis. The hose shall have no permanent set.

4.6.6 Elongation. The hose shall be suspended by one end, vertically, and a 60 pound pull shall be applied for 10 minutes. The length shall increase no more than 16% of the hose length. Two minutes after removal of the force, the hose shall have no permanent set in excess of 2% of the hose length.

4.6.7 Static load. A static load of 225 pounds shall be applied to a 4 inch section of the reinforced portion of the hose, and this force shall be normal to the longitudinal axis. With the load applied, the outside diameter shall not reduce more than 10 percent. Two minutes after the load is removed, the reduction of the outside diameter shall be no more than 5 percent.

4.6.8 Flexibility endurance. The hose shall be coiled and uncoiled around a 1.5 inch diameter rod 500 times. The hose shall then be twisted 180° in both directions about its longitudinal axis 500 times in each direction. The hose shall then be subjected to the leakage and delamination tests.

4.6.9 Abrasion. Two samples of the hose shall be subjected to the test in FED-STD-191, Method 5308, dry conditions. A minimum force of 1 pound shall be maintained between the abradant and hose throughout the test. The reinforced sections of the hose shall withstand 10,000 cycles of abrasion without exposing the reinforced wire (see 6.11).

4.6.10 Odor. Oxygen conforming to MIL-PRF-27210 shall be flowed through the hose at 10 liters per minute for 2 minutes and then tested for odor in accordance with SAE-AS1065.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T09:32Z
Check the source to verify that this is the current version before use.

4.6.11 Low temperature. The hose shall be subjected to -65° ± 5°F for 48 hours. After this period and while still at this temperature, the hose shall be subjected to the flexibility test. After returning to room temperature, the hose shall be subjected to the leakage, delamination, and odor tests.

4.6.12 High temperature. The hose shall be subjected to 160° ± 5°F for 48 hours. While still at 160°F, the hose shall be subjected to the flexibility test. After returning to room temperature, the hose shall be subjected to the leakage, delamination, and odor tests.

4.6.13 Ozone resistance. Samples of the end cover, inner liner, and elastomer materials shall be tested in accordance with ASTM-D1149 (see 6.3). The test samples shall be elongated 20%, placed in an ozone free atmosphere for 24 hours, and then subjected to an ozone environment. The temperature shall be 100° ± 5°F, the ozone concentration shall be 120 ± 10 parts per million by volume, and the air velocity across the sample shall be at least 2 feet per second. The material shall be exposed to these conditions for 60 minutes. The test slabs shall be examined under 10X magnification for evidence of damage such as blooming, checking, or cracking.

4.6.14 Age. The age of the hose shall be verified to be no more than 12 months from cure date to the acceptance date in accordance with SAE-AS1933.

5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When actual packaging of materiel is to be performed by DoD or in-house contractor personnel, these personnel need to contact the responsible packaging activity to ascertain packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activities within the Military Service or Defense Agency, or within the military service's system commands. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

6. NOTES

(This section contains information of a general or explanatory nature which may be helpful, but is not mandatory.)

6.1 Intended use. The hoses covered by this specification are intended for use with aircraft oxygen and pressurizing systems. The hoses supply air or oxygen for breathing or pressurizing purposes when used with altitude suits, anti-G suits, and ejection seat or escape capsule equipment.

6.2 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number, and date of this specification.
b. Size (see 1.2).
c. When first article is required (see 3.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T09:32Z
Check the source to verify that this is the current version before use.

d. Item identification (see 3.5.15 items a, c, and d).
e. The requirement for the vendor to identify proposed cleaning and verification methods (see 4.6.4).
f. Packaging requirements (see 5.1).
g. Data required.

6.3 Materials. Previously, material certification sheets were used to validate contractor's material selection.

6.4 Hose reinforcement. Previous hoses used an integral corrosion resistant wire conforming to ASTM-A313/A313M.

6.5 Outer covering. Previous hoses used outer coverings made from tubular polyamide or polyester material of knitted or braided construction.

6.6 Permanent set. A permanent set is defined as a permanent change in the physical shape of the hose after all forces have been removed.

6.7 Sampling inspection. In previous acquisitions, hoses offered for delivery at one time were considered a lot, and random samples were selected from each lot in accordance with inspection level S-2, ASQ Z1.4).

6.8 Leakage. Previously, hoses were tested by horizontally submerging them in water while internally pressurized.

6.9 Delamination testing. Previously, the delamination test used an end cap with a viewing window at one end and a vacuum source with a light at the other end. While under a vacuum, the interior of the hose was examined for evidence of delamination

6.10 Cleaning. See MIL-STD-1330 and SAE-ARP-1176 for guidance on proven cleaning methods and verifications. Visible inspections are typically conducted using white light and ultraviolet light to detect particulates and some types of hydrocarbons. The non-volatile residue (NVR) test in SAE-ARP-1176 may be used to baseline the hydrocarbon verification at an acceptable contamination level, however, other cleaning and verification methods that do not contain class I and II ODC solvents should be used for production.

6.11 Abrasion test. Previous procurements used a Schiefer machine modified to retain a 2-inch section of hose.


6.12 Superseding data. Superseded dash numbers are listed in the table on figure 1.

6.13 Subject term (key word) listing.

altitude suit
anti-G suit
ejection seat

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T09:32Z
Check the source to verify that this is the current version before use.

escape capsule

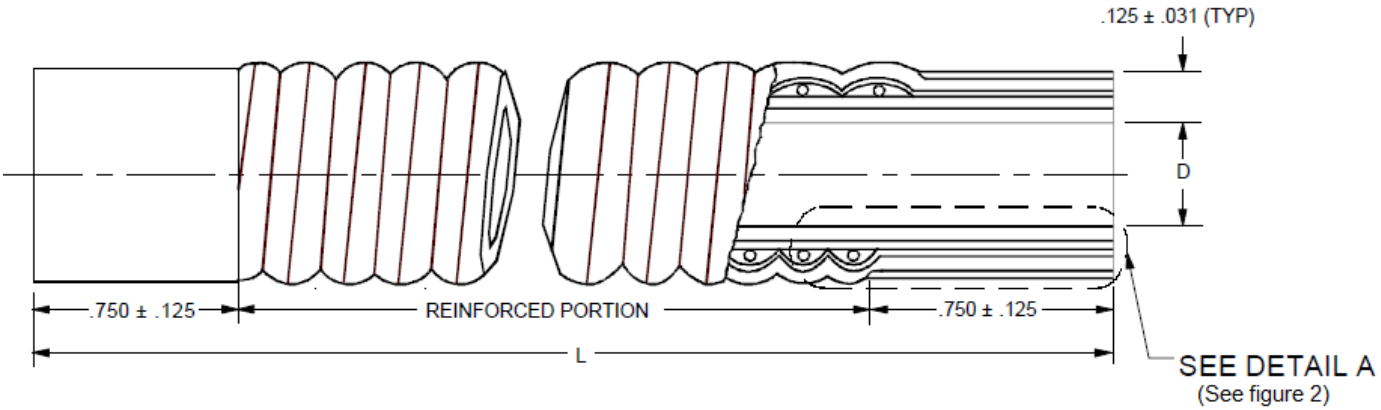


M26385 dash number (Note 3)	D □ .031 (Inches)	L + 5%, - 0% (Inches)	Superseding MS27797 dash number
-2	0.125	-	-
-4	0.250	-	-
-6	0.375	-	-
-6-052	0.375	5.2	-6-052
-6-060	0.375	6.0	-6-060
-6-140	0.375	14.0	-6-140
-6-214	0.375	21.4	-6-214
-8	0.500	-	-
-10	0.625	-	-
-10-080	0.625	8.0	-10-080
-10-085	0.625	8.5	-10-085
-10-115	0.625	11.5	-10-115
-10-120	0.625	12.0	-10-120
-10-180	0.625	18.0	-10-180
-10-200	0.625	20.0	-10-200
-10-240	0.625	24.0	-10-240
-12	0.750	-	-

Notes:

1. Dimensions are in inches.
2. Tolerances are as specified.
3. First dash number is inside diameter and the second dash number is length. If second dash number is not listed, length can be specified in other than standard lengths.
4. Drawing is not to scale.
5. End notes and dimensions apply to both ends.

FIGURE 1. Hose.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T09:32Z
Check the source to verify that this is the current version before use.

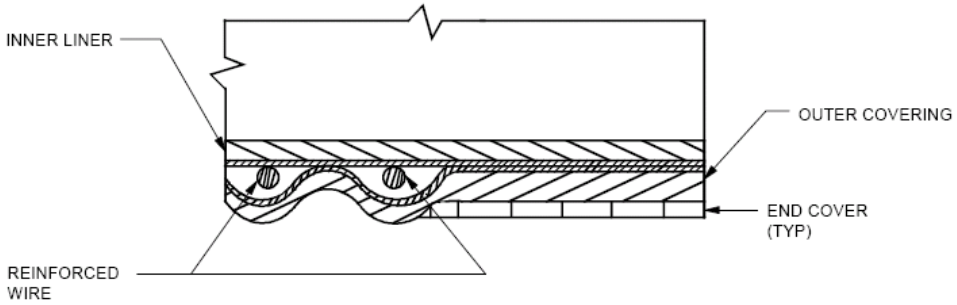

Notes:

1. Hose size determined by the table on figure 1.
2. Drawing is not to scale.

FIGURE 2. Hose end – detail A.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T09:32Z
Check the source to verify that this is the current version before use.

6.14 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Army - AT
Air Force - 71

Preparing Activity:
Air Force - 71

Review activities:
Air Force - 11
DLA - CC

(Project 4720-2013-010)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T09:32Z
Check the source to verify that this is the current version before use.