MILITARY SPECIFICATION

DUMMY CONVERTER, LIQUID OXYGEN INDICATOR
SYSTEM 10 LITER CRU-23/A

This amendment forms a part of MIL-D-26392B(USAF), dated 30 SEPTEMBER 1980, and is approved for use within the Department of the Air Force and is available for use by all Department and Agencies of the Department of Defense.

PAGE 1

Delete "2.1" and add: "2.1 Government documents".

Add: "2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation."

Change address in beneficial comments block to "Oklahoma City Air Logistics Center/MMEDO, Tinker AFB OK 73145-5990".

PAGE 2

Under STANDARDS, add: "Federal".

Under STANDARDS, Federal, add: "FED-STD-209A Clean Room and Work Station Requirements Controlled Environment".

Under STANDARDS, Military, delete "MIL-STD-794" and add: "MIL-STD-2073-1 DOD Material Procedures For Development and Application of Packaging Requirements".

PAGE 4

Add: "3.10 Recovered materials. Recovered materials shall be used to the maximum extent possible without jeopardizing the end use of the item."

Add: "4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material."

PAGE 7

Delete Section 5 in its entirety and add:

DISTRIBUTION STATMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T09:33Z
Check the source to verify that this is the current version before use.

"5 PACKAGING.

5.1 Preservation-packaging. Preservation-packaging shall be level A IAW MIL-STD-2073-1. All preservation and packaging shall be accomplished IAW Federal Standard 209A.

5.1.1 Level A. Unless otherwise specified, each dummy converter shall be preserved Method IA8 of Specification MIL-P-116.

5.1.1.1 Cleaning and drying. Each dummy converter shall be cleaned and dried for oxygen service in accordance with industry practice according to the applicable processes of MIL-P-116. Petroleum and other flammable solvents shall not be used.

5.1.1.2 Preservation application. No preservatives shall be applied.

5.1.1.3 Unit packaging. Unless otherwise specified by the contracting activity, dummy converters shall be individually packaged in accordance with MIL-P-116, Method IA8, insuring compliance with the applicable requirements of that specification. Electrical connectors shall be protected with caps or plugs conforming to MIL-C-5501.

5.2 Packing. Packing shall be level A, B, or C as specified. (see 6.2)

5.2.1 Level A. Unless otherwise specified by the contracting activity, dummy converters packaged as specified in 5.1 shall be packed in shipping containers applicable to level A requirements of MIL-STD-2073-1. Insofar as practical, exterior shipping containers shall be of uniform shape, size minimum tare and cube consistent with the protection required.

5.2.2 Level B. Unless otherwise specified by the contracting activity, dummy converters shall be packed in shipping containers conforming to PPP-B-636, Style RSC, Type CF, Class WR, Grade V3C. Other requirements as specified in 5.2.1 are applicable.

5.2.3 level C. Unless otherwise specified by the contracting activity, dummy converters shall be packed in shipping containers conforming to PPP-B-636, Style RSC, Type CF, Class Dom, Grade 275. Other requirements as specified in 5.2.1 are applicable.

5.3 Marking. In addition to any other markings required by the contract or order (see 6.2), interior and exterior containers shall be marked in accordance with MIL-STD-129.

5.3.1 Precautionary markings. The following precautionary marking shall appear on each package.

LIFE SUPPORT ITEM
All oil, grease, shop residue or other contaminants have been removed.
DO NOT OPEN UNTIL READY FOR USE"

Delete "6.4".

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T09:33Z
Check the source to verify that this is the current version before use.

Delete "Figure 1" and add new "Figure 1".

Custodian:
AIR FORCE - 99
NAVY - AS

Review Activity:
AIR FORCE - 11

Preparing Activity:
AIR FORCE - 71

Project Number:
1660-F562

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T09:33Z
Check the source to verify that this is the current version before use.

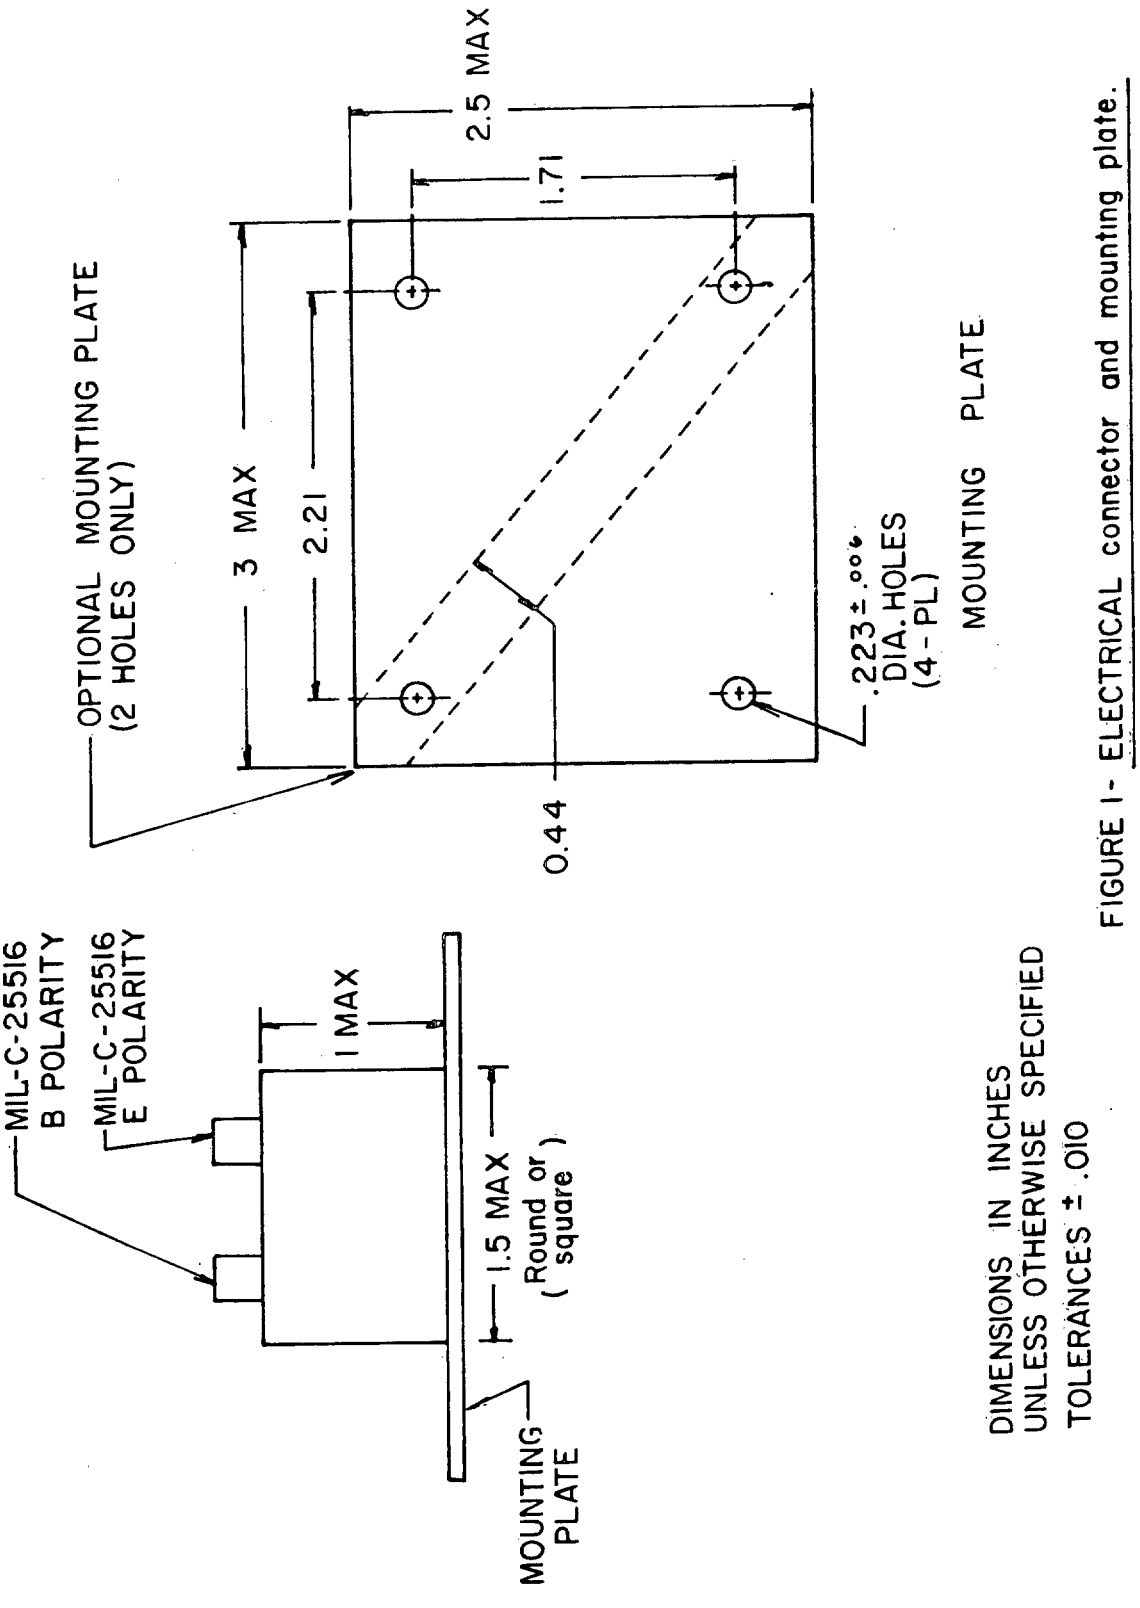


FIGURE 1 - ELECTRICAL connector and mounting plate.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T09:33Z
Check the source to verify that this is the current version before use.