INCH-POUND

MIL-I-85845/3A(AS)
14 November 1990
SUPERSEDING
MIL-I-85845/3(AS)
14 June 1988
MIL-I-22352/10(AS)
10 August 1984

MILITARY SPECIFICATION SHEET

INTERCOMMUNICATION SETS, AN/AIC-14A FILTER MODULE

This specification sheet is approved for use by the Naval Air Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the Filter Module described herein shall consist of this specification and the latest issue of MIL-I-85845.

REQUIREMENTS

Item description: The Filter Module shall provide smoothing of audio ripple present on the +27.5 volt input power to the Master Interphone Control Panel C-2645D/AIC-14A.

Item diagram: The Filter Module shall provide the functions represented schematically in accordance with the diagram of Figure 1.

Interface description: The Filter Module input and output signals will normally display the characteristics presented in Table I.

TABLE I. Signal characteristics.

Signal Name	Characteristics
Inputs: Power (PWR)	+27.5 ± 0.5 Vdc
Outputs: Filtered Power (FILT PWR)	+26.0 ± 0.5 Vdc
Grounds: Power (PWR GND)	Power return. See MIL-I-85845(AS).

AMSC N/A FSC 5831

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:30Z
Check the source to verify that this is the current version before use.

Environmental: The Filter Module shall meet the environmental requirements of MIL-I-85845 except the fluids requirement shall not apply.

Characteristics:

Performance characteristics:

Input characteristics:

Power (PWR): The Filter Module shall accept and operate within the constraints of this specification when supplied with electrical power as specified in MIL-I-85845.

Output characteristics:

Filtered Power (FILT PWR): The FILT PWR output shall have the following characteristics:

For frequencies from 300 to 7000 Hz, the FILT PWR output shall demonstrate an attenuation of ripple of 35 dB or greater for output currents from 0 to 250 milliamperes. The output voltage shall be 26.0 + 0.5 Vdc. The filter shall be capable of sustained operation at 250 ma current load without degradation of performance or damage.

Physical characteristics:

Dimensions: The Filter Module shall consist of a single encapsulated module having the dimensions of Figure 2. All outside dimensions shall be within $\pm$0.03 inch of the nominal value shown unless otherwise mentioned.

Weight: Weight of the Filter Module shall be not greater than 2.0 ounces.

Design and construction: The design and construction of the Filter Module shall be in accordance with the requirements of MIL-I-85845.

QUALITY ASSURANCE PROVISIONS: See MIL-I-85845.

Responsibility for tests and inspections: See MIL-I-85845.

Test methods:

Examination of product: See MIL-I-85845. Units procured as spares shall not be subjected to fluids inspections (see 4.2.1.10 of MIL-I-85845).

Operational test: See MIL-I-85845.

Ripple reduction: Verify the requirements herein.

Voltage drop: Verify the requirements herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:30Z
Check the source to verify that this is the current version before use.

Environmental stress screening (burn-in): An environmental stress screening inspection shall be required on all Filter Modules. Only these modules that have successfully completed the environmental stress screening inspection shall be delivered to the procuring activity. Prior to and after each submission to the screening inspection, a room ambient full electrical performance inspection shall be performed on each Filter Module. Each Filter Module shall be subjected to 10 4-hour temperature cycles consisting of a 2-hour cold period at -54°C and a 2-hour hot period at +71°C. The modules need not be energized during the temperature cycling portion of this inspection. The thermal stress screening inspection chamber's temperature change rate shall be greater than 10°C per minute.

Special tests: See MIL-I-85845.

Preparing Activity:
Navy - AS
(Project No. 5831-N082)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:30Z
Check the source to verify that this is the current version before use.


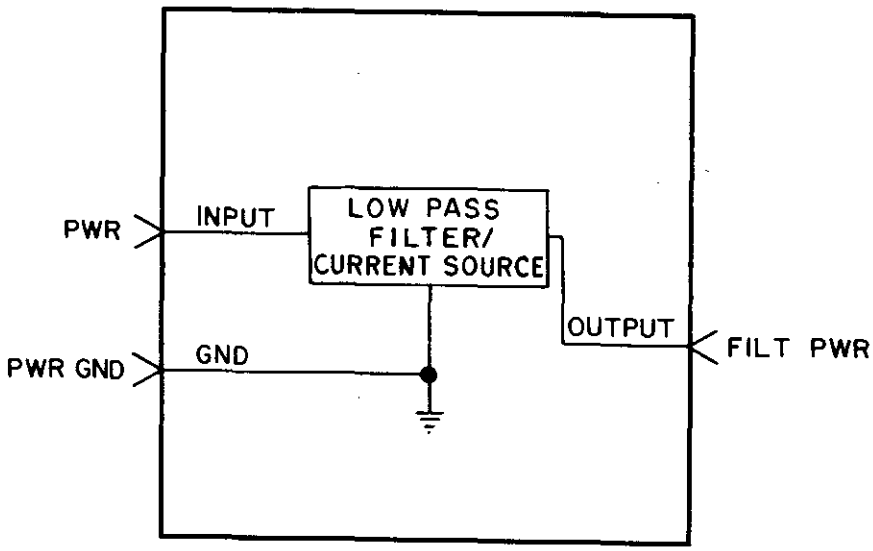


FIGURE 1. Filter module functional diagram.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:30Z
Check the source to verify that this is the current version before use.

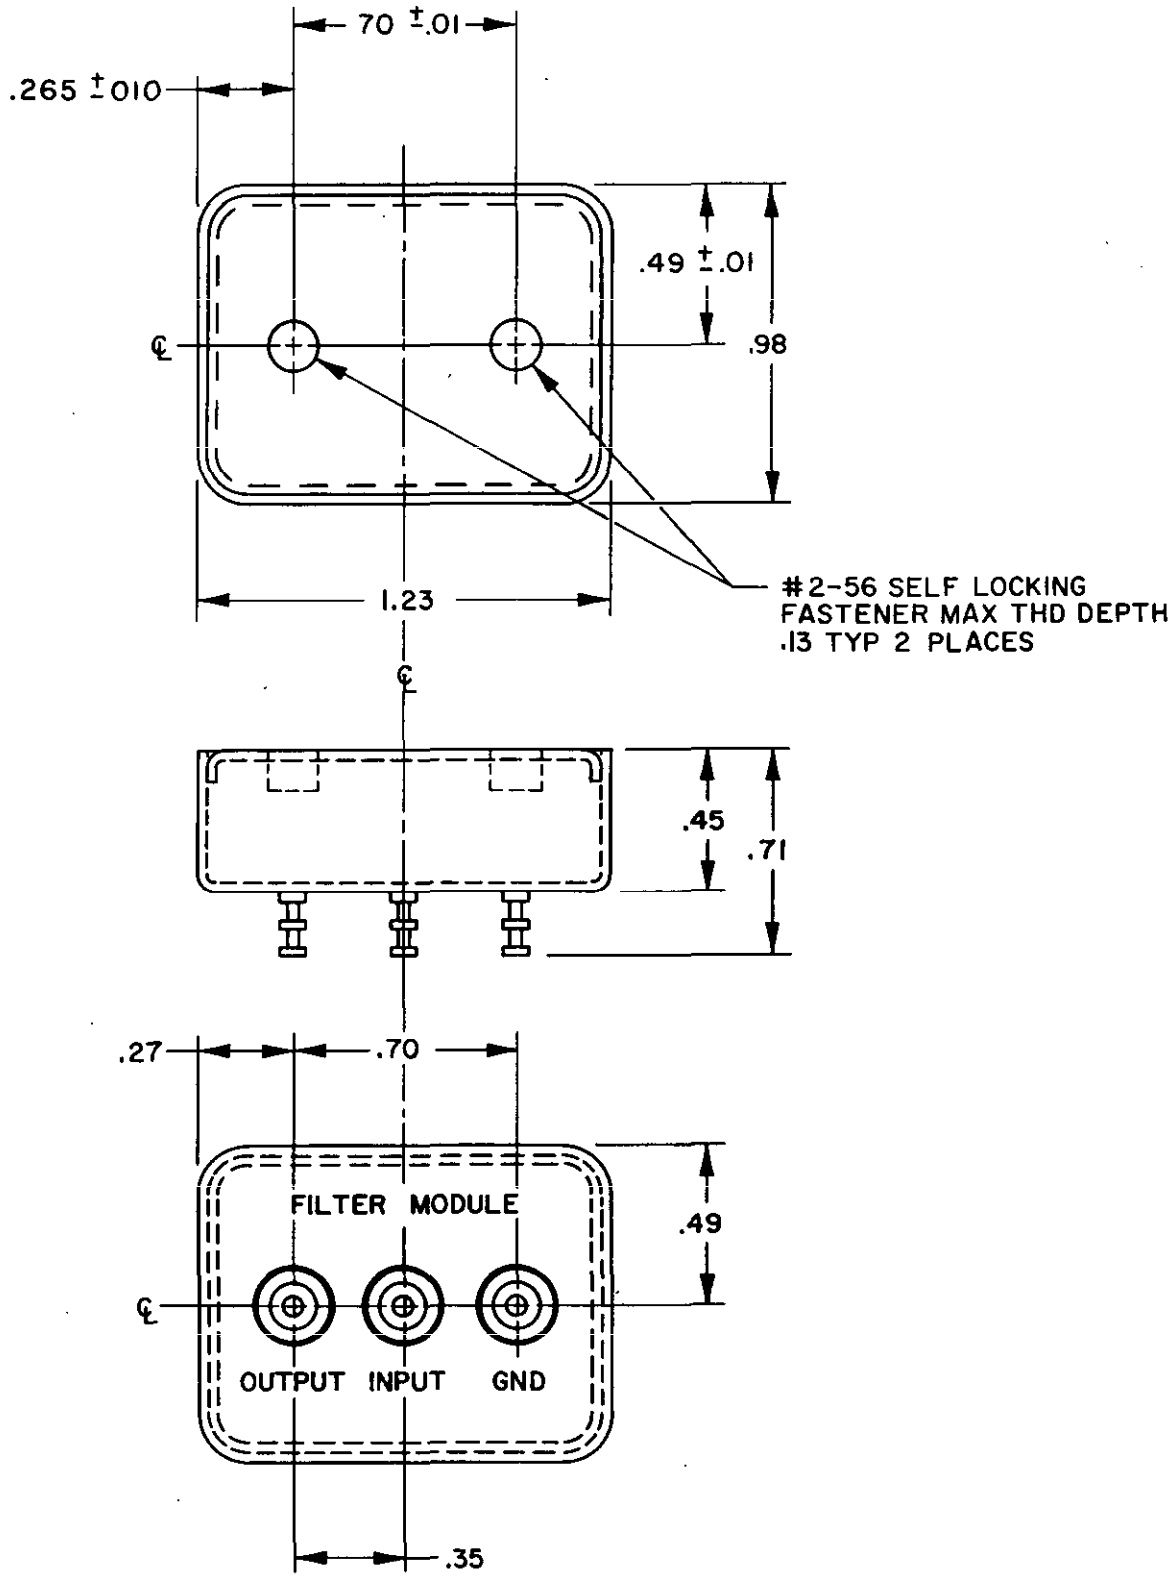

1/ All dimensions are in inches. Tolerances on dimensions are ±0.03 inches unless otherwise specified.

FIGURE 2. Filter module outline drawing.

Source: https://assist.dla.mil - Downloaded: 2026-10-23T11:30Z
Check the source to verify that this is the current version before use.