INCH-POUND
A-A-50605
10 August 1993

COMMERCIAL ITEM DESCRIPTION

EXPANSION JOINT, TFE FLUOROCARBON RESIN, CORRUGATED WITH DUCTILE IRON FLANGES

The General Services Administration has authorized the use of this commercial item description as a replacement for MIL-E-15330 which is canceled in part.

1. Abstract. This description covers TFE fluorocarbon resin expansion joints having ductile iron flanges identified as class C in MIL-E-15330. Each expansion joint shall be defined by size as indicated below.

Size designation	Inside diameter (inches nominal)	Face to face (inches +1/16)
A	1-1/2	1-3/8
B	2	1-9/16
C	3	2-1/4
D	4	2-5/8
E	6	2-3/4
F	8	4
G	10	5-1/4

2. Salient characteristics.

2.1 Configuration. The expansion joint shall consist of a molded TFE bellows, two ductile iron flanges, and not less than 3 limit bolts and monel reinforcing rings. The general configuration of the expansion joint shall be as specified on figure 1.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, Naval Sea Systems Command, SEA 03Q42, 2531 Jefferson Davis Hwy, Arlington, VA 22242-5160 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 4730

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:45Z
Check the source to verify that this is the current version before use.

2.2 Workmanship. The TFE fluorocarbon resin molding shall be free of blow holes, molding flash, cracks, and linear indications that may impede the satisfactory function of the expansion joint. The ductile iron flanges shall be free of sharp edges.

3. Quality assurance provisions.

3.1 Test pressure. All expansion joints shall be proof tested to 300 pounds per square inch (psi).

3.2 Tensile strength. The TFE fluorocarbon resin shall have a tensile strength of not less than 2300 psi when tested in accordance with ASTM D 638 with samples prepared in accordance with ASTM D 1708.

3.3 Marking. The ductile flanges shall be stamped with the following identification data:

(a) This specification number.
(b) Manufacturer's name or logo.
(c) Contract number and date.
(d) Expansion joint size.

4. Contractor certification. The contractor shall certify and maintain substantiating evidence that the product offered meets the salient characteristics of this Commercial Item Description, and that the product conforms to the producers own drawings, specifications, standards, and quality assurance practices. The government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

5. Regulatory requirements. The offeror/contractor is encouraged to use recovered materials in accordance with Public Law 94-580 to the maximum extent practicable.

6. Preservation, packaging, packing, labeling, and marking. The preservation, packaging, packing, labeling, and marking shall be as specified in the contract or order.

7. Notes. ASTM D 638 (Standard Test Method for Tensile Properties of Plastics) and ASTM D 1708 (Standard Test Method for Tensile Properties of Plastics by Use of Microtensile Specimens) are available from the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103. These documents also may be available in or through libraries or other informational services.

Preparing activity:
Navy - SH
(Project 4730-N098)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:45Z
Check the source to verify that this is the current version before use.

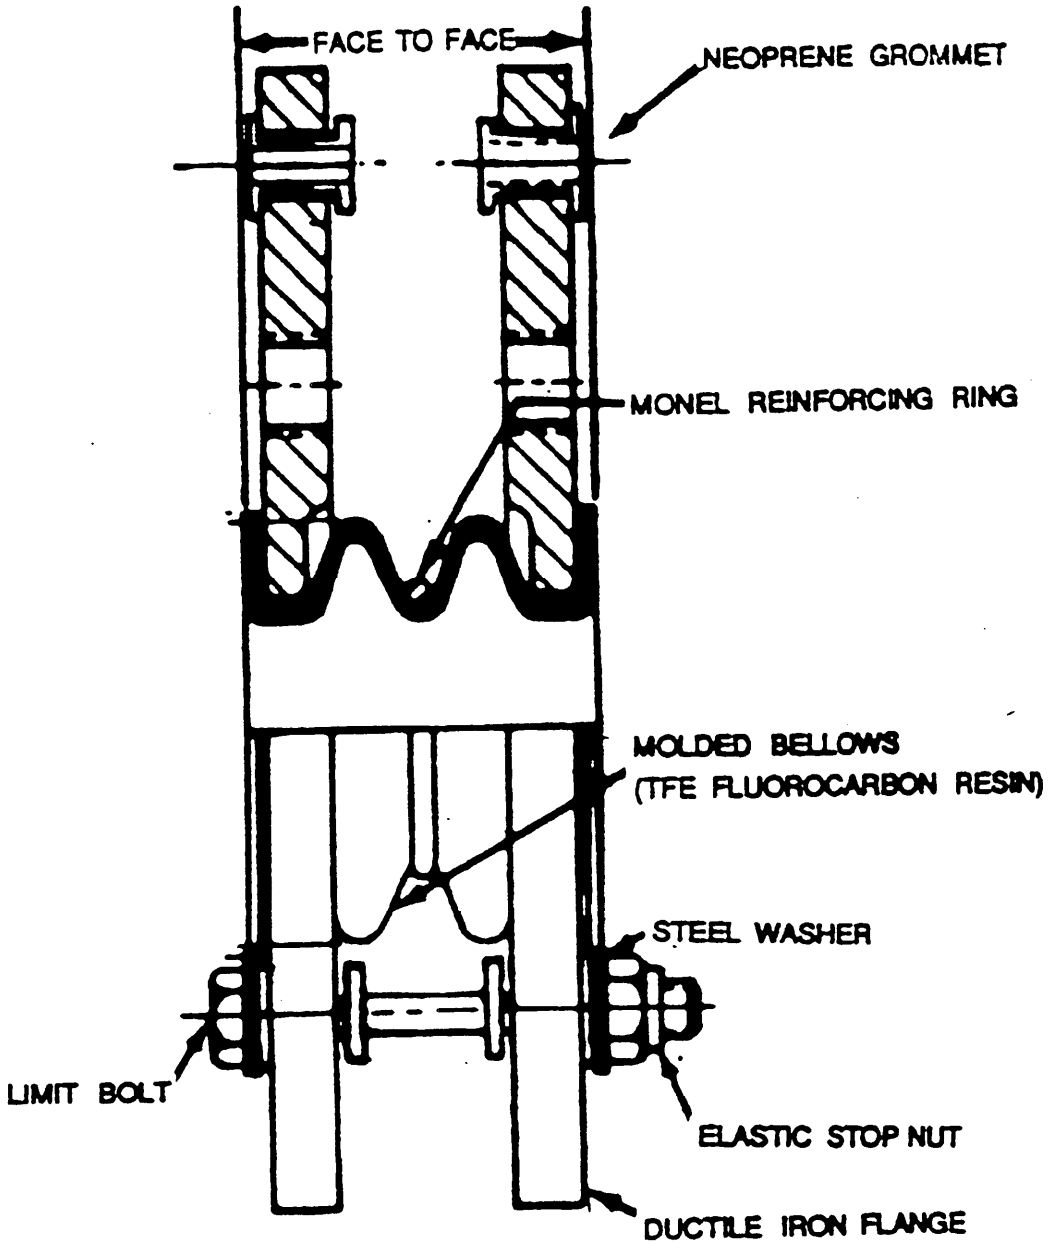


FIGURE 1. Molded TFE expansion joint.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:45Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the comment number and revision letter should be given.

2. The submitter of this form must complete blocks 4, 5, 6, and 7.

3. The preparing activity must provide a reply within 30 days from receipt of this form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER A-A-50605	2. DOCUMENT DATE (YYMMDD) 93/08/10

3. DOCUMENT TITLE
EXPANSION JOINT, TFE FLUOROCARBON RESIN, CORRUGATED WITH DUCTILE IRON FLANGES

4. NATURE OF CHANGE (identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) DSN (if applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME Technical Point of Contact (TPOC) MR. CARL BANKS, SEA 03Y23 ADDRESS ALL CORRESPONDENCE AS FOLLOWS:	b. TELEPHONE (Include Area Code) (1) Commercial: TPOC: 703-602-0367 DSN: 8-332-0367
c. ADDRESS (Include Zip Code) COMMANDER, NAVAL SEA SYSTEMS COMMAND ATTN: SEA 03Q42 31 JEFFERSON DAVIS HIGHWAY ARLINGTON, VA 22242-5160	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403 Falls Church, VA 22041-3466 Telephone 703-756-2340 DSN 289-2340

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:45Z
Check the source to verify that this is the current version before use.