MILITARY STANDARD

AUTOMATED ENGINEERING
DOCUMENT PREPARATION SYSTEM

SWITCHES, ROTARY

TO ALL HOLDERS OF DOD-STD-35-6B(MI):

1. THE FOLLOWING PAGES OF DOD-STD-35-6B(MI) HAVE BEEN REVISED AND SUPERSEDE THE PAGES LISTED:

NEW PAGE	DATE	SUPERSEDED PAGE	DATE
11	5 January 1979	(Reprinted without change)	
12	30 May 1980	12	5 January 1979
19	5 January 1979	(Reprinted without change)	
20	30 May 1980	20	5 January 1979
21	30 May 1980	21	5 January 1979
22	5 January 1979	(Reprinted without change)	
45	5 January 1979	(Reprinted without change)	
46	30 May 1980	46	5 January 1979
47	30 May 1980	47	5 January 1979
48	5 January 1979	(Reprinted without change)	
51	30 May 1980	51	5 January 1979
52	5 January 1979	(Reprinted without change)	
117	5 January 1979	(Reprinted without change)	
118	30 May 1980	118	5 January 1979
119	30 May 1980	119	5 January 1979
120	5 January 1979	(Reprinted without change)	
125	5 January 1979	(Reprinted without change)	
126	30 May 1980	126	5 January 1979
127	30 May 1980	127	5 January 1979
128	5 January 1979	(Reprinted without change)	
141	5 January 1979	(Reprinted without change)	
142	30 May 1980	142	5 January 1979
143	30 May 1980	143	5 January 1979
144	5 January 1979	(Reprinted without change)	
245	30 May 1980	245	5 January 1979
246	30 May 1980	246	5 January 1979
247	30 May 1980	247	5 January 1979

2. THE FOLLOWING PAGES HAVE BEEN ADDED:

NEW PAGE	DATE	NEW PAGE	DATE
21a	30 May 1980	21c	30 May 1980
21b	30 May 1980	21d	30 May 1980

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

NEW PAGE	DATE	NEW PAGE	DATE
220a	30 May 1980		
220b	30 May 1980	245a	30 May 1980
220c	30 May 1980	245b	30 May 1980
220d	30 May 1980	247a	30 May 1980
220e	30 May 1980	247b	30 May 1980
220f	30 May 1980	247c	30 May 1980
238a	30 May 1980	247d	30 May 1980
238b	30 May 1980	248	30 May 1980

3. RETAIN THIS NOTICE PAGE AND INSERT BEFORE THE TABLE OF CONTENTS.

4. Holders of DOD-STD-35-6B(MI) will verify that page changes and additions indicated above have been entered. The notice page will be retained as a check sheet. This issuance, together with appended pages is a separate publication. Each notice is to be retained by stocking points until the Military Standard is completely revised or canceled.

Custodian:
Army - MI

Review activities:
Army - AT
Army - AV
Army - ER
Army - ME
Army - MR
Army - SG
Army - CR

User activity:
Army - AR

Preparing activity:
Army - MI

(Project EDS-311)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

TABLE III. TABULATION CANDIDATES.

CODE	COLUMN HEADING	CODE	COLUMN HEADING	CODE	COLUMN HEADING
3528	TYPE DES	1583	ENCLOSURE	1568	NUMBER OF POLES
3530	POLE	3532	THROW	1569	NUMBER OF SECTIONS/ DECKS
1570	NUMBER OF POSITIONS PER DECK	1562	NUMBER OF POLES PER DECK	1575	INDEXING ANGLE DEGREES
2701	CURRENT CARRYING RESISTIVE DC LOAD VOLTS	2725	CURRENT CARRYING INDUCTIVE DC LOAD VOLTS	2773	CURRENT CARRYING LAMP DC LOAD VOLTS
2702	CURRENT CARRYING RESISTIVE DC LOAD AMPERES	2726	CURRENT CARRYING INDUCTIVE DC LOAD AMPERES	2774	CURRENT CARRYING LAMP DC LOAD AMPERES
2704	CURRENT CARRYING RESISTIVE AC LOAD FREQUENCY HERTZ	2728	CURRENT CARRYING INDUCTIVE AC LOAD FREQUENCY HERTZ	2776	CURRENT CARRYING LAMP AC LOAD FREQUENCY HERTZ
2705	CURRENT CARRYING RESISTIVE AC LOAD AMPERES	2729	CURRENT CARRYING INDUCTIVE AC LOAD AMPERES	2777	CURRENT CARRYING LAMP AC LOAD AMPERES
2703	CURRENT CARRYING RESISTIVE AC LOAD VOLTS	2727	CURRENT CARRYING INDUCTIVE AC LOAD VOLTS	2775	CURRENT CARRYING LAMP AC LOAD VOLTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

Reprinted without change

TABLE III. TABULATION CANDIDATES. (CONT)

CODE	COLUMN HEADING	CODE	COLUMN HEADING	CODE	COLUMN HEADING
2502	MAKE AND BREAK RESISTIVE DC LOAD VOLTS	2526	MAKE AND BREAK INDUCTIVE DC LOAD VOLTS	2574	MAKE AND BREAK LAMP DC LOAD VOLTS
2503	MAKE AND BREAK RESISTIVE DC LOAD AMPERES	2527	MAKE AND BREAK INDUCTIVE DC LOAD AMPERES	2575	MAKE AND BREAK LAMP DC LOAD AMPERES
2504	MAKE AND BREAK RESISTIVE AC LOAD VOLTS	2528	MAKE AND BREAK INDUCTIVE AC LOAD VOLTS	2576	MAKE AND BREAK LAMP AC LOAD VOLTS
2505	MAKE AND BREAK RESISTIVE AC LOAD FREQUENCY HERTZ	2529	MAKE AND BREAK INDUCTIVE AC LOAD FREQUENCY HERTZ	2577	MAKE AND BREAK LAMP AC LOAD FREQUENCY HERTZ
2506	MAKE AND BREAK RESISTIVE AC LOAD AMPERES	2530	MAKE AND BREAK INDUCTIVE AC LOAD AMPERES	2578	MAKE AND BREAK LAMP AC LOAD AMPERES
1571	STOPS				

Source: https://assist.dla.mil -- Downloaded: 202640-23T20:53Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	TEMPERATURE RATING.
5069	THE MAXIMUM OPERATING TEMPERATURE RATING SHALL BE 5069 DEGREES CELSIUS.
5071	THE MAXIMUM NONOPERATING TEMPERATURE RATING SHALL BE 5071 DEGREES CELSIUS.
7302	THE MAXIMUM STORAGE TEMPERATURE RATING SHALL BE 7302 DEGREES CELSIUS.
4905	THE MAXIMUM SERVICE TEMPERATURE RATING SHALL BE 4905 DEGREES CELSIUS.
5054	THE MAXIMUM AMBIENT OPERATING TEMPERATURE RATING SHALL BE 5054 DEGREES CELSIUS.
5068	THE MINIMUM OPERATING TEMPERATURE RATING SHALL BE 5068 DEGREES CELSIUS.
5070	THE MINIMUM NONOPERATING TEMPERATURE RATING SHALL BE 5070 DEGREES CELSIUS.
7301	THE MINIMUM STORAGE TEMPERATURE RATING SHALL BE 7301 DEGREES CELSIUS.
4904	THE MINIMUM SERVICE TEMPERATURE RATING SHALL BE 4904 DEGREES CELSIUS.
5052	THE MINIMUM AMBIENT OPERATING TEMPERATURE RATING SHALL BE 5052 DEGREES CELSIUS.
5046	THE NOMINAL OPERATING TEMPERATURE RATING SHALL BE 5046 DEGREES CELSIUS.
5048	THE NOMINAL STORAGE TEMPERATURE RATING SHALL BE 5048 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.
Reprinted without change

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CURRENT RATING	
MINIMUM CURRENT (SELECT ONE)	
(AMPERES)	7591
(MILLIAMPERES)	7592
MAXIMUM CURRENT (SELECT ONE)	
(AMPERES)	7594
(MILLIAMPERES)	7595
NOMINAL CURRENT (SELECT ONE)	
(AMPERES)	7597
(MILLIAMPERES)	7598
POWER RATING	
MINIMUM POWER (SELECT ONE)	
(WATTS)	7631
(KILOWATTS)	7632
(MILLIWATTS)	7633
(VOLTAMPERES)	7645
MAXIMUM POWER (SELECT ONE)	
(WATTS)	7634
(KILOWATTS)	7635
(MILLIWATTS)	7636
(VOLTAMPERES)	7646

Source: https://assist.dla.mil Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

CURRENT RATING.

7591 THE MINIMUM CURRENT RATING SHALL BE 7591 AMPERE(S).

7592 THE MINIMUM CURRENT RATING SHALL BE 7592 MILLIAMPERE(S).

7594 THE MAXIMUM CURRENT RATING SHALL BE 7594 AMPERE(S).

7595 THE MAXIMUM CURRENT RATING SHALL BE 7595 MILLIAMPERE(S).

7597 THE NOMINAL CURRENT RATING SHALL BE 7597 AMPERE(S).

7598 THE NOMINAL CURRENT RATING SHALL BE 7598 MILLIAMPERE(S).

7631 THE MINIMUM POWER RATING SHALL BE 7631 WATT(S).

7632 THE MINIMUM POWER RATING SHALL BE 7632 KILOWATT(S).

7633 THE MINIMUM POWER RATING SHALL BE 7633 MILLIWATT(S).

7645 THE MINIMUM POWER RATING SHALL BE 7645 VOLTAMPERE(S).

7634 THE MAXIMUM POWER RATING SHALL BE 7634 WATT(S).

7635 THE MAXIMUM POWER RATING SHALL BE 7635 KILOWATT(S).

7636 THE MAXIMUM POWER RATING SHALL BE 7636 MILLIWATT(S).

7646 THE MAXIMUM POWER RATING SHALL BE 7646 VOLTAMPERE(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
POWER RATING (CONT)	
NOMINAL POWER (SELECT ONE)	
(WATTS)	7637
(KILOWATTS)	7638
(MILLIWATTS)	7639
(VOLTAMPERES)	7647
VOLTAGE RATING	
MINIMUM VOLTAGE	
VOLTS	
(VOLTS AC)	7600
(VOLTS DC)	7601
(VOLTS RMS)	7602
MAXIMUM VOLTAGE	
VOLTS	
(VOLTS AC)	7609
(VOLTS DC)	7610
(VOLTS RMS)	7611

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

New page

CHAR CODE	STANDARD PARAGRAPH
7637	THE NOMINAL POWER RATING SHALL BE 7637 WATT(S).
7638	THE NOMINAL POWER RATING SHALL BE 7638 KILOWATT(S).
7639	THE NOMINAL POWER RATING SHALL BE 7639 MILLIWATT(S).
7647	THE NOMINAL POWER RATING SHALL BE 7647 VOLTAMPERE(S).
	VOLTAGE RATING.
7600	THE MINIMUM VOLTAGE RATING SHALL BE 7600 VOLT(S) AC.
7601	THE MINIMUM VOLTAGE RATING SHALL BE 7601 VOLT(S) DC.
7602	THE MINIMUM VOLTAGE RATING SHALL BE 7602 VOLT(S) RMS.
7609	THE MAXIMUM VOLTAGE RATING SHALL BE 7609 VOLT(S) AC.
7610	THE MAXIMUM VOLTAGE RATING SHALL BE 7610 VOLT(S) DC.
7611	THE MAXIMUM VOLTAGE RATING SHALL BE 7611 VOLT(S) RMS.

New page

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VOLTAGE RATING (CONT)	
NOMINAL VOLTAGE	
VOLTS	
(VOLTS AC)	7618
(VOLTS DC)	7619
(VOLTS RMS)	7620
ALTITUDE RATING	
OPERATING (SELECT ONE)	
SEA LEVEL TO (FEET)	5060
SEA LEVEL TO (METERS)	5061
NONOPERATING (SELECT ONE)	
SEA LEVEL TO (FEET)	5062
SEA LEVEL TO (METERS)	5063
CLASSIFICATION	
TYPE DESIGNATION	
PER BASE DOCUMENT	
STYLE (DESIGNATION)	3500

Source: https://assist.dla.mil -- Downloaded: 202610-23T20:53Z
Check the source to verify that this is the current version before use.

New page

CHAR CODE | STANDARD PARAGRAPH

7618 THE NOMINAL VOLTAGE RATING SHALL BE 7618 VOLT(S) AC.

7619 THE NOMINAL VOLTAGE RATING SHALL BE 7619 VOLT(S) DC.

7620 THE NOMINAL VOLTAGE RATING SHALL BE 7620 VOLT(S) RMS.

ALTITUDE RATING.

5060 THE OPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5060 FEET.

5061 THE OPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5061 METERS.

5062 THE NONOPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5062.

5063 THE NONOPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5063 METERS.

TYPE DESIGNATION.

3500 THE ITEM(S) STYLE SHALL BE 3500 IN ACCORDANCE WITH THE BASE DOCUMENT.

New page

Source: https://assist.dla.mil Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CLASSIFICATION (CONT)	
PER BASE DOCUMENT (CONT)	
CONSTRUCTION (DESIGNATION)	3502
TEMPERATURE-LIFE CHARACTERISTIC (DESIGNATION)	3504
VIBRATION GRADE (DESIGNATION)	3506
SHOCK TYPE (DESIGNATION)	3508
ALTITUDE (DESIGNATION)	3510
INSULATION (DESIGNATION)	3512
CLASS (DESIGNATION)	3514
SWITCHING CHARACTERISTIC (DESIGNATION)	3516
MOUNTING, CONNECTION AND HANDLE ARRANGEMENT (DESIGNATION)	3518
ROTOR (DESIGNATION)	3520
POSITION (DESIGNATION)	3522

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

Reprinted without change

CHAR CODE	STANDARD PARAGRAPH
1603	SOLENOID COIL CURRENT. THE SOLENOID COIL CURRENT SHALL BE 1603 AMPERE(S).
1616	SOLENOID COIL CURRENT. THE SOLENOID COIL CURRENT SHALL BE 1616 MILLIAMPERE(S).
1601	SOLENOID COIL VOLTAGE. THE SOLENOID COIL VOLTAGE SHALL BE 1601 VOLTS, AC.
1602	SOLENOID COIL VOLTAGE. THE SOLENOID COIL VOLTAGE SHALL BE 1602 VOLTS, DC.
1620	SOLENOID COIL RESISTANCE. THE SOLENOID COIL RESISTANCE SHALL BE 1620 OHMS.
1605	TERMINATION. TERMINALS SHALL BE TYPE 1605 AS SPECIFIED IN ILLUSTRATION 012-11-3. SOLDER TAB.
1606	SOLDER TAB TERMINALS SHALL ACCOMMODATE 1606 WIRES.
1607	THE ACCOMMODATED WIRE SIZE SHALL BE 1607 AWG.
1622	THE ACCOMMODATED WIRE SIZE SHALL BE 1622 MILLIMETERS, DIAMETER.

Source: https://assist.dla.mil -- Downloaded: 202610-23T20:53Z
Check the source to verify that this is the current version before use.
Reprinted without change

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
WIRE ACCOMMODATION (CONT)	
ANGLE TERMINALS BENT TO REAR (DEGREES)	1608
ANGLE TERMINALS BENT TO FRONT (DEGREES)	1609
QUICK DISCONNECT SIZE	
SIZE ____	1611
CONNECTOR	
(PART NUMBER)	1613
DOCUMENT (DOC DES)	1614
MATE WITH ____	1615
WIRE LEAD	
WIRE SIZE (SELECT ONE)	
(AWG)	1619
(MILLIMETERS, DIAMETER)	1626
DOCUMENT (DOC DES)	1628
DETENT MECHANISM	
(SPECIFY)	1624
OPERATING SHAFT END STYLE	
(SPECIFY)	1630
KEY OPERATED.	1632

Source: https://assist.dla.mil -- Downloaded: 202610-23T20:53Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

1608 ANGLE TERMINALS SHALL BE BENT TO THE REAR 1608 DEGREES.

1609 ANGLE TERMINALS SHALL BE BENT TO THE FRONT 1609 DEGREES.

1611 QUICK DISCONNECT SIZE. THE QUICK DISCONNECT SIZE SHALL BE 1611.

CONNECTOR.

1613 THE CONNECTOR PART NUMBER SHALL BE 1613.

1614 THE CONNECTOR SHALL BE IN ACCORDANCE WITH 1614.

1615 THE CONNECTOR SHALL MATE WITH 1615.

1619 THE WIRE LEAD WIRE SIZE SHALL BE 1619 AWG.

1626 THE WIRE LEAD WIRE SIZE SHALL BE 1626 MILLIMETERS, DIAMETER.

1628 THE WIRE LEAD WIRE SHALL BE IN ACCORDANCE WITH 1628.

1624 DETENT MECHANISM. THE DETENT MECHANISM SHALL BE 1624.

1630 OPERATING SHAFT END STYLE. THE OPERATING SHAFT END STYLE SHALL BE 1630.

1632 KEY OPERATED. THE SWITCH SHALL BE KEY OPERATED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TRUTH TABLE	
NOTE: SEE TRUTH TABLE.	

Reprinted without change
Source: https://assist.dla.mil -- Downloaded: 202610-23T20:53Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

TRUTH TABLE (CONT)

READOUT

SYMBOL

	3204	3205	3206	3207	3208	3209	3210	3211	3212	3213	3214
	3215	3216	3217	3218	3219	3220	3221	3222	3223	3224	3225
	3226	3227	3228	3229	3230	3231	3232	3233	3234	3235	3236
	3237	3238	3239	3240	3241	3242	3243	3244	3245	3246	3247
	3248	3249	3250	3251	3252	3253	3254	3255	3256	3257	3258
	3259	3260	3261	3262	3263	3264	3265	3266	3267	3268	3269
	3270	3271	3272	3273	3274	3275	3276	3277	3278	3279	3280
	3281	3282	3283	3284	3285	3286	3287	3288	3289	3290	3291
	3292	3293	3294	3295	3296	3297	3298	3299	3300	3301	3302
	3303	3304	3305	3306	3307	3308	3309	3310	3311	3312	3313
	3314	3315	3316	3317	3318	3319	3320	3321	3322	3323	3324
	3325	3326	3327	3328	3329	3330	3331	3332	3333	3334	3335
	3336	3337	3338	3339	3340	3341	3342	3343	3344	3345	3346
	3347	3348	3349	3350	3351	3352	3353	3354	3355	3356	3357
	3358	3359	3360	3361	3362	3363	3364	3365	3366	3367	3368
	3369	3370	3371	3372	3373	3374	3375	3376	3377	3378	3379
	3380	3381	3382	3383	3384	3385	3386	3387	3388	3389	3390

NOTE: 3391.
NOTE: 3392.
NOTE: 3393.
NOTE: 3394.
NOTE: 3395.
NOTE: 3396.
NOTE: 3397.
NOTE: 3398.

Source: https://assist.dla.mil - Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
WEIGHT	
MAXIMUM WEIGHT PER UNIT (SELECT ONE)	
U.S. (SELECT ONE)	
(OUNCES)	7022
(POUNDS)	7023
SI (SELECT ONE)	
(GRAMS)	7021
(KILOGRAMS)	7024
NOMINAL WEIGHT PER UNIT (SELECT ONE)	
U.S. (SELECT ONE)	
(OUNCES)	6996
(POUNDS)	6997
SI (SELECT ONE)	
(GRAMS)	6998
(KILOGRAMS)	6999

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check this source to verify that this is the current version before use.
Reprinted without change

CHAR CODE	STANDARD PARAGRAPH
1719	LIFE (ROTATIONAL) AT SEA LEVEL. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1719.
2150	LIFE (ROTATIONAL) AT SEA LEVEL. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2152	THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
	THE CHANGE IN ROTATIONAL TORQUE SHALL BE NOT GREATER THAN THE FOLLOWING:
2154	PLUS 2154 PERCENT.
2156	MINUS 2156 PERCENT.
2158	THERE SHALL BE NO EVIDENCE OF INTERMITTANT OPERATION.
2160	THERE SHALL BE NO LOOSE PARTS.
1721	THE CONTACT RESISTANCE SHALL BE NOT GREATER THAN 1721 MILLIOHMS.
1722	THE INSULATION RESISTANCE SHALL BE NOT LESS THAN 1722 MEGOHMS.
1711	LIFE (ROTATIONAL) AT SEA LEVEL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1711.
2162	LIFE (ROTATIONAL) AT SEA LEVEL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-STD-202, METHOD 206.

Source: https://assist.dla.mil -- Downloaded: 2024-10-23T20:53Z
Check the source to verify that this is the current version before use.
Reprinted without change

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
LIFE (ROTATIONAL) AT SEA LEVEL (CONT)	
PER MIL-STD-202, METHOD 206. (CONT)	
NUMBER OF CYCLES (SELECT ONE)	
TEST CONDITION (LETTER)	1712
(QUANTITY)	2164
CYCLE RATE (CYCLES PER MINUTE)	1714
TEST VOLTAGE (SELECT ONE)	
(PERCENT OF RATED VOLTAGE)	2166
(VOLTS, AC)	2168
(VOLTS, DC)	2170
LOAD (SELECT ONE)	
(PERCENT OF RATED LOAD)	2172
(AMPERES)	2174
(MILLIAMPERES)	2176
TEST TEMPERATURE (DEGREES CELSIUS)	1713
METHOD OF MOUNTING.	2178
EACH CYCLE SHALL CONSIST OF _____.	1715
MEASUREMENTS BEFORE AND AFTER TEST SHALL BE ____.	1717

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1712	TEST CONDITION LETTER 1712 SHALL APPLY.
2164	THERE SHALL BE 2164 CYCLES.
1714	THE CYCLE RATE SHALL BE 1714 CYCLES PER MINUTE.
2166	THE TEST VOLTAGE SHALL BE 2166 PERCENT OF THE RATED VOLTAGE.
2168	THE TEST VOLTAGE SHALL BE 2168 VOLTS, AC.
2170	THE TEST VOLTAGE SHALL BE 2170 VOLTS, DC.
2172	THE TEST LOAD SHALL BE 2172 PERCENT OF THE RATED LOAD.
2174	THE TEST LOAD SHALL BE 2174 AMPERE(S).
2176	THE TEST LOAD SHALL BE 2176 MILLIAMPERE(S).
1713	THE TEST TEMPERATURE SHALL BE 1713 DEGREES CELSIUS.
2178	THE METHOD OF MOUNTING SHALL BE 2178.
1715	EACH CYCLE SHALL CONSIST OF 1715.
1717	MEASUREMENTS BEFORE AND AFTER TEST SHALL BE 1717.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
LIFE, LOW LEVEL SWITCHING AT REDUCED BAROMETRIC PRESSURE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2180
AS FOLLOWS:	2182
"MISSES" ALLOWED (QUANTITY)	2184
MAXIMUM CONTACT RESISTANCE (SELECT ONE)	
(OHMS)	2186
(MILLIOHMS)	2188
MAXIMUM CONTACT VOLTAGE DROP (SELECT ONE)	
(VOLTS)	2190
(MILLIVOLTS)	2192
REMAIN WITHIN SPECIFIED TOLERANCES.	2194
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2200

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.
Reprinted without change

CHAR CODE	STANDARD PARAGRAPH
2222	THE TEST CYCLE RATE SHALL BE 2222 CYCLES PER MINUTE.
2224	THE PLUS CYCLE RATE TOLERANCE SHALL BE 2224 CYCLES PER MINUTE.
2226	THE MINUS CYCLE RATE TOLERANCE SHALL BE 2226 CYCLES PER MINUTE.
2230	LIFE, LOW LEVEL SWITCHING AT SEA LEVEL. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2230.
2232	LIFE, LOW LEVEL SWITCHING AT SEA LEVEL. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2234	THERE SHALL BE 2234 'MISS(S)' ALLOWED.
2236	THE CONTACT RESISTANCE SHALL BE NOT GREATER THAN 2236 OHM(S).
2238	THE CONTACT RESISTANCE SHALL BE NOT GREATER THAN 2238 MILLIOHMS.
2240	THE CLOSED CONTACTS VOLTAGE DROP SHALL BE NOT GREATER THAN 2240 VOLT(S).
2242	THE CLOSED CONTACTS VOLTAGE DROP SHALL BE NOT GREATER THAN 2242 MILLIVOLTS.
2244	THE ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

Reprinted without change

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
LIFE, LOW LEVEL SWITCHING AT SEA LEVEL (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2250
PER MIL-STD-202, METHOD 311.	2252
MAXIMUM LOAD CURRENT (SELECT ONE)	
(AMPERES)	2254
(MILLIAMPERES)	2256
MAXIMUM LOAD VOLTAGE (SELECT ONE)	
(VOLTS, DC)	2258
(MILLIVOLTS, DC)	2260
(VOLTS, AC)	2262
(MILLIVOLTS, AC)	2264
CONTACTS SHALL BE MONITORED FOR STICKING.	2266
CONTACTS SHALL NOT BE MONITORED FOR STICKING.	2267
TEST CYCLES (QUANTITY)	2268
ENVIRONMENTAL CONDITIONS SHALL BE ____	2269

Source: https://assist.dla.mil -- Downloaded: 202610-23T20:53Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2250	LIFE, LOW LEVEL SWITCHING AT SEA LEVEL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2250.
2252	LIFE, LOW LEVEL SWITCHING AT SEA LEVEL. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 311 OF MIL-STD-202.
2254	THE LOAD CURRENT SHALL BE NOT GREATER THAN 2254 AMPERE(S).
2256	THE LOAD CURRENT SHALL BE NOT GREATER THAN 2256 MILLIAMPERE(S).
2258	THE LOAD VOLTAGE SHALL BE NOT GREATER THAN 2258 VOLT(S), DC.
2260	THE LOAD VOLTAGE SHALL BE NOT GREATER THAN 2260 MILLIVOLTS, DC.
2262	THE LOAD VOLTAGE SHALL BE NOT GREATER THAN 2262 VOLT(S), AC.
2264	THE LOAD VOLTAGE SHALL BE NOT GREATER THAN 2264 MILLIVOLT(S), AC
2266	CONTACTS SHALL BE MONITORED FOR STICKING.
2267	CONTACTS SHALL NOT BE MONITORED FOR STICKING.
2268	THERE SHALL BE 2268 TEST CYCLES.
2269	ENVIRONMENTAL CONDITIONS SHALL BE 2269.

Source: https://assist.dla.mil/ Downloaded: 202610-23T20:53Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
LIFE, LOW LEVEL SWITCHING AT SEA LEVEL (CONT)	
PER MIL-STD-202, METHOD 311. (CONT)	
TEST CYCLE RATE (CYCLES PER MINUTE)	2270
PLUS CYCLE RATE TOLERANCE (CYCLES PER MINUTE)	2272
MINUS CYCLE RATE TOLERANCE (CYCLES PER MINUTE)	2274
MOISTURE RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1400
NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.	1396
REMAIN WITHIN SPECIFIED TOLERANCE.	1398
NO EVIDENCE OF ARCING, FLASHOVER, OR INSULATION BREAKDOWN WHEN DWV APPLIED.	1394
MAXIMUM LEAKAGE AT HIGH HUMIDITY (MILLIAMPERES)	1429
MAXIMUM LEAKAGE AFTER DRYING (MILLIAMPERES)	1404

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

Reprinted without change

CHAR CODE	STANDARD PARAGRAPH
4829	RESISTANCE TO SOLVENTS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4829.
4839	RESISTANCE TO SOLVENTS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 215 OF MIL-STD-202. THE SPECIMENS SHALL BE DIVIDED INTO GROUPS OF EQUAL NUMBER TO THE EXTENT POSSIBLE.
4838	IN ADDITION TO THE SPECIFIED SOLVENT(S), 4838 SHALL ALSO BE USED.
4835	BRUSHING SHALL BE PERFORMED WITH THE SOLVENT(S) IN ACCORDANCE WITH METHOD OF 215 OF MIL-STD-202, EXCEPT THAT SOLUTION(S) 4835 SHALL NOT BE USED.
4831	THE MARKING AREA SHALL BE BRUSHED.
6279	THE ENTIRE SURFACE SHALL BE BRUSHED.
2320	ROTATIONAL TORQUE/OPERATING FORCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2320.
2322	ROTATIONAL TORQUE/OPERATING FORCE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

Source: https://assist.dla.mil Downloaded: 202610-23T20:53Z
Check the source to verify that this is the current version before use.
Reprinted without change

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ROTATIONAL TORQUE/OPERATING FORCE (CONT)	
AS FOLLOWS: (CONT)	
MAXIMUM TORQUE (SELECT ONE)	
(POUND-INCHES)	2324
(NEWTON METERS)	2326
(OUNCE-INCHES)	2330
MINIMUM TORQUE (SELECT ONE)	
(POUND-INCHES)	2325
(NEWTON METERS)	2327
(OUNCE-INCHES)	2329
OPERATING FORCE	
MINIMUM (SELECT ONE)	
(NEWTONS)	2328
(OUNCES)	2332
(POUNDS)	2334
MAXIMUM (SELECT ONE)	
(NEWTONS)	2336
(POUNDS)	2342
(OUNCES)	2340
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2344

Source: https://assist.dla.mil -- Downloaded: 202610-23T20:53Z
Check the source to verify that this is the current version before use.


CHAR CODE	STANDARD PARAGRAPH
2324	ROTATIONAL TORQUE SHALL BE NOT GREATER THAN 2324 POUND-INCH(S).
2326	ROTATIONAL TORQUE SHALL BE NOT GREATER THAN 2326 NEWTON METER(S).
2330	ROTATIONAL TORQUE SHALL BE NOT GREATER THAN 2330 OUNCE-INCH(S).
2325	ROTATIONAL TORQUE SHALL BE NOT LESS THAN 2325 POUND-INCH(S).
2327	ROTATIONAL TORQUE SHALL BE NOT LESS THAN 2327 NEWTON METER(S).
2329	ROTATIONAL TORQUE SHALL BE NOT LESS THAN 2329 OUNCE-INCH(S).
2328	OPERATING FORCE SHALL BE NOT LESS THAN 2328 NEWTON(S).
2332	OPERATING FORCE SHALL BE NOT LESS THAN 2332 OUNCE(S).
2334	OPERATING FORCE SHALL BE NOT LESS THAN 2334 POUND(S).
2336	OPERATING FORCE SHALL BE NOT GREATER THAN 2336 NEWTON(S).
2342	OPERATING FORCE SHALL BE NOT GREATER THAN 2342 POUND(S).
2340	OPERATING FORCE SHALL BE NOT GREATER THAN 2340 OUNCE(S).
2344	ROTATIONAL TORQUE/OPERATING FORCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2344.

Source: https://assist.dla.mil -- Downloaded: 202640-23T20:53Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ROTATIONAL TORQUE/OPERATING FORCE (CONT)	
TEST METHODS (CONT)	
PER DOCUMENT (DOC DES)	2346
LOW TEMPERATURE TEST TEMPERATURE (DEGREES CELSIUS)	2348
LOW TEMPERATURE TEST DURATION (HOURS)	2350
ROOM TEMPERATURE TEST TEMPERATURE (DEGREES CELSIUS)	2352
SALT SPRAY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4878
NO EVIDENCE OF CORROSION, PHYSICAL DAMAGE, OR DEGRADATION OF PERFORMANCE.	4782
MAXIMUM CONTACT RESISTANCE (MILLIOHMS)	2354
MINIMUM INSULATION RESISTANCE (MEGOHMS)	2356


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.
Reprinted without change

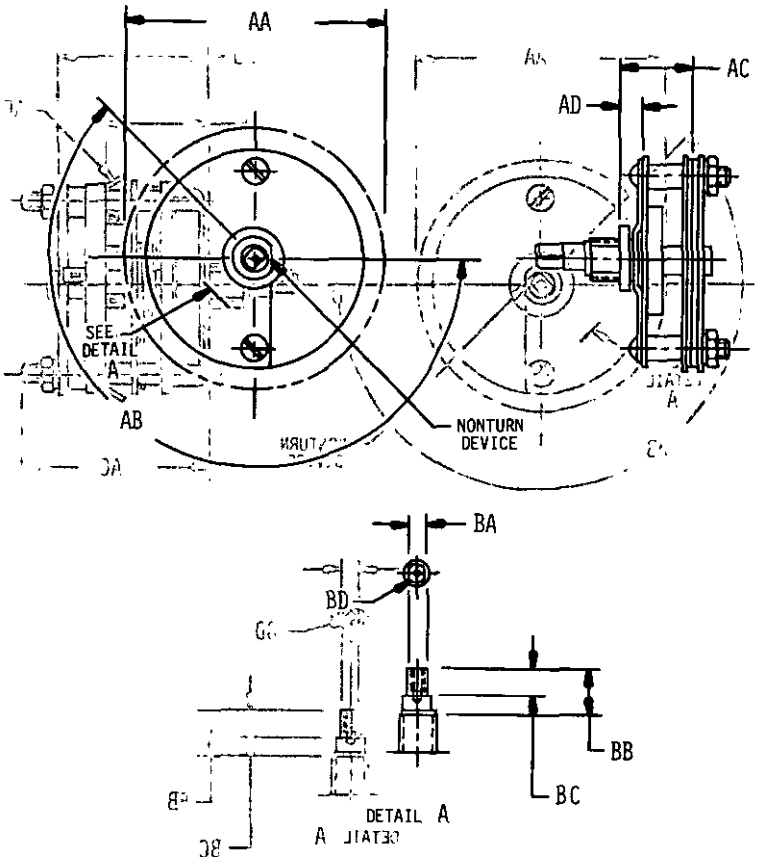

012-01-18

New page


Source: https://assist.dla.mil - Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

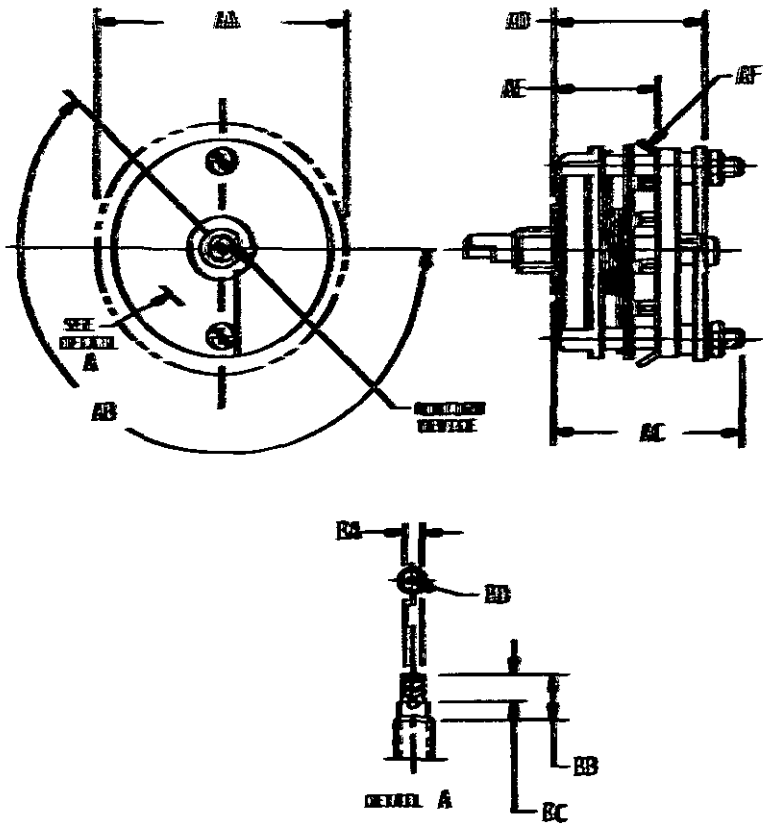


012-01-19

New page

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

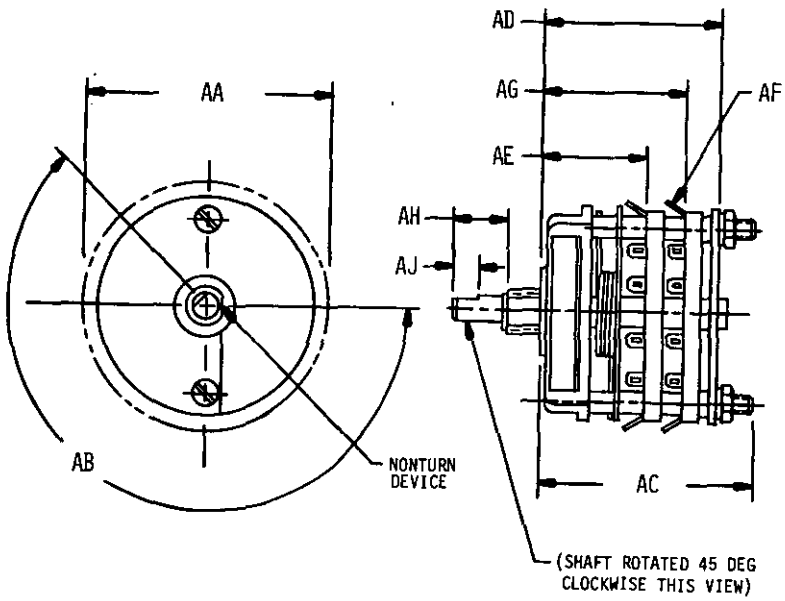


012-01-20

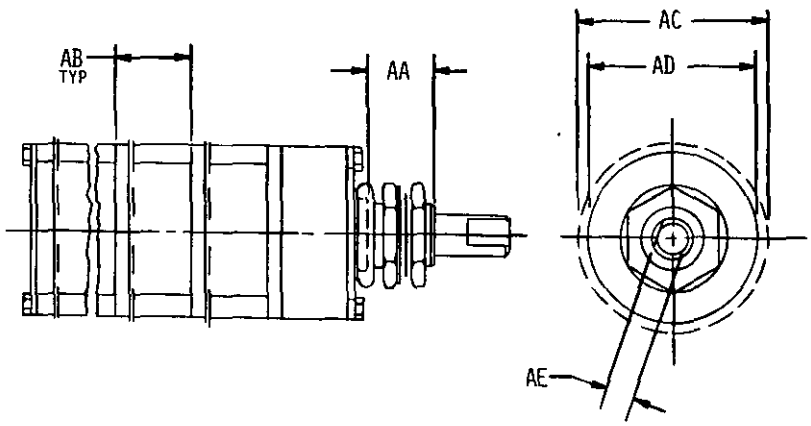

012-01-23

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.


New page

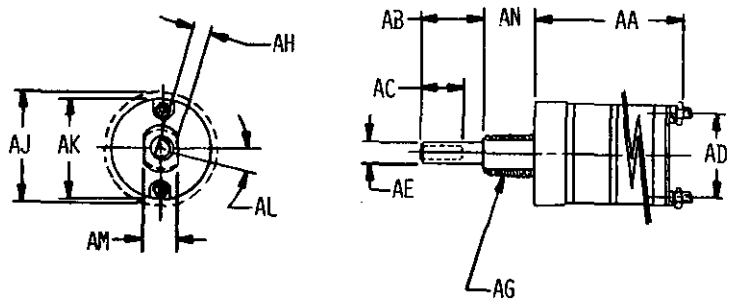

Ø12-Ø1-24

Source: https://assist.dla.mil -- Downloaded: 202640-23T20:53Z
Check the source to verify that this is the current version before use.


New page

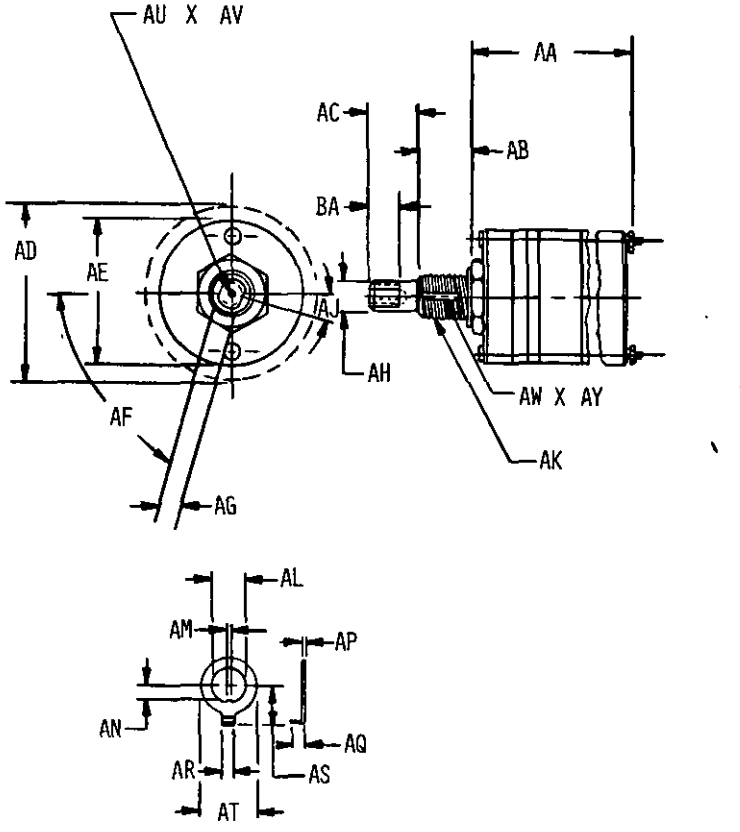

012-01-25

New page


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

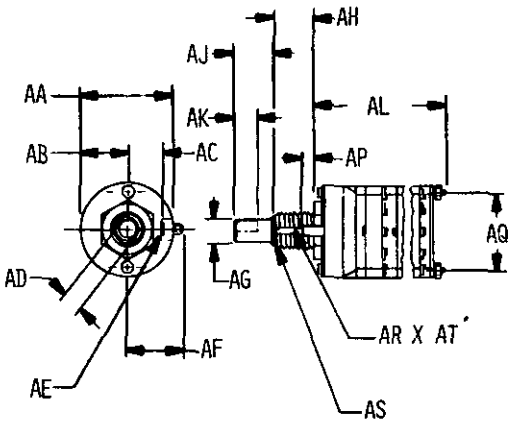

012-01-26

New page


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

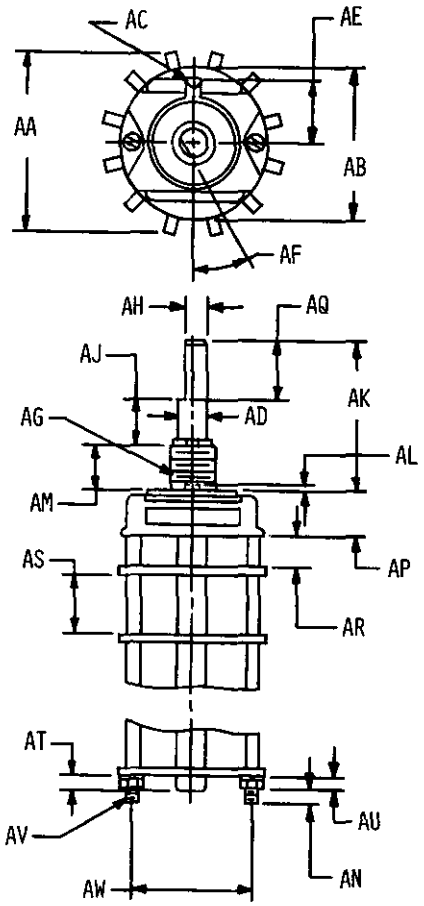

Ø12-Ø6-1Ø

New page


Source: https://assist.dla.mil -- Downloaded: 2026Ø-23T2Ø:53Z
Check the source to verify that this is the current version before use.

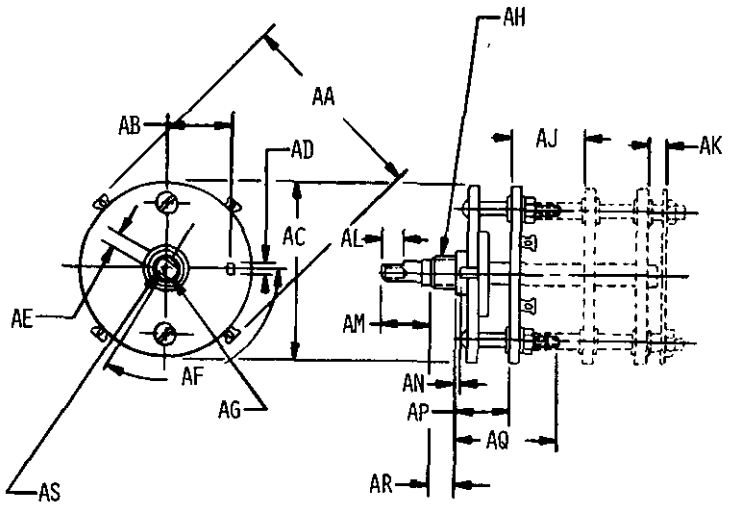

Ø12-Ø6-11

New page


Source: https://assist.dla.mil -- Downloaded: 202610-23T20:53Z
Check the source to verify that this is the current version before use.

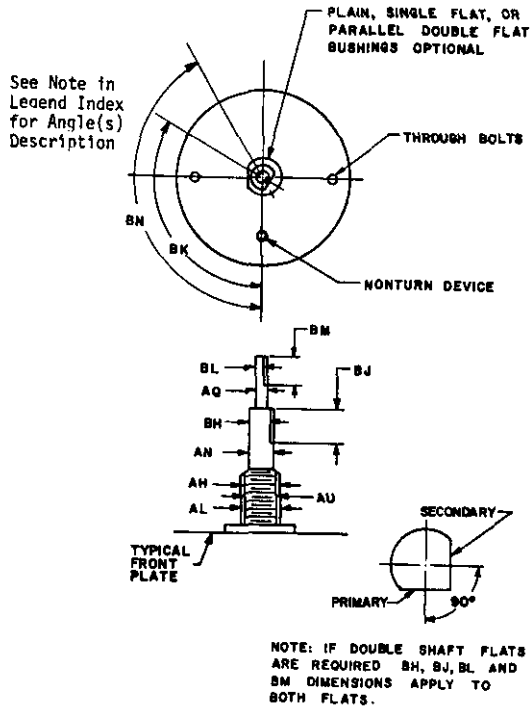

Ø12-11-1

Supersedes page 245 of 5 January 1979.


Source: https://assist.dla.mil -- Downloaded: 202610-23T20:53Z
Check the source to verify that this is the current version before use.

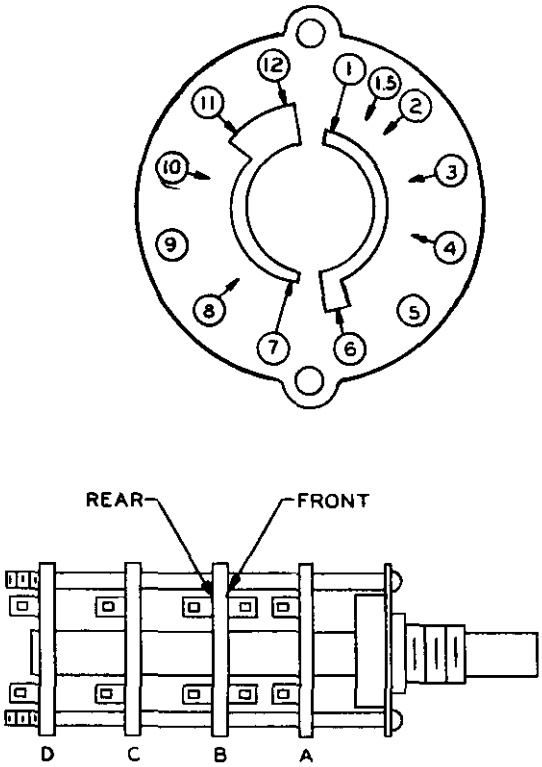

012-11-2


New page

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

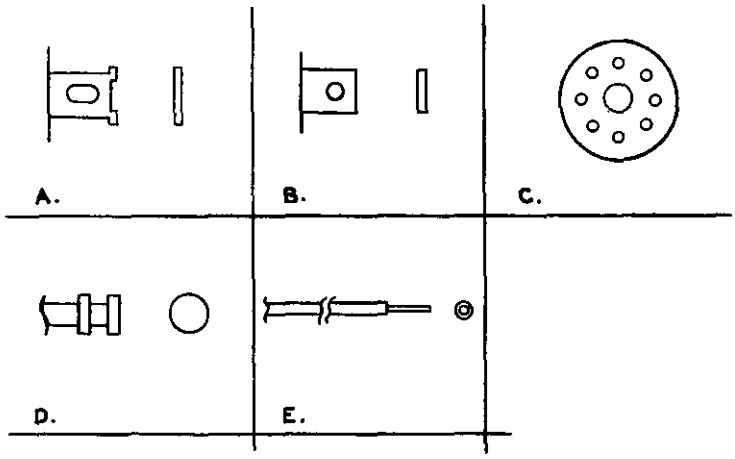

A. SOLDER TAB
B. QUICK DISCONNECT
C. CONNECTOR
D. TURRET
E. WIRE LEAD

012-11-3

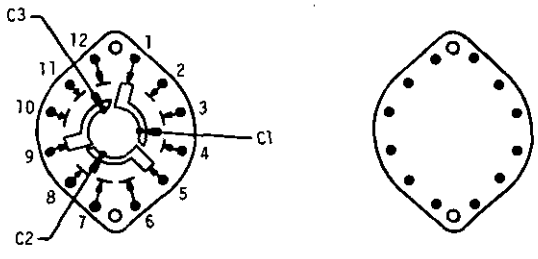

SECTION 1
FRONT


SECTION 1
REAR

SECTIONS ARE VIEWED FROM FRONT OR SHAFT END WITH
SWITCH IN EXTREME COUNTERCLOCKWISE POSITION


012-11-4

New page

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

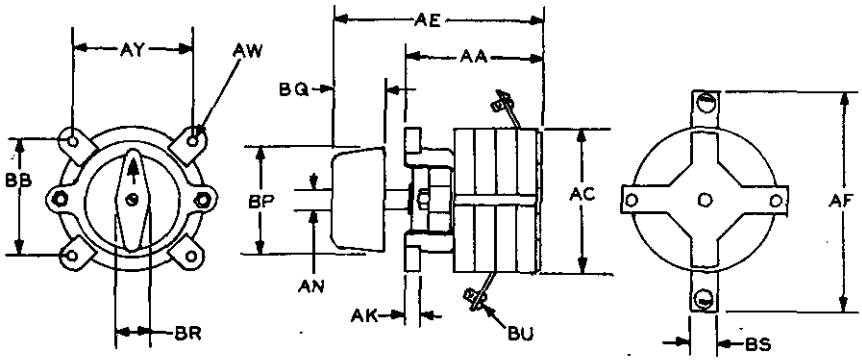


Ø12-12-1

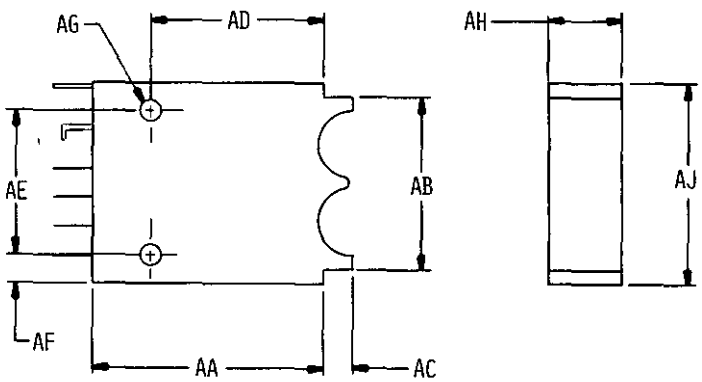


Ø12-13-1

Source: https://assist.dla.mil/ -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

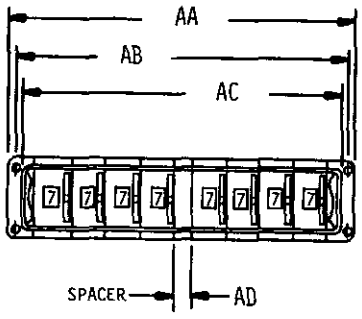


Ø12-13-2

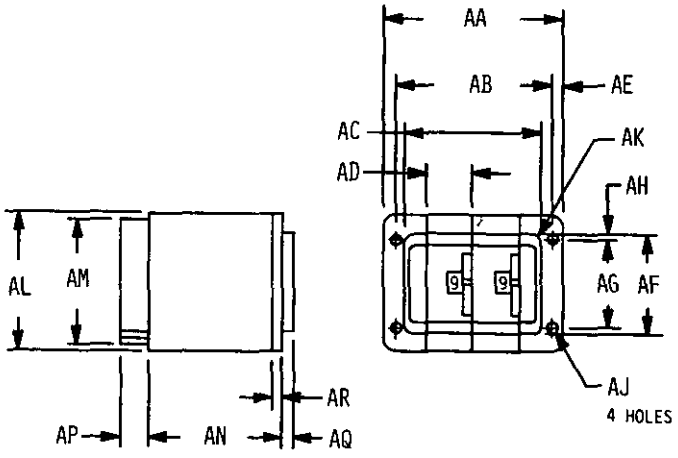


Ø12-13-3


Source: https://assist.dla.mil - Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.




Ø12-14-1

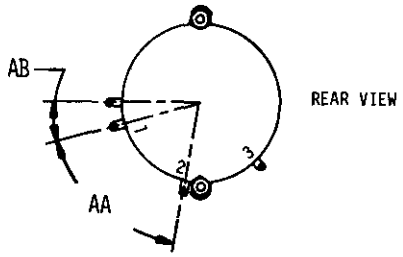

Ø12-14-2




Ø12-14-3




Ø12-14-4

New page


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.




Ø12-14-5

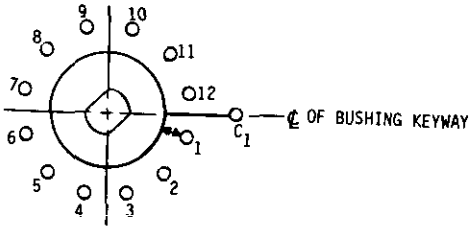

Ø12-14-6

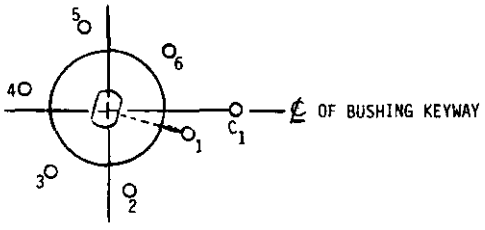


Ø12-14-7




Ø12-14-8

New page


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.




Ø12-14-9



Ø12-14-10




Ø12-14-11

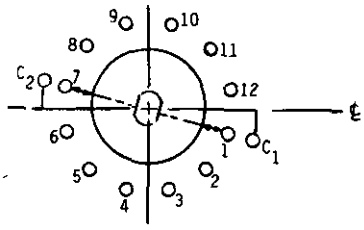


Ø12-14-12

New page

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.




Ø12-14-13

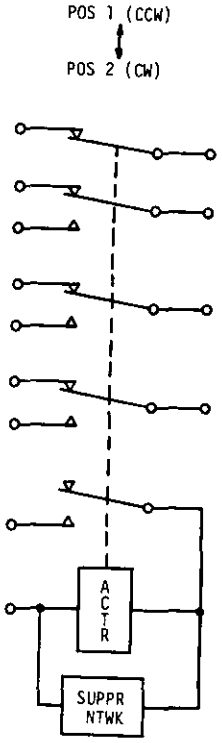


Ø12-15-1

New page

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:53Z
Check the source to verify that this is the current version before use.

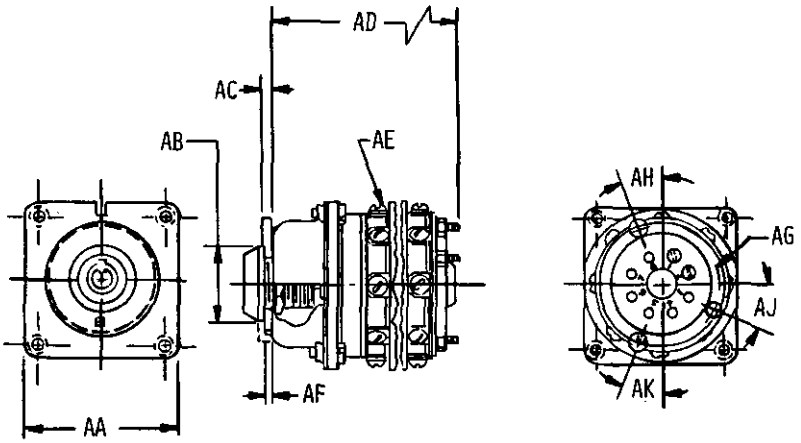

Ø12-16-1

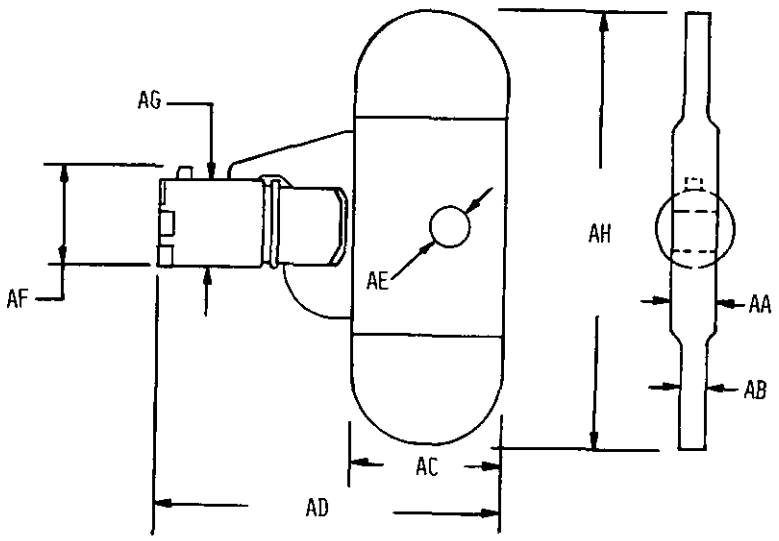

Ø12-17-1

New page

Source: https://assist.dla.mil -- Downloaded: 2026Ø10-23T20:53Z
Check the source to verify that this is the current version before use.