MILITARY SPECIFICATION

CHARGE ASSEMBLY FOR M207E5 WARHEAD INERT PARTS FOR,

This Specification is approved for use within the US Army Armament Munitions and Chemical Command, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1. Scope. This specification covers the quality assurance provisions and special requirements not covered by the drawings for the fabrication of the parts for the Charge Assembly for the M207E5 Warhead.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1. Specifications and standards. Unless otherwise specified, the following specifications and standards of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation, form a part of this specification to the extent specified herein.

SPECIFICATIONS

MILITARY

MIL-A-48078 - Ammunition Standard Quality Assurance Provisions, General Specification for

STANDARDS

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.

MIL-STD-1169 - Packaging, Packing and Marking for Shipment of Inert Ammunition Components

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, US Army Armament Research and Development Center, Attn: AMSMC-QA, Dover, New Jersey 07801-5001 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:36Z
Check the source to verify that this is the current version before use.

2.1.2 Other government documents, drawings and publications. The following other Government documents, drawings, and publications form a part of this specification to the extent specified herein. Unless otherwise specified, the issues shall be those in effect on the date of the solicitation.

DRAWINGS

US ARMY ARMAMENT RESEARCH AND DEVELOPMENT CENTER

9387148	- Liner
9387149	- Body
9387158	- Plate
9399691	- Body, PIC
9387189	- Pad, Compression

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer).

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM B152	Copper, strip and rolled bar
ASTM B248	General requirement for wrought copper and copper - alloy plate, sheet, strip and rolled bar

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, Pennsylvania 19102)

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence.

3. REQUIREMENTS

3.1 Materials. Materials shall be in accordance with the applicable drawings and specifications.

3.2 Parts. The parts shall comply with all requirements specified on drawings 9387148, 9387149, 9387158, 9399691, and 9387189, all associated drawings and with all requirements of applicable standards and specifications.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:36Z
Check the source to verify that this is the current version before use.

3.3 Data requirements. The contractor shall generate data in accordance with requirements of data item description cited in 6.4.

3.4 First article inspection. This specification contains technical provisions for first article inspection. Requirements for the submission of first article samples by the contractor shall be as specified in the contract.

3.5 Process control

3.5.1 Process documentation. Concurrent with submission of the First Article Sample (see paragraph 4.3), the contractor shall submit a written description of the heat treatment process used to produce the samples together with the means by which the process can be verified in production. The method of verification shall be reviewed by and must be acceptable to the government. See Data Item Description DI-P-1604 (Tailored). Proposed changes to the process which produced the accepted First Article Sample shall be submitted to the government prior to actual implementation of the change. A new First Article Sample will be required for each process change.

3.5.2 Liner traceability. The contractor shall also submit a method to establish liner traceability with specific annealed batches. This information shall be furnished as a part of DI-P-1604 (Tailored) above and shall be reviewed by and must be acceptable to the government.

3.6 Workmanship. All parts shall be fabricated in a thorough workmanlike manner. The parts shall be free of burrs, chips, sharp edges, cracks, unblended radii, dents, tool marks, chipped edges, porosity, warpage, gouges, surface defects dirt, grease, corrosion products, burn marks and other foreign matter. The cleaning method used shall not be injurious to any of the parts nor shall the parts be contaminated by the cleaning agents. Surface coatings shall be continuous except for scratches not exposing base metal.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection and standard quality assurance provision. Unless otherwise specified herein or in the contract, the provisions of MIL-A-48078 shall apply and are hereby made a part of this detailed specification. First article samples shall not be considered part of the production quantities.

4.2 Classification of inspections. The following types of inspection shall be conducted.

a. First article inspection

b. Quality conformance inspection.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:36Z
Check the source to verify that this is the current version before use.

4.3 First article inspection

4.3.1 Submission. The contractor shall submit a first article sample as designated by the Contracting Officer for evaluation in accordance with provisions of 4.3.3. The first article sample shall consist of the following items in sample quantities as indicated:

Part Description	Drawing	Quantity
Liner	9387148	20
Body	9387149	20
Plate	9387158	20
Body, PIC	9399691	20
Pad, Compression	9387189	20

4.3.2 Testing. Sample material of the starting stock for the liner, shall be selected prior to fabrication and used for hardness, chemical composition and grain size tests. In addition, ten finish machined liners from a single annealed batch shall be used for testing for grain size and hardness.

4.3.3 Inspections to be performed. See MIL-A-48078 and Table I specified herein.

4.3.4 Rejection. See MIL-A-48078.

4.3.5 Completion. Upon completion of first article testing, all samples and components shall be sent to Commander, ARDC, ATTN: SMCAR-AEF-C, Dover, NJ 07801-5001.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:36Z
Check the source to verify that this is the current version before use.

TABLE I - First article inspection

CLASSIFICATION OF DEFECTS & TESTS

MIL-C-48670 (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
	Charge Assembly for M207E5 Warhead, Parts for				See Below
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
	Liner (Drawing 9387148) Examination for defects	20		3.2	4.4.2.1
	Hardness of starting stock	Sample Mat'l		3.2	4.6.1
	Chemical composition of starting stock	Sample Mat'l		3.2	4.6.2
	Grain size of starting stock	Sample Mat'l		3.2	4.6.3
	Hardness of finished liner (See Note 1)	10		3.2	4.6.4
	Grain size of finished liner (See Note 1)	10		3.2	4.6.5
	Body (Drawing 9387149) Examination for defects	20		3.2	4.4.2.2
	Plate (Drawing 9387158) Examination for defects	20		3.2	4.4.2.3
	Body, PIC (Drawing 9399691) Examination for defects	20		3.2	4.4.2.4
	Pad, Compression (Drawing 9387189) Examination for defects	20		3.2	4.4.2.5

NOTES: 1. The same 10 liners are used for both tests.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:36Z
Check the source to verify that this is the current version before use.

4.4 Quality conformance inspection

4.4.1 Inspection lot formation. Inspection lots shall comply with the lot formation provisions of MIL-A-48078. In addition, inspection lots shall contain:

a. Liner (Drawing 9387148) from not more than one interfix lot number from one manufacturer.

b. Body (Drawing 9387149) from not more than one interfix lot number from one manufacturer.

c. Plate (Drawing 9387158) from not more than one interfix lot number from one manufacturer.

d. Body, PIC (Drawing 9399691) from not more than one interfix lot number from one manufacturer.

e. Pad, Compression (Drawing 9387189) from not more than one interfix lot number from one manufacturer.

4.4.2 Examinations. See MIL-A-48078.

a. Sampling plans. Unless otherwise specified in the classification of defects and test tables, sampling plans for major and minor defects shall be in accordance with MIL-STD-105, Inspection Level II.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:36Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-C-48670 (AR)

PARAGRAPH	TITLE		SHEET 1 OF 2		DRAWING NUMBER 9387148
4.4.2.1	Liner				NEXT HIGHER ASSEMBLY 9399673
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None defined				
MAJOR					
101	Outside diameter (O.D.)		0.40%	3.2	Gage
102	Inside diameter (I.D.)		0.40%	3.2	Gage
103	Runout of O.D. with datums A and B		0.40%	3.2	Gage
104	Depth of datum A from base		0.40%	3.2	Gage
105	Length of datum A to datum B		0.40%	3.2	Gage
106	Inside spherical radius		0.40%	3.2	Gage
107	Wall thickness at apex end (See Note 7 on Dwg.)		0.40%	3.2	Gage
108	Wall thickness between datum A and datum B		0.40%	3.2	Gage
109	Perpendicularity of base of liner with datums A and B		0.40%	3.2	Gage
110	Straightness between datum A and datum B		0.40%	3.2	Gage
111	Length from datum A inside spherical radius		0.40%	3.2	Gage
112	Wall thickness variation between datum A and datum B improper (See Note 4 on Dwg.)		0.40%	3.2	Gage

NOTES:

AMSMC Form 1570, 1 Feb 85

Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:36Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-C-48670 (AR)

PARAGRAPH	TITLE		SHEET 2 OF 2		DRAWING NUMBER 9387148
4.4.2.1	Liner				NEXT HIGHER ASSEMBLY 9399673
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
113	Hardness of starting stock (See Note 1)	Mat'l Sample		3.2	4.6.1
114	Chemical composition of starting stock (See Note 1)	Mat'l Sample		3.2	4.6.2
115	Grain size of starting stock (See Note 1)	Mat'l Sample		3.2	4.6.3
116	Hardness of finished liner (See Note 1)	4.4.3.1 & 4.4.3.1.1		3.2	4.6.4
117	Grain size of finished liner (See Note 1)	4.4.3.1 & 4.4.3.1.1		3.2	4.6.5
118	Evidence of discontinuity of machined surface		0.40%	3.2	Visual
MINOR					
201	Surface finish improper		0.65%	3.2	Gage
202	Evidence of poor workmanship		0.65%	3.6	Visual

NOTES: 1. Starting stock - See note 2 of drawing.

AMSMC Form 1570, 1 Feb 85 Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:36Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-C-48670 (AR)

PARAGRAPH	TITLE		SHEET OF		DRAWING NUMBER
4.4.2.2	Body				9387149
					NEXT HIGHER ASSEMBLY
					9399673
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None defined				
MAJOR					
101	Wall thickness		.40%	3.2	Gage
102	Total length		.40%	3.2	Gage
103	Inside diameter forward end		.40%	3.2	Gage
104	Diameter of counterbore		.40%	3.2	Gage
105	True position of counterbore		.40%	3.2	Gage
106	Small inside diameter aft end		.40%	3.2	Gage
107	Runout of small inside diameter aft end		.40%	3.2	Gage
108	Counterbore depth from aft end		.40%	3.2	Gage
109	Outside diameter aft end		.40%	3.2	Gage
110	Runout outside diameter aft end		.40%	3.2	Gage
111	Outside diameter forward end		.40%	3.2	Gage
112	Runout outside diameter forward end		.40%	3.2	Gage
113	Parallelism aft face to forward face		.40%	3.2	Gage
114	Perpendicularity of forward face		.40%	3.2	Gage
MINOR					
201	Surface finish improper		.65%	3.2	Gage
202	Evidence of poor workmanship		.65%	3.6	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:36Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-C-48670 (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.3	Plate	1 OF 1	9387158
			NEXT HIGHER ASSEMBLY: 9399673

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None defined				
MAJOR					
101	Inside diameter		0.40%	3.2	Gage
102	True position of inside diameter		0.40%	3.2	Gage
103	Large outside diameter		0.40%	3.2	Gage
104	Depth, inside diameter		0.40%	3.2	Gage
MINOR					
201	Overall thickness		0.65%	3.2	Gage
202	Chamfer missing or incorrect		0.65%	3.2	Visual/Gage
203	Protective finish		0.65%	3.2	Gage
204	Evidence of poor workmanship		0.65%	3.6	Visual

NOTES:

AMSMC Form 1570, 1 Feb 85

Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:36Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-C-48670 (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.4	Body, PIC				9399691
					NEXT HIGHER ASSEMBLY 9399689
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None defined				
MAJOR					
101	Large inside diameter		0.40%	3.2	Gage
102	Small inside diameter		0.40%	3.2	Gage
103	Length large inside diameter		0.40%	3.2	Gage
104	True position large inside diameter		0.40%	3.2	Gage
105	Runout, large inside diameter		0.40%	3.2	Gage
106	Outside diameter		0.40%	3.2	Gage
107	True position, outside diameter		0.40%	3.2	Gage
108	Runout, outside diameter		0.40%	3.2	Gage
MINOR					
201	Overall length		0.65%	3.2	Gage
202	Protective finish improper		0.65%	3.2	Gage
203	Evidence of poor workmanship		0.65%	3.6	Visual

NOTES:

AMSMC Form 1570, 1 Feb 85

Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:36Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-C-48670 (AR)

PARAGRAPH	TITLE		SHEET OF		DRAWING NUMBER
4.4.2.5	Pad, Compression				9387189
					NEXT HIGHER ASSEMBLY 9399687
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None defined				
Major					
101	Outside diameter		0.40%	3.2	Gage
102	Material				Certification
MINOR					
201	Inside diameter		0.65%	3.2	Gage
202	Thickness		0.65%	3.2	Gage
203	Evidence of poor workmanship		0.65%	3.6	Visual

NOTES:

AMSMC Form 1570, 1 Feb 85

Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:36Z
Check the source to verify that this is the current version before use.

4.4.3 Testing. Testing is described in First Article and Quality Conformance inspection tables.

4.4.3.1 Heat treatment. Tests shall be performed in accordance with 4.6.4 and 4.6.5.

4.4.3.1.1 Sampling. Sample testing shall be in accordance with the following:

a. Randomly select two liners per annealed batch and perform the tests in accordance with 4.6.4 and 4.6.5. An annealed batch shall consist of that quantity of liners that has been annealed in the same heat treat equipment at the same time by the same method and temperature in one unchanged process.

b. If five consecutive annealed batches meet the heat treatment requirements, reduce the sampling to one liner per month's production of annealed batches. Test results must be submitted to and be accepted by the government.

c. If an unacceptable liner is found, start again at step a. In addition, sample one liner from each annealed batch processed after the last acceptable quantity. Batches represented by unacceptable liners shall be rejected.

d. In addition to the sample test results, evidence must be submitted to establish that the heat treatment process used for each month's production is unchanged from the approved process (See para. 3.5.1). This evidence shall be in the form of permanent hard records, such as temperature-time tracings.

4.4.4 Inspection equipment. The inspection equipment required to perform the examination and tests prescribed herein as described in the "Paragraph Reference/Inspection Method" column in the tables starting with paragraph 4.4.2.1. The contractor shall submit for approval inspection equipment designs in accordance with the terms of the contract. See Section 6 of MIL-A-48078 and 6.3 herein.

4.5 Methods of inspection

4.5.1 Materials, components and processes. Compliance with all requirements of Section 3 of this specification shall be ascertained by current and continuing examination of inspection and test data to determine that all components (parts and materials) have been inspected and tested and found to comply with their respective drawing and specification requirements, and that all specified manufacturing processes have been followed.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:36Z
Check the source to verify that this is the current version before use.

4.5.2 Visual and mechanical inspection. The visual, manual and mechanical inspections and tests shall verify compliance with the requirements of Section 3 and 5 of this specification in accordance with 4.4.2 herein and Table I.

4.6 Metallurgical & chemical tests. The following tests shall be performed using equipment and procedures prescribed by ASTM B 248.

4.6.1 Hardness of starting stock. The Rockwell hardness of a sample of starting stock shall be evaluated. These test data shall be independent from the supplier data. Failure of the sample to comply with the requirements of ASTM B 152 shall cause rejection of that quantity of starting stock represented by the sample. The hardness test data shall be submitted in accordance with DI-T-5247 (Tailored) (See 6.4).

4.6.2 Chemical composition of starting stock. Sample of starting stock shall be analyzed for chemical requirements. These test data shall be independent from supplier data. Failure of the sample to comply with the requirements of ASTM B 152 shall cause rejection of that quantity of starting stock represented by the sample. Results of these tests shall be submitted in accordance with DI-T-5247 (Tailored) (See 6.4).

4.6.3 Grain size of starting stock. Sample of starting stock shall be tested for grain size. This test shall be independent from supplier data. Failure of the sample to comply with the requirements of ASTM B 152 shall cause rejection of that quantity of starting stock represented by the sample. The grain size test data shall be submitted in accordance with DI-T-5247 (Tailored) (See 6.4).

4.6.4 Hardness of finished liner. The sample liners shall be sectioned longitudinally into four equal parts and marked for exact location relative to the finished liner. The Rockwell F hardness readings shall be taken 0.1 inch from the base and every 0.7 inch thereafter in a longitudinal direction, from base to apex, for three (3) readings on each section (See Fig. 1). A total of twelve (12) readings shall be taken for the finished liners. The hardness readings shall be identified as to their location on the liner. The recorded readings shall be analyzed for variations in hardness in both the longitudinal and circumferential directions. If any of the sample liners do not meet the hardness requirement specified on the drawing, the liner heat treat batch represented by the samples shall be rejected. The hardness test data shall be submitted in accordance with DI-T-5247 (Tailored) (See 6.4). This is a destructive test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:36Z
Check the source to verify that this is the current version before use.

4.6.5 Grain size of finished liner. A test section from 4.6.4 shall be utilized for taking grain size. Grain size shall be taken on one of the quartered sections in a longitudinal direction 0.60 inch from the base and 1.0 inch apart from each other for a total of two readings per sample liner (See Fig. 1). If any of the sample liners do not meet the grain size requirements as specified on the drawing, the liner heat treat batch represented by the sample shall be rejected. The grain size test data shall be submitted in accordance with DI-T-5247 (tailored) (See 6.4).

5. PACKAGING

5.1 Packaging and packing. The parts shall be packaged and packed in accordance with the requirements of MIL-STD-1169.

5.2 Marking. Marking shall be in accordance with the requirements of MIL-STD-1169.

6. NOTES

6.1 Intended use. The parts covered by this specification are components of the Product Improved Probe for the TOW 2 Warhead Section, Guided Missile, HE, M207E5.

6.2 Ordering data. See MIL-A-48078.

6.3 Submission of inspection equipment designs for approval. See MIL-A-48078. Submit equipment designs as required to Commander, US Army Armament Research and Development Center, ATTN: AMSMC-QAT-I, Dover, New Jersey 07801 - 5001.

6.4 Data requirements - Deliverable data required by the specification is cited in the following paragraphs:

Paragraph	Data Requirement	Applicable DID
3.3	Ammunition Data	DI-L-1410
3.5.1 & 3.5.2	Manufacturing Methods Report	DI-P-1604 (Tailored)
4.6.1, 4.6.2, 4.6.3, 4.6.4, & 4.6.5	Test Report	DI-T-5247 (Tailored)

The above data items shall be delivered to the following:

Commander
U.S. Army Armament Research and Development Center
ATTN: AMSMC-QAT-B
Dover, N.J., 07801 - 5001

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:36Z
Check the source to verify that this is the current version before use.

SCHEMATIC OF SECTIONED LINER

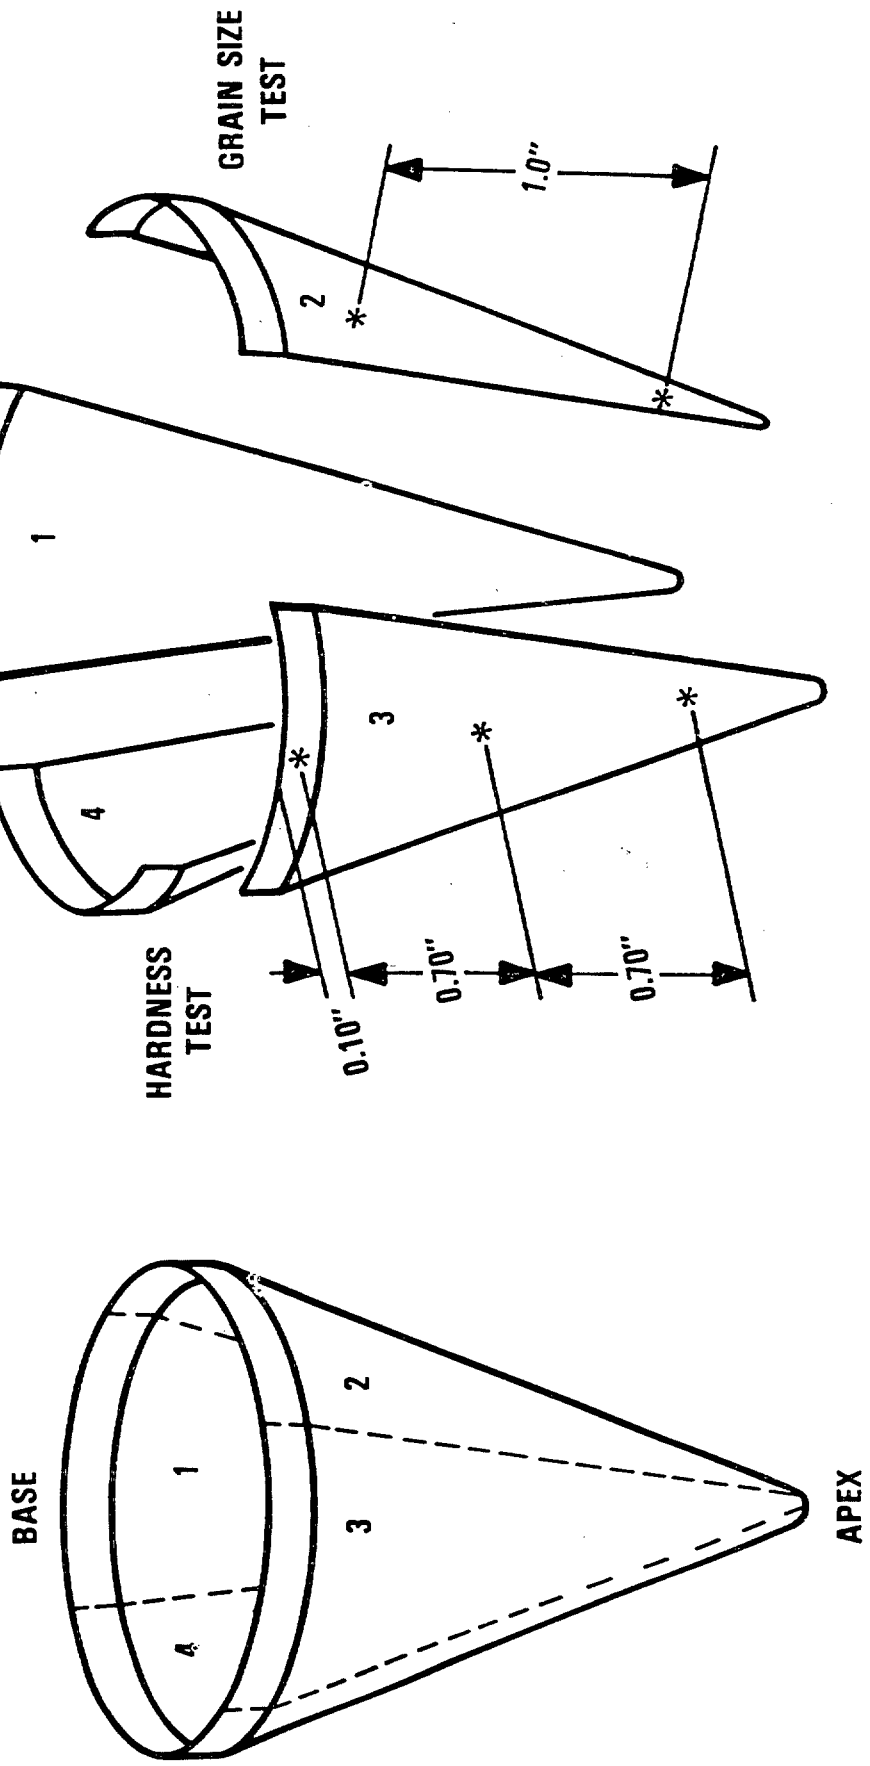


FIGURE 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:36Z
Check the source to verify that this is the current version before use.

Custodian:
Army-AR

Preparing activity:
Army-AR

(Project 1336-A515)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:36Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-C-48670	CHARGE ASSEMBLY FOR M207E5 WARHEAD INERT PARTS FOR

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426

PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:36Z
Check the source to verify that this is the current version before use.