MIL-C-82141 (MC)
4 January 1967
SUPERSEDING
(See 6.5)

MILITARY SPECIFICATION

COVER, MUSIC CARRYING POUCH: EMBROIDERED

1. SCOPE

1.1 This specification covers the requirements for one type and size scarlet wool broadcloth music carrying pouch cover, embroidered with the United States Marine Corps emblem.

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of the specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

R-N-91	-	Naphthalene, Technical
V-T-276	-	Thread, Cotton
UU-P-268	-	Paper, Kraft, Untreated, Wrapping
CCC-T-191	-	Textile Test Methods

MILITARY

MIL-G-16491	-	Grommet, Metallic
MIL-B-17757	-	Boxes, Fiberboard, Corrugated (Modular Sizes)
MIL-C-82252	-	Cloth, Broadcloth, Wool And Wool Synthetic

STANDARDS

FEDERAL

FED. STD. NO. 751	-	Stitches, Seams, And Stitchings

MILITARY

MIL-STD-105	-	Sampling Procedures And Tables For Inspection By Attributes
MIL-STD-129	-	Marking For Shipment And Storage

FSC 7720

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:46Z
Check the source to verify that this is the current version before use.

(Copies of specifications and standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following document forms a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

UNIFORM CLASSIFICATION COMMITTEE
Uniform Freight Classification Rules

(Application for copies should be addressed to the Uniform Classification Committee, 202 Chicago Union Station, Chicago, Illinois 60606.)

3. REQUIREMENTS

3.1 Samples. Samples are furnished solely for guidance and information to the supplier (see 6.3). Variation from this specification may appear in the sample, in which case the specification shall govern.

3.2 Preproduction sample approval. Unless otherwise specified (see 6.2), before production is commenced, a sample of the finished cover shall be submitted, or made available, to the contracting officer or his authorized representative for approval. The approval of the preproduction sample authorizes the commencement of production, but does not relieve the supplier of responsibility for compliance with all applicable provisions of the specification. The preproduction sample shall be manufactured by the supplier in the same facilities to be used for the manufacture of the production items.

3.3 Material.

3.3.1 Basic material. The basic material shall be cloth, broadcloth, wool, scarlet, shade 2501, 16.5 ounce, conforming to type I, class 4 of MIL-C-82252, except the finished cloth shall show fair fastness to crocking, perspiration, wet (dry) cleaning and light.

3.3.2 Buckram. The buckram for embroidering shall be of good commercial quality, as used in the industry.

3.3.3 Rayon thread. The embroidery thread shall be continuous filament, regenerated cellulose (viscose or cuprammonium) type of rayon, 600 $\pm$ 30 denier, single ply, and minimum breaking strength of 2.3 pounds.

3.3.3.1 Color and colorfastness. Embroidery thread shall match the approved standard shades (see 6.3), conforming to the following cable numbers for rayon thread:

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:46Z
Check the source to verify that this is the current version before use.

White	Cable No. 65005
Scarlet	Cable No. 65006
Silver Gray	Cable No. 65008
Light Blue	Cable No. 65014
Old Gold	Cable No. 65021

The dyed threads shall show good fastness to wet (dry) cleaning and light when tested as specified in Table II.

3.3.4 Cotton thread.

3.3.4.1 Bobbin thread. Bobbin thread used in the embroidery shall be a good commercial grade of two-ply cotton yarn.

3.3.4.2 Sewing thread. The thread for seaming and stitching shall be cotton, soft finish, ticket no. 40, 3-ply, conforming to type IA3 of V-T-276. The color of the thread shall be scarlet w cable No. 66040, except the dyed thread shall show fair fastness to wet (dry) cleaning and light when tested as specified in V-T-276. The thread for basting shall be a good commercial grade.

3.3.5 Eyelet. Eyelet shall be brass, bright finish, conforming to type III, class 1, size 0 of MIL-G-16491.

3.4 Design. The cover shall be the Marine Corps design, as shown on Figures 1 and 2.

3.5 Patterns. The standard patterns furnished by the Government shall not be altered in any manner and shall be used only as a guide for cutting working patterns. The standard patterns provide for a 1/4 inch seam allowance.

3.5.1 List of pattern parts. Covers shall be cut from the specified material in accordance with the pattern parts indicated.

Material: Cloth, Broadcloth, Wool

Item	Pattern nomenclature	No. of cut parts
1.	Front part	1
2.	Lower backpart	1
3.	Upper backpart	1

3.6 Construction. The construction shall conform in all respects to Figure 2 and as specified herein. The cover, consisting of three pieces of basic material, shall have a one piece front embroidered with the Marine Corps emblem, a two piece back with a horizontal, straight type buttonhole in the lower backpart, and a brass eyelet near the top end of the cover. All raw edges, including edges of seams, shall be overedge stitched.

3.6.1 Manufacturing requirements. The cover shall be manufactured in strict accordance with the operations and the stitch, seam and stitching types specified in Table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:46Z
Check the source to verify that this is the current version before use.

3.6.1.1 Operations. The supplier is not required to follow the exact sequence of operations as listed in Table I, but all operations specified shall be used to manufacture the cover.

3.6.1.2 Stitches, seams and stitchings. The stitch, seam and stitching types specified in Table I shall conform to FED. STD. NO. 751. The number of stitches per inch as specified in Table I, indicates the minimum and maximum number permitted.

3.6.1.3 Tacking and backstitching. Ends of seams or stitching, when not caught in other seams or stitching, shall be securely backtacked not less than 1/4 inch; thread breaks shall be secured by stitching back of break not less than 1/2 inch. All thread ends shall be trimmed and, loose ends shall be removed.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO	OPERATION	STITCH TYPE	SEAM OR STITCHG TYPE	STITCHES PER INCH	THREAD	
					NEEDLE	BOBBIN OR LOOPER
1.	Cutting.					
	a. Cut covers in strict accordance with patterns furnished by the Government.					
	b. Cut fabric in direction indicated by directional lines on pattern.					
2.	Replacement of damaged parts.					
	a. Replace at time of cutting the component part containing damages such as holes or serious weakening defects, such as smashes, multiple floats and slubs likely to develop into holes.					
	b. Replace component part damaged during the manufacturing process by needle chews which may be expected to develop into holes, scissors or knife cuts, tears, mends or burns.					
3.	Make front part of cover.					
	a. The Marine Corps emblem shall be embroidered in accordance with the standard sample. The stitch types, texture, density of the embroidered emblem shall conform in all respects to the standard sample. Embroidery work shall not be stiff, but shall be soft and flexible in					

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:46Z
Check the source to verify that this is the current version before use.

OPN NO	OPERATION	STITCH TYPE	SEAM OR STITCHG TYPE	STITCHES PER INCH	THREAD	
					NEEDLE	BOBBIN OR LOOPER
3.	Make front part of cover. (Con'd)					
	finish. The thread colors of the emblem shall be as specified in 3.3.3.1. The buckram specified in 3.3.2 shall be used as backing for reinforcing the stitches of the embroidered emblem.					
4.	Overedge stitch ends.					
	a. Overedge stitch the bottom edge of the upper backpart and the top edge of the lower backpart as shown in Figure 2.	504	EFd-1	12-16	40/3	40/3
5.	Make buttonhole.					
	a. The buttonhole shall be of a horizontal straight type, 1-1/2 to 1-5/8 inches long with a minimum of 96 stitches per buttonhole and securely tacked at both ends. The buttonhole shall be made at the center of the lower backpart 1-1/2 ± 1/4 inches above the raw bottom edge, in accordance with mark on the pattern.	Buttonhole		96 per buttonhole including tack	40/3	40/3
6.	Assemble cover and stitch parts.					
	a. Position the lower backpart face to face with the front part, and with the sides and bottom edges even.					
	b. Position the upper backpart face to face with the front part and with the side and upper edges even, and the lower edge of the upper backpart overlapping the upper edge of the lower backpart.					
	c. Overedge stitch the three plies together at side, bottom and upper edges as shown in Figure 2.	301 or 401 and 506 (combined)	SSa-2	18-22	40/3	40/3

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:46Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO	OPERATION	STITCH TYPE	SEAM OR STITCHG TYPE	STITCHES PER INCH	THREAD	
					NEEDLE	BOBBIN OR LOOPER
7.	Turn cover.					
	a. Turn cover right side out, with the face of fabrics and emblem on the outside of cover, and completely working out all the corners.					
	b. Baste cover along seamed edges.	101 or Hand				
	c. Press the cover smooth and flat with a heated pressing machine.					
8.	Attach eyelet.					
	a. The eyelet shall be securely clinched to the cover through front and upper backpart without cutting or otherwise damaging the fabric, at location shown by the mark on the pattern. The flange of the eyelet shall be on the front of the finished cover.					
9.	Clean cover.					
	a. Pull any basting thread, trim and remove any loose ends of thread and remove any spots or stains.					
10.	Press cover.					
	a. Press the cover smooth and flat with a heated pressing machine.					

3.7 Finished measurements. The finished cover shall conform to the measurements shown in Figure 2.

3.8 Workmanship. The finished cover shall conform to the quality and grade of product established by this specification. The occurrence of defects shall not exceed the applicable acceptable quality levels.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:46Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Preproduction sample inspection. When required, the preproduction sample submitted in accordance with 3.2, shall be inspected as specified in 4.3.2 for compliance with design, construction and workmanship requirements.

4.3 Inspection. Inspection shall be in accordance with provisions set forth in MIL-STD-105, except where otherwise indicated herein.

4.3.1 Inspection of components and materials. In accordance with 4.1 above, components and materials shall be tested in accordance with all the requirements of referenced specifications, drawings and standards unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase document. In addition, testing shall be performed in accordance with test methods prescribed in CCC-T-191 on component listed in Table II for the characteristics shown. The unit of product for lot formation and testing shall be as shown below:

Component	Lot size expressed as	Sample unit for testing
Rayon thread	Bobbins	Sufficient number of bobbins to total a minimum of 360 yards

The sample size shall be as shown below. The lot shall be unacceptable if one or more units of product fail to meet any specified requirements.

Lot size	Sample size
800 or less	2
801 to 22,000	3
22,001 and over	5

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:46Z
Check the source to verify that this is the current version before use.

Table II - Test methods

Component	Characteristics	Rqmt. para.	Test methods	No. det. per S/U	Results reported as
Rayon thread (Embroidery)	Material identification	3.3.3	Std. Comm'l	1	Pass or fail
	Ply	3.3.3	Visual	1	To nearest number
	Denier	3.3.3	4021	1	To nearest denier
	Breaking strength (lbs.)	3.3.3	4100	20	Avg. of 20 det. to nearest 0.1 lbs.
	Color	3.3.3.1	Visual	1	Pass or fail
	Colorfastness to:				
	Wet(dry)cleaning	3.3.3.1	4622	1	Good, fair or poor
	Light	3.3.3.1	4660	1	Good, fair or poor

4.3.2 Inspection of the end item. The classification of defects found during examinations shall be in accordance with the list shown in 4.3.2.1 and 4.3.2.2. The lot size and sample unit shall be expressed in units of one finished cover. Inspection levels and acceptable quality levels shall be as specified in 4.3.2.3.

4.3.2.1 Classification of defects. All defects shall be classified as indicated below.

Examine	Defect	Classification Major	Minor
Basic fabric	Any hole, cut, tear, smash or weak place.	X	
	Streak or shade bar.	X	
	Any mends or burns.	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:46Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Classification Minor
Open seams	On stitch type 301:		
	-One inch or less.		X
	-More than one inch.	X	
	On stitch type 401:		
	-any open seam.	X	
Note: A seam shall be classified as open when one or more stitches joining a seam are broken or when two or more continuous skipped stitches or run-offs occur. On double stitched seams, a seam shall be considered open when either one or both sides of the seam are open.			
Run-off.	(See classification of open seam).		
Seam and stitch type	Wrong seam or stitch type.	X	
Gage of stitching; stitching margin	Irregular, i.e., unevenly gaged or corresponding stitches not uniformly gaged.		X
Stitch tension	Loose tension resulting in a loosely secured seam.		X
	Tight tension (stitches break when normal strain is applied to seam or stitching).		X
Note: Puckering is evidence of tight tension. When puckering is evident, seam shall be tested by exerting normal pull in lengthwise direction of seam.			
Stitches per inch	One or two stitches less than minimum specified.		X
	Three or more stitches less than minimum specified.	X	
	Stitches in excess of maximum specified.		X
Thread breaks	Not backstitched or overstitched as specified.		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:46Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Minor
Eyelet	Not type and size specified.	X	
	Broken or malformed, failing to serve intended purpose.	X	
	Split, burr, sharp edge or corroded area.	X	
	Not properly clinched; i.e., cutting surrounding fabric; loose, exposing teeth of washer.	X	
Buttonhole	Not horizontal straight type.	X	
	Number of stitches less than specified.		X
	Stitching not securely caught in fabric causing stitching to pull away.	X	
	Not securely tacked at each end.	X	
	Broken stitch.		X
	Length not within specified range.	X	
Embroidery	Not in conformance with standard sample with respect to design, color arrangement, stitch type or density.	X	
	Embroidery work stiff.		X
	Thread colors not as specified.	X	
	Shift affecting appearance.	X	
	Loose or tight tension affecting appearance.	X	
	Bunched or tangled yarns.	X	
	Stitching incomplete.	X	
	Broken or skipped stitches affecting appearance.	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:46Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Minor
	Bobbin thread showing on face of embroidery affecting appearance.	X	
	Embroidery misshaped or distorted.	X	
	Buckram omitted or entire design not reinforced by buckram.	X	
Assembly	Edges of cover not properly forced out resulting in uneven or irregular edges.		X
	Impression of basting stitches remaining in finished item.		X
Cleanness	Spots or stains not removed.		X
	Thread ends not trimmed throughout.		X

4.3.2.2 Examination for dimensions. Any measurement not conforming to the specified dimension and tolerance shall be considered a defect.

4.3.2.3 Acceptable quality levels and inspection levels. The inspection levels and acceptable quality levels (AQL), expressed in defects per hundred units (DHU) shall be as follows:

	Inspection level	AQL's
For defects in 4.3.2.1	II	2.5 Major 6.5 Total (major and minor defects combined)
For defects in 4.3.2.2	S-3	4.0 One class

4.3.3 Examination of preparation for delivery requirements. An examination shall be made to determine that applicable packaging, packing and marking requirements are complied with. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be sealed. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 and the AQL shall be 2.5 defects per hundred units.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:46Z
Check the source to verify that this is the current version before use.

Examine	Defect
Marking	Omitted, incorrect, illegible, of improper size, location, sequence or method of application.
Materials	Any component missing.
	Any component damaged, affecting serviceability.
Workmanship	Inadequate application of components, such as incomplete closure of case liners, container flaps, loose strapping, inadequate stapling.
	Bulging or distortion of containers.
Content	Number of covers per shipping container is more or less than required.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A or C, as specified (see 6.2).

5.1.1 Level A. Each cover shall be placed in an individual polyethylene bag fabricated from polyethylene film 0.0015 inch thick. The size of the bag shall be approximately 18 by 10 inches with a 1 inch lip along the open end of the 10-inch dimension. All seams and closures shall be effected by heat sealing. Naphthalene flakes shall be uniformly distributed throughout the contents of each polyethylene bag (see 6.4), conforming to class B of R-N-91 or equal. Prior to or during the final heat sealing operation, excess air shall be expelled in order to insure that the maximum number of covers be packed in the shipping container. Each bag shall contain a label (see 5.3).

5.1.2 Level C. Covers shall be packaged in accordance with the industry's normal practice.

5.2 Packing. Packing shall be level A, B or C as specified (see 6.2).

5.2.1 Level A.

5.2.1.1 Method 1. Thirty (30) covers, packaged as specified in 5.1, shall be packed in a shipping container conforming to class weather-resistant, size No. 1A of MIL-B-17757. The contents of the containers shall be covered on top and bottom with 30-pound minimum basis-weight kraft paper conforming to grade B of UU-P-268. Shipping containers shall be assembled, closed and reinforced as specified in the appendix thereto.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:46Z
Check the source to verify that this is the current version before use.

5.2.1.2 Method 2. When specified, twelve (12) level B shipping containers (360 covers) shall be packed in a shipping container conforming to class weather-resistant, size No. 4 of MIL-B-17757 and assembled, closed and reinforced as specified in the appendix thereto.

5.2.2 Level B. Thirty (30) covers shall be packed as specified in 5.2.1.1 except that the shipping containers shall conform to class domestic; size No. 1A of MIL-B-17757.

5.2.3 Level C. The covers packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with the Uniform Freight Classification Rules or regulations of other carriers applicable to the mode of transportation.

5.3 Marking. In addition to any special marking required by the contract or order the shipping containers shall be marked in accordance with the requirements of MIL-STD-129. A white paper label with the following information legibly printed or stamped thereon in black shall be placed in each polyethylene bag in order to permit ready identification.

Nomenclature
Stock number
Contract number
Name of contractor

6. NOTES

6.1 Intended use. The cover described herein is intended for use by Marine Corps Band and the Drum and Bugle Corps.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number and date of specification.
(b) Availability of standard sample (3.1)
(c) Whether preproduction sample approval is required (3.2).
(d) Selection of applicable levels of packaging and packing (5.1 and 5.2).

6.3 Samples and shade sample. For information regarding the availability of standard samples of the cover and of standard shades specified, address inquiry to the procuring activity issuing the invitation for bids.

6.4 Naphthalene flakes. The naphthalene flakes requirement (see 5.1.1) is not applicable when covers are made of moth repellent treated cloth.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:46Z
Check the source to verify that this is the current version before use.

6.5 Supersession data. -This specification supersedes Marine Corps Purchase Description PD-93 (MCSA) dated 15 March 1961 for Cover, Music Carrying Pouch; Embroidered.

Custodian:
Navy-MC

Preparing Activity:
Navy-MC

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:46Z
Check the source to verify that this is the current version before use.

PATTERN DRAWINGS

FIGURE 1. MUSIC POUCH COVER, U.S.M.C. BAND EMBROIDERED

MCSA DLO KLF 4 JAN '67

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:46Z
Check the source to verify that this is the current version before use.

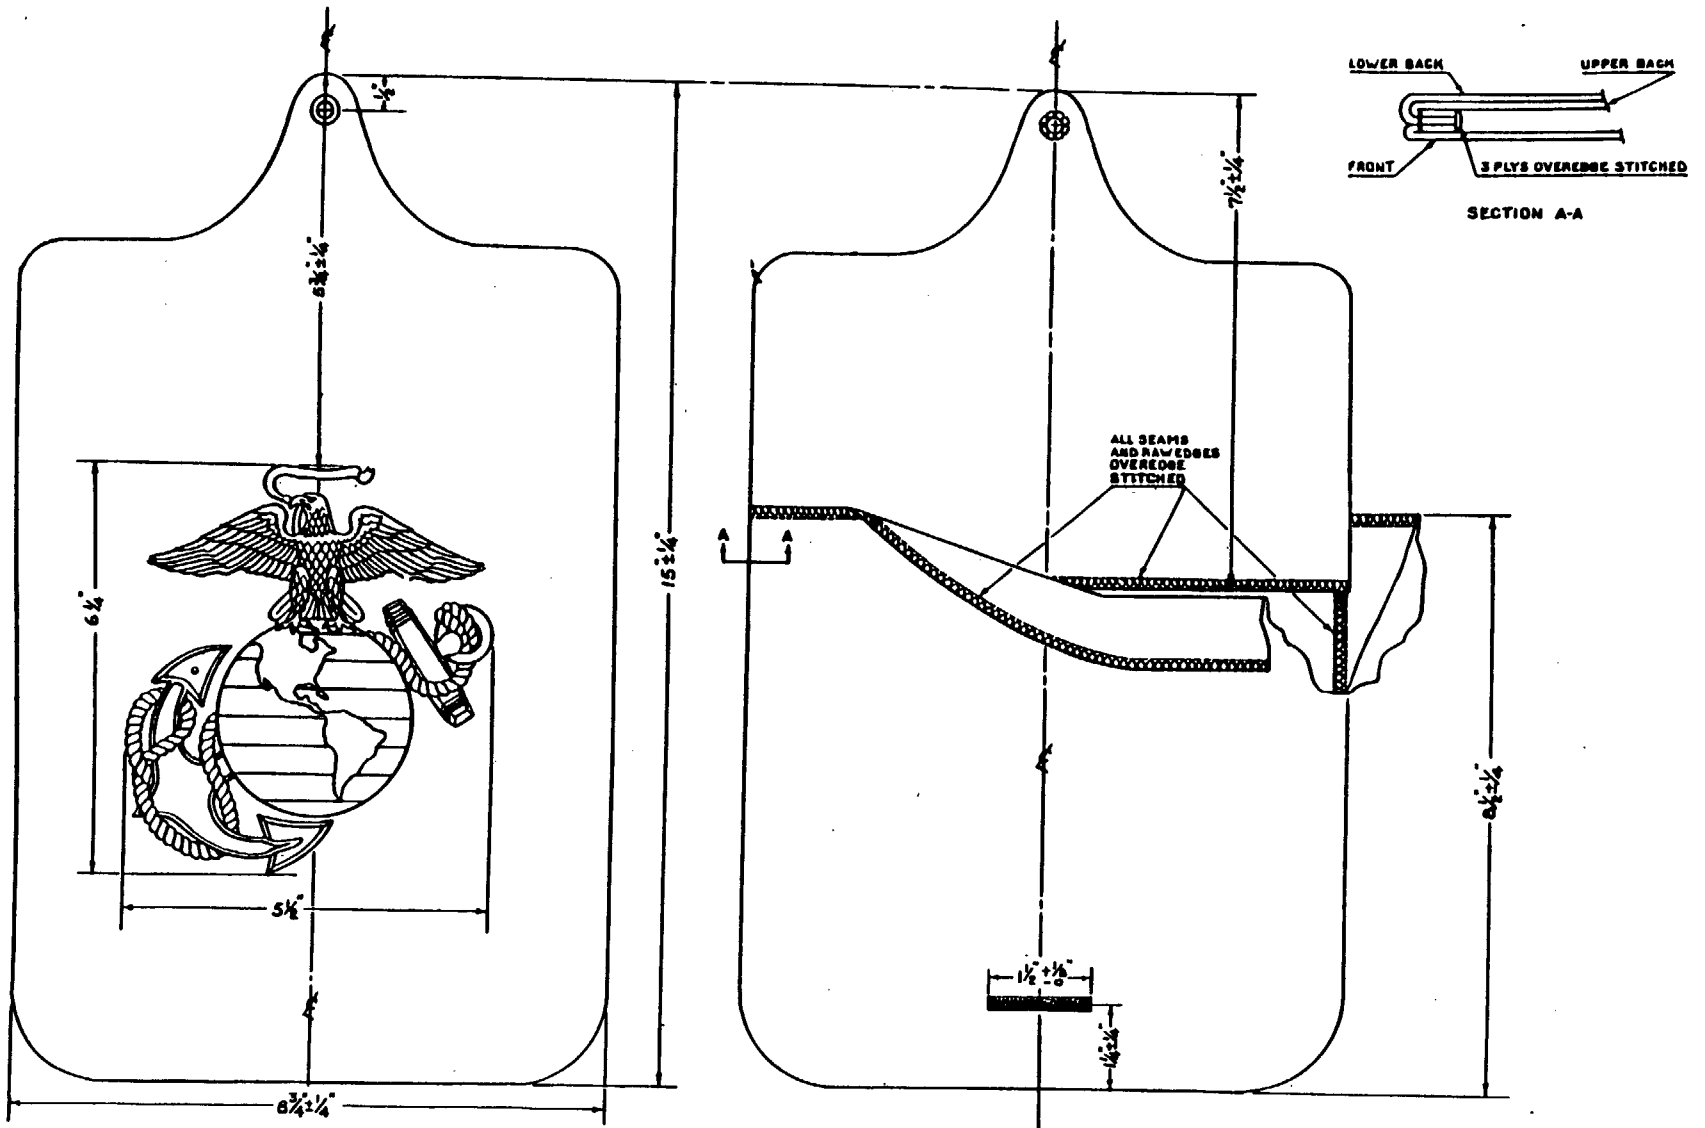


FIGURE 2. MUSIC POUCH COVER, U.S.M.C. BAND EMBROIDERED

Source: https://assist.dla.mil -- Downloaded: 2026-10-23106:402
Check the source to verify that this is the current version before use.

M.C.S.A. 826 R.F. 4 JAN '67

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 119-R004

INSTRUCTIONS

This sheet is to be filled out by personnel either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity *(as indicated on reverse hereof)*.

SPECIFICATION

ORGANIZATION *(Of submitter)*

CITY AND STATE

CONTRACT NO.

QUANTITY OF ITEMS PROCURED

DOLLAR AMOUNT
$

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES.

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO IF "YES", IN WHAT WAY?

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity)*

DATE

DD FORM 1 APR 63 1426 REPLACES NAVSHIPS FORM 4863, WHICH IS OBSOLETE PLATE NO. 15419

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:46Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY
Marine Corps Supply Activity
1100 South Broad Street
Philadelphia, Penna. 19146

OFFICIAL BUSINESS

POSTAGE AND FEES PAID
NAVY DEPARTMENT

Commanding General (8-26)
Marine Corps Supply Activity
1100 South Broad Street
Philadelphia, Pennsylvania 19146

FOLD

PLATE NO. 15419 (BACK)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:46Z
Check the source to verify that this is the current version before use.