INCH-POUND

MIL-M-51394B(EA)
24 July 1991
SUPERSEDING
MIL-M-51394A(EA)
22 December 1987

# MILITARY SPECIFICATION

# MOUNTING KIT, CHEMICAL AGENT AUTOMATIC ALARM: LOW PROFILE, ABCA-M182

*This specification is approved for use by the U.S. Army Chemical Research, Development and Engineering Center, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.*

## 1. SCOPE

**1.1 Scope.** This specification covers one type of chemical agent alarm mounting kit.

## 2. APPLICABLE DOCUMENTS

**2.1 Government documents.**

**2.1.1 Specifications, standards, and handbooks.** The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, U.S. Army Chemical Research, Development and Engineering Center, ATTN: SMCCR-PET-S, Aberdeen Proving Ground, MD 21010-5423 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 6665

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:59Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

MILITARY

MIL-P-60312 - Parts, Molded, Plastic Foam, Polystyrene (For use with Ammunition)

STANDARDS

MILITARY

MIL-STD-171 - Finishing of metal and wood surfaces.
MIL-STD-252 - Classification of Visual and Mechanical Defects for Equipment, Electronic, Wired and Other Devices
MIL-STD-810C - Environmental Test Methods
MS 3115 - Connectors, Receptacle, Electrical Dummy Stowage, Bayonet Coupling for MIL-C-26482 Connectors

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Standardization Documents Order Desk, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

**2.1.2 Other Government documents, drawings, and publications.** The following other Government documents, drawings, and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

U.S. ARMY CHEMICAL RESEARCH, DEVELOPMENT AND ENGINEERING CENTER

DRAWINGS

5-15-5300 - Mounting Kit, Chemical Agent Automatic Alarm: Low Profile, ABCA-M182
5-15-5306 - Cable Asssembly, Power, Electrical
5-15-5500 - Mount, Detector Unit, Low Profile
5-15-8777 - Overpack, Mounting Kit, M182/M228

SPECIAL PACKAGING INSTRUCTIONS (SPI)

P5-15-5300 - Mounting Kit, Chemical Agent Automatic Alarm: Low Profile, ABCA M182



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:59Z
Check the source to verify that this is the current version before use.

(Copies are available from Commander, U.S. Army Information Systems Command, ATTN: ASQNC-ARI-CT, Rock Island, IL 61229-7210.)

**2.2 Order of precedence.** In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

## 3. REQUIREMENTS

### 3.1 Materials and components.

**3.1.1 Materials.** All materials cited on Drawing 5-15-5300 or on the subsidiary drawings shall conform to the specifications listed thereon, or to the specific characteristics set forth on the drawings.

**3.1.2 Components.** All components of the mounting kit shall conform to the specifications and drawings listed on Drawing 5-15-5300 and subsidiary drawings.

**3.2 Manufacture and assembly.** The components shall be manufactured and assembled as specified on the subsidiary drawings listed on Drawing 5-15-5300.

### 3.3 Performance of cable assembly (Drawing 5-15-5306).

**3.3.1 Resistance of cable assembly (Drawing 5-15-5306).** The cable assembly shall have the resistance specified in table I when tested as specified in 4.4.6.1.

**3.3.1 Forward bias voltage drop.** Forward bias voltage drop. With 24.0 ± 2.0 volts direct current (V dc) applied at W1P2-E (+) and W1P2-B, and a 24-ohm, ± 10 percent, 50-watt minimum load resistor connected across W1P1-E and W1P1-B, the voltage across W1P1-E and W1P1-B shall be within 2.0 volts of the applied voltage when tested as specified in 4.4.6.2.

**3.3.2 Reverse bias output voltage.** With 24.0 ± 2.0 V dc applied at W1P2-B (+) and W1P2-E, and a 24-ohm, ± 10 percent, 50 watt minimum load resistor connected across W1P1-B and W1P1-E, the voltage across W1P1-B and W1P1-E shall not exceed 1.0 volt when tested as specified in 4.4.6.3.



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:59Z
Check the source to verify that this is the current version before use.

TABLE I. Resistance between test points

| From | To | Resistance (Ohms) |
|---|---|---|
| W1P2-A | W1P1-C | 1.0 Max. |
| W1P2-D | W1P1-D | 1.0 Max. |
| W1P2-A | W1P1-A | $1.0 \times 10^6$ Min. |
| W1P2-D | W1P1-A | $1.0 \times 10^6$ Min. |
| W1P1-A | W1P1-E | 1.0 Max. |
| W1P2-SHELL | W1P2-A | $1.0 \times 10^6$ Min. |
| W1P2-SHELL | W1P2-B | $1.0 \times 10^6$ Min. |
| W1P2-SHELL | W1P2-D | $1.0 \times 10^6$ Min. |
| W1P2-SHELL | W1P2-E | $1.0 \times 10^6$ Min. |
| W1P1-SHELL | W1P1-A | $1.0 \times 10^6$ Min. |
| W1P1-SHELL | W1P1-B | $1.0 \times 10^6$ Min. |
| W1P1-SHELL | W1P1-D | $1.0 \times 10^6$ Min. |
| W1P1-SHELL | W1P1-C | $1.0 \times 10^6$ Min. |



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:59Z
Check the source to verify that this is the current version before use.

3.3.3 **Ripple output.**

3.3.3.1 **Ripple output at 1.0 kilohertz (kHz).** With an alternating current (ac) signal generator having an output of 10.0 ± 0.5 volt peak-to-peak at a frequency of 1.0 ± 0.01 kHz applied as shown in figure 1, and 24.0 ± 2.0 V dc applied as shown in figure 1, the ripple present at W1P1-B and W1P1-E shall be less than 150 millivolts (mV) peak-to-peak when tested as specified in 4.4.6.5.

3.3.3.2 **Ripple output at 500 kHz.** With an ac signal generator having an output of 10.0 ± 0.5 volt peak-to-peak at a frequency of 500 ± 10 kHz applied as shown in figure 1, and 24.0 ± 2.0 V dc applied as shown in figure 1, the ripple present at W1P1-B and W1P1-E shall be less than 10 mV peak-to-peak when tested as specified in 4.4.6.6.

3.4 **Mounting kit, performance at low temperature.** The cable assembly shall meet the requirements of 3.3 after being stored at least 3 hours at a temperature of -40°± 5°F (-40°± 2.8°C) and then tested at that temperature as specified in 4.3.3.1.

3.5 **Mounting kit, performance at high temperature.** The cable assembly shall meet the requirements of 3.3 after being stored at least 3 hours at a temperature of 120° ± 5°F (48.9°± 2.8°C) and then tested at that temperature as specified in 4.3.3.2. In addition, the cable assembly shall meet the requirements of 3.3 after the cable assembly has been returned to a temperature of 75° ± 10°F (23.9°± 5.6°C) for at least 3 hours and then tested at that temperature as specified in 4.3.3.2.

3.6 **Mounting kit, performance after vibration.** When tested as specified in 4.3.3.3 with the cable assembly installed onto a detector mount (Drawing 5-15-5500) loaded with the detector and battery simulator weight shown on figure 2, the cable assembly shall meet the requirements of 3.3 after the detector mount is subjected to the vibration environment described in MIL-STD-810C, method 514, procedure VIII, curve W (6000 miles), applied along the vertical axis only of the detector mount. There shall be no physical deterioration or loose parts.

3.7 **Chemical agent resistant coating.** Chemical agent resistant coatings shall be applied in accordance with the requirements of the applicable drawings and MIL-STD-171. (see 4.4.6.7)

3.8 **First article.** Prior to the start of regular production, a first article sample of mounting kits shall be produced in accordance with this specification for examination and test (see 4.3).

3.9 **Workmanship.** The workmanship of the mounting kit shall be in accordance with MIL-STD-252.



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:59Z
Check the source to verify that this is the current version before use.


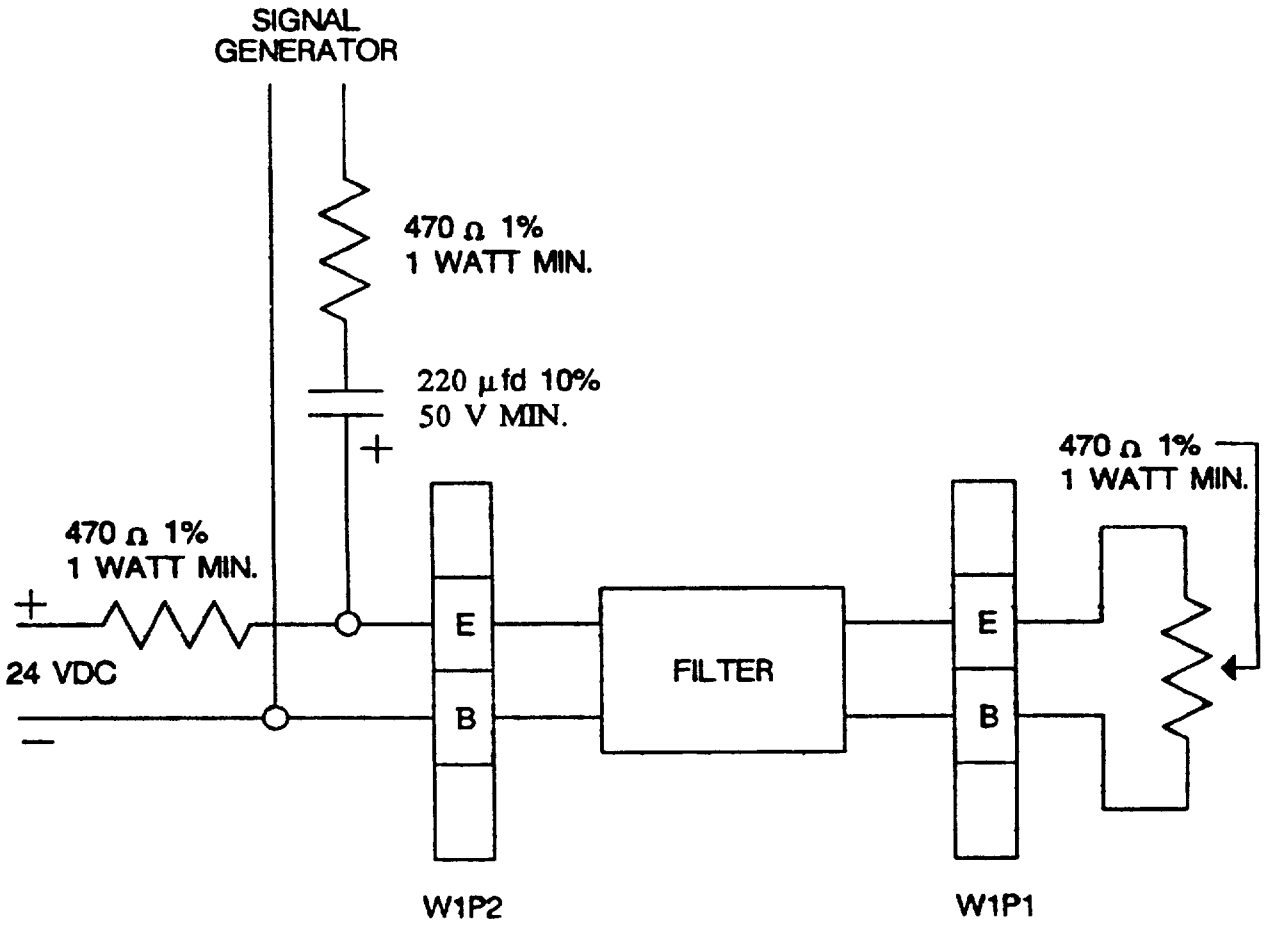



FIGURE 1. Ripple output test circuit



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:59Z
Check the source to verify that this is the current version before use.

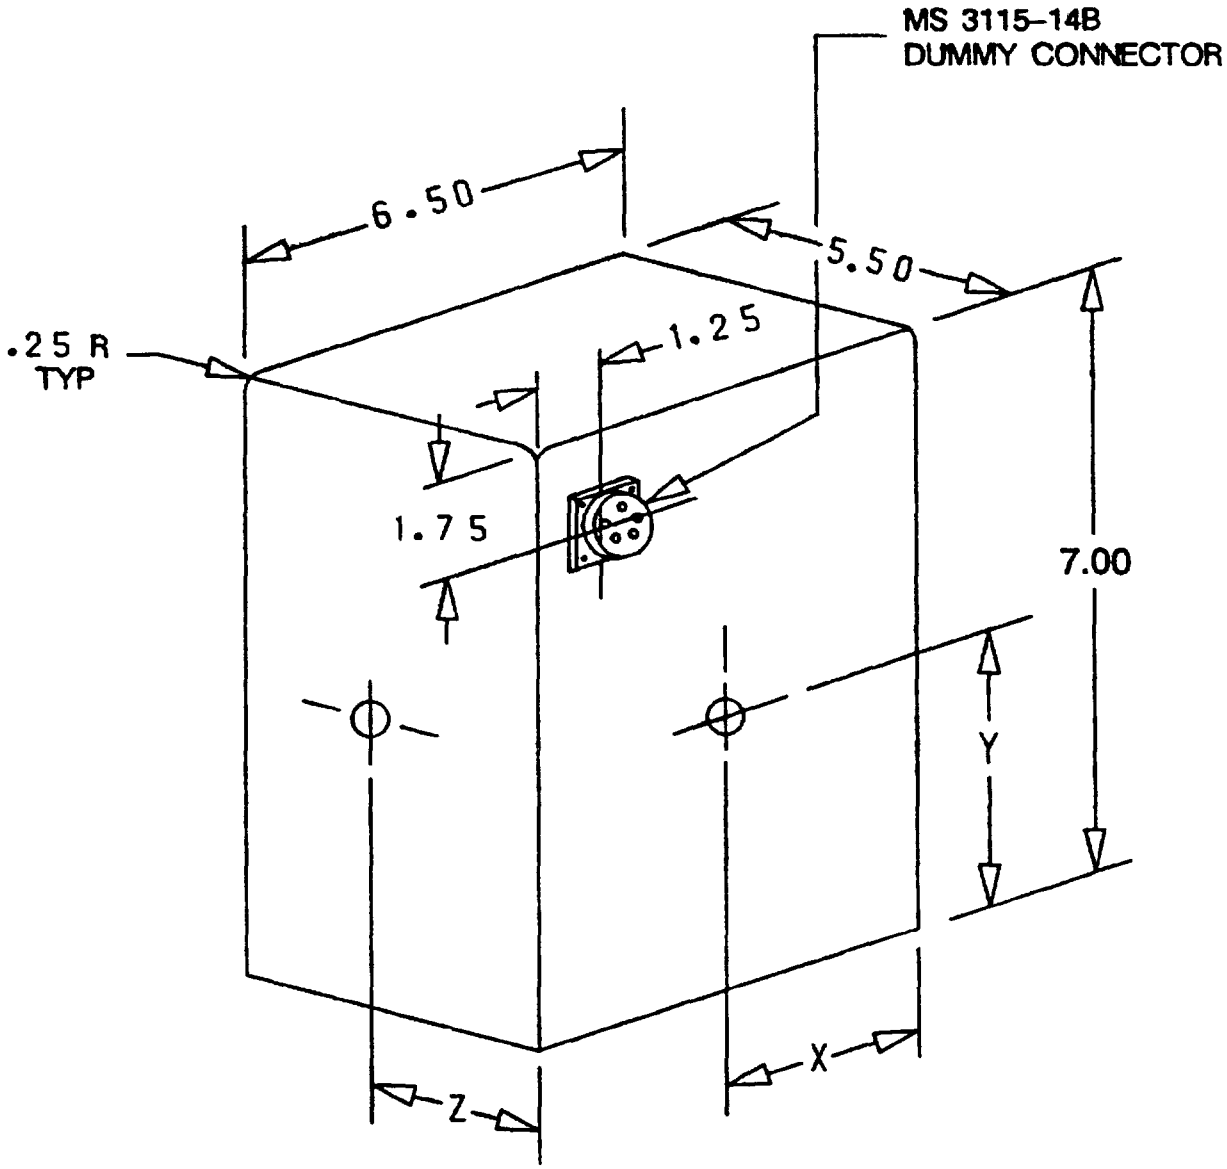


| CENTER OF GRAVITY | WEIGHT | NOTE: |
|---|---|---|
| X = 3.25 | 6 LB. 3 OZ. | DIMENSIONS ± 0.06 |
| Y = 4.12 | | WEIGHT ± 5 OZ. |
| Z = 2.75 | | |

Figure 2. Detector and battery simulator weight



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:59Z
Check the source to verify that this is the current version before use.

## 4. QUALITY ASSURANCE PROVISIONS

**4.1 Responsibility for inspection.** Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

**4.1.1 Responsibility for compliance.** All items shall meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

**4.1.2 Contractor assurance of compliance.** The contractor's quality program or detailed inspection system shall provide assurance of compliance of all characteristics with the applicable drawing, special packaging instruction, and specification requirements using, as a minimum, the conformance criteria specified herein.

**4.1.3 Alternative inspection provisions.** Alternative inspection procedures, methods, or equipment, such as statistical process control, tool control, and other types of sampling procedures may be used by the contractor when they provide, as a minimum, the level of quality assurance required by the inspection provisions specified herein. Prior to applying such alternative procedures, methods, or equipment, the contractor shall describe them in a written proposal submitted to the Government for evaluation and approval. (See 6.6.) When required, the contractor shall demonstrate that the effectiveness of each proposed alternative is equal to or better than the quality assurance provisions specified herein. In cases of dispute as to whether the contractor's proposed alternative provides equal quality assurance, the provisions of this specification shall apply. All approved alternative inspection provisions shall be specifically incorporated into the contractor's quality program or detailed inspection system, as applicable

**4.2 Classification of inspections.** The inspection requirements specified herein are classified as follows:



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:59Z
Check the source to verify that this is the current version before use.

(a) First article inspection (see 4.3)
(b) Quality conformance inspection (see 4.4)

**4.3 First article inspection.**

**4.3.1 Sample.** The first article sample shall consist of three mounting kits manufactured and packaged (when military packaging is required) using the same methods, materials, equipment, and processes as will be used during regular production and two empty unit pack containers. Empty unit pack containers shall not be part of the first article sample when packaging is for interplant shipment. The first article sample shall be submitted for inspection and approval in accordance with the terms of the contract.

**4.3.2 Inspections to be performed.** The first article sample shall be examined and tested as specified in 4.3.2.(a), 4.4.5(a), 4.4.5(b), and 4.4.5(c) and be inspected for compliance with any or all of the requirements of the applicable drawings and special packaging instructions.



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:59Z
Check the source to verify that this is the current version before use.

## CLASSIFICATION OF CHARACTERISTICS

| PARAGRAPH | TITLE | SHEET 1 OF 1 | DRAWING NUMBER 5-15-5300 |
|---|---|---|---|
| 4.3.2.(a) | Mounting kit, chemical agent automatic alarm: low profile, ABCA-M182 (First article inspection) | | NEXT HIGHER ASSY |

| CATEGORY | CHARACTERISTIC | SAMPLING AND ACCEPTANCE CRITERIA | REQUIREMENT PARAGRAPH | INSPECTION METHOD |
|---|---|---|---|---|
| **Critical** | None defined | | | |
| **Major** | | | | |
| 101 | Workmanship | 3; Acc 0, Rej 1 | 3.9 | VI |
| 102 | Performance (Cable assembly) | 3; Acc 0, Rej 1 | 3.3 | 4.4.6.1–4 4.6.6 |
| 103 | Chemical agent resistant coating | 3; Acc 0, Rej 1 | 3.7 | 4.4.6.7 |
| 104 | Mounting kit, performance at low temperature | 3; Acc 0, Rej 1 | 3.4 | 4.3.3.1 |
| 105 | Mounting kit, performance at high temperature | 3; Acc 0, Rej 1 | 3.5 | 4.3.3.2 |
| 106 | Mounting kit, performance after vibration | 3; Acc 0, Rej 1 | 3.6 | 4.3.3.3 |
| 107 | Moisture content of empty container | 2; Acc 0, Rej 1 | 5.1 | 4.4.7.1 |

NOTES:

CE – Commercial inspection equipment
VI – Visual inspection



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:59Z
Check the source to verify that this is the current version before use.

4.3.3 Tests. Test shall be performed as follows:

4.3.3.1 Mounting kit, performance at low temperature. Place the cable assembly into a temperature test chamber. Arrange the cable such that the cable ends are outside of the test chamber, or are readily accessible from outside the test chamber. Adjust the controls of the test chamber to produce the required temperature, and maintain that temperature for the required time. Then, perform the testing described in 4.4.6.2 through 4.4.6.6. The test results shall be as required.

4.3.3.2 Mounting kit, performance at high temperature. Mounting kit, performance at high temperature. Place the cable assembly into a temperature test chamber. Arrange the cable so that the cable ends are outside of the test chamber, or are readily accessible from outside the test chamber. Adjust the controls of the test chamber to produce the required higher temperature, and maintain that temperature for the required time. Then, perform the testing described in 4.4.6.2 through 4.4.6.6. The test results shall be as required. Adjust the controls of the test chamber to produce the required lower temperature, and maintain that temperature for the required time. Then, perform the testing described in 4.4.4.2 through 4.4.4.6. The test results shall be as required.

4.3.3.3 Mounting kit, performance after vibration. Install the cable assembly onto a detector mount (Drawing 5-15-5500). Install the detector mount onto a vibration exciter. Secure the detector and battery simulator weight shown on figure 2 into place in the detector mount. Connect the shorter cable length of the cable assembly to the simulator weight, and secure the longer cable length of the cable assembly to the vibration exciter within 6 inches of the detector mount. Subject the detector mount to the required vibration environment. Upon completion of the vibration, perform the testing described in 4.4.6.2 through 4.4.6.6. The test results shall be as required. Examine for physical deterioration or loose parts.

4.3.4 Acceptance criteria. If any first article sample item fails to comply with any of the applicable requirements, the first article sample shall be rejected. The Government reserves the right to terminate inspection upon any failure to comply with any of the requirements. The contractor shall obtain written approval from the contracting activity prior to proceeding with regular production.

4.4 Quality conformance inspection.

4.4.1 Lotting. A lot shall consist of the items produced by one manufacturer, at one plant, from the same materials, under essentially the same manufacturing conditions, and at essentially the same time.

4.4.2 Sampling. Sampling shall be conducted in accordance with the classification of characteristics in 4.4.5 and, when specified, table II. Samples shall be selected at random.



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:59Z
Check the source to verify that this is the current version before use.

TABLE II. Sampling

| Lot size | Inspection levels and sample sizes | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | I | II | III | IV | V | VI | VII | VIII | IX | X | XI |
| 2 to 8 | * | * | * | * | * | * | * | * | 5 | 3 | 2 |
| 9 to 15 | * | * | * | * | * | * | 13 | 8 | 5 | 3 | 2 |
| 16 to 25 | * | * | * | * | * | 20 | 13 | 8 | 5 | 3 | 3 |
| 26 to 50 | * | * | * | * | 32 | 20 | 13 | 8 | 5 | 5 | 5 |
| 51 to 90 | * | * | * | 50 | 32 | 20 | 13 | 8 | 7 | 6 | 5 |
| 91 to 150 | * | * | 125 | 50 | 32 | 20 | 13 | 12 | 11 | 7 | 6 |
| 151 to 280 | * | * | 125 | 50 | 32 | 20 | 20 | 19 | 13 | 10 | 7 |
| 281 to 500 | * | 315 | 125 | 50 | 48 | 47 | 29 | 21 | 16 | 11 | 9 |
| 501 to 1200 | * | 315 | 125 | 75 | 73 | 47 | 34 | 27 | 19 | 15 | 11 |
| 1201 to 3200 | 1250 | 315 | 125 | 116 | 73 | 53 | 42 | 35 | 23 | 18 | 13 |
| 3201 to 10000 | 1250 | 315 | 192 | 116 | 86 | 68 | 50 | 38 | 29 | 22 | 15 |
| 10001 to 35000 | 1250 | 315 | 294 | 135 | 108 | 77 | 60 | 46 | 35 | 29 | 15 |
| 35001 to 150000 | 1250 | 490 | 294 | 170 | 123 | 96 | 74 | 56 | 40 | 29 | 15 |
| 150001 to 500000 | 1250 | 715 | 345 | 200 | 156 | 119 | 90 | 64 | 40 | 29 | 15 |
| 500001 and over | 1250 | 715 | 435 | 244 | 189 | 143 | 102 | 64 | 40 | 29 | 15 |

*Indicates one hundred percent inspection. If sample size exceeds lot size, perform one hundred percent inspection.
Accept the lot represented on zero nonconforming characteristics and reject the lot represented on one or more nonconforming characteristics for all inspection levels.

**4.4.3 Inspection procedure.** Every item in the lot shall be inspected for critical characteristics. The lot represented shall be rejected when nonconformance to a critical characteristic is found. Sample items and, when applicable, the packaging thereof shall be examined and tested in accordance with the classification of characteristics in 4.4.5. Failure of any sample item to conform to any characteristic in the classification of characteristics based on the sampling and acceptance criteria specified therein shall be cause for rejection of the lot represented.

**4.4.4 Inspection characteristics.** Critical characteristics are characteristics whose nonconformance to specified requirements is likely to result in hazardous or unsafe conditions for individuals using, maintaining, or depending upon the product or whose nonconformance to specified requirements is likely to prevent performance of the tactical function of a major end item. Major characteristics are characteristics whose nonconformance to specified requirements is likely to result in failure or to reduce materially the usability of the



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:59Z
Check the source to verify that this is the current version before use.

item for its intended purpose. Minor characteristics are characteristics whose nonconformance to specified requirements is not likely to reduce materially the operation or usability of the item for its intended purpose.

4.4.5 **Classification of characteristics.** Quality conformance examinations and tests shall be as specified in the following classification of characteristics paragraphs. When specified herein, accept on 0 and reject on 1 attributes sampling inspection shall be performed on the designated characteristics using the stated levels in table II for selection of sample sizes.



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:59Z
Check the source to verify that this is the current version before use.

## CLASSIFICATION OF CHARACTERISTICS

| PARAGRAPH | TITLE | SHEET 1 OF 1 | DRAWING NUMBER 5-15-5300 |
|---|---|---|---|
| 4.4.5(a) | Mounting kit, chemical agent automatic alarm: low profile, ABCA M182 | | NEXT HIGHER ASSY |

| CATEGORY | CHARACTERISTIC | SAMPLING AND ACCEPTANCE CRITERIA | REQUIREMENT PARAGRAPH | INSPECTION METHOD |
|---|---|---|---|---|
| Critical | None defined | | | |
| Major | | | | |
| 101 | Workmanship | Table II, level VII | 3.9 | VI |
| 102 | Assembly complete and correct | Table II, level VII | 3.2 | VI |

NOTES:
CE - Commercial inspection equipment
VI - Visual inspection



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:59Z
Check the source to verify that this is the current version before use.

## CLASSIFICATION OF CHARACTERISTICS

| PARAGRAPH 4.4.5(b) | TITLE Cable Assembly, Power, Electrical | SHEET 1 OF 1 | DRAWING NUMBER 5-15-5306 / NEXT HIGHER ASSY |
|---|---|---|---|

| CATEGORY | CHARACTERISTIC | SAMPLING AND ACCEPTANCE CRITERIA | REQUIREMENT PARAGRAPH | INSPECTION METHOD |
|---|---|---|---|---|
| Critical | None defined | | | |
| Major | | | | |
| 101 | Performance | 100% Inspection | 3.3 | 4.4.6.1–4.4.6.6 |

NOTES: Commercial inspection equipment
VI - Visual inspection



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:59Z
Check the source to verify that this is the current version before use.

## CLASSIFICATION OF CHARACTERISTICS

| PARAGRAPH | TITLE | SHEET 1 OF 1 | DRAWING NUMBER |
|---|---|---|---|
| 4.4.5(c) | Packaging | | SPI P5-15-5300 |
| | | | NEXT HIGHER ASSY |

| CATEGORY | CHARACTERISTIC | SAMPLING AND ACCEPTANCE CRITERIA | REQUIREMENT PARAGRAPH | INSPECTION METHOD |
|---|---|---|---|---|
| **Critical** | None defined | | | |
| **Major** | | | | |
| 103 | Moisture content of empty container | 2; Acc 0, rej 1* | 5.1 | 4.4.7.1** |
| 104 | Item completely clean and dry prior to unit packing | Table II, level IX | 5.1 | VI |
| 105 | Unit pack components assembled correctly | Table II, level IX | 5.1 | VI and CE |
| 106 | Unit pack container evident and correct | Table II, level IX | 5.1 | VI and CE |
| 107 | Packing evident and correct | Table II, level IX | 5.1 | VI and CE |
| 108 | Unit pack container marking correct evident and legible | Table II, level IX | 5.1 | VI and CE |

NOTES:

This paragraph is not applicable to packaging for interplant shipment.

* Samples shall consist of closed empty unit pack containers

** Destructive test

CE - Commercial inspection equipment

VI - Visual inspection



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:59Z
Check the source to verify that this is the current version before use.

**4.4.6 Tests.** Tests shall be conducted as follows.

**4.4.6.1 Resistance of cable assembly.** Connect an ohmmeter having an accuracy of ± 2° of arc on the R x 1 scale and 1.5° of arc on the R x 100 and R x 10K scales successively to each pair of test points listed in table I. The resistance measured at each pair of test points shall be as required.

**4.4.6.2 Forward bias voltage drop.** Connect the load resistor described in 3.3.1 across W1P1-E and W1P1-B. Connect the required dc power source across W1P2-E and W1P2-B. The positive terminal of the power source must be connected to W1P2-E. Connect a voltmeter of suitable range having an accuracy of 2.0 percent full scale deflection between W1P1-B and W1P1-E, with the plus terminal of the voltmeter at W1P1-E. The indicated voltage shall be as required.

**4.4.6.3 Reverse bias voltage drop.** Connect the load resistor described in 3.3.2 and a dc voltmeter of suitable range having an accuracy of 2.0 percent full scale deflection across W1P1-B and W1P1-E. The positive terminal of the voltmeter must be connected to W1P1-B. Connect the dc power source required by 3.3.2 across W1P2-B and W1P2-E. The positive terminal of the power source must be connected to W1P2-B. The indicated voltage shall be as required.

**4.4.6.4 Output voltage.** Connect the current-limiting resistor required by 3.3.3 between the positive terminal of the 50-volt power source and W1P2-E Connect the negative terminal of the power source to W1P2-B. Connect a voltmeter of suitable range having an accuracy of 2.0 percent full scale deflection across W1P1-E and W1P1-B. The positive terminal of the voltmeter must be connected to W1P1-E. The indicated voltage shall be as required.

**4.4.6.5 Ripple output at 1.0 kHz.** Ripple output at 1.0 kHz. Connect the cable into the test circuit shown in figure 1. Adjust the dc source and the signal generator to the outputs required by 3.3.3.1. Connect a suitable oscilloscope to W1P1-B and W1P1-E and measure the ripple present. The ripple shall be as required.

**4.4.6.6 Ripple output at 500 kHz.** Connect the cable into the test circuit shown in figure 1. Adjust the dc source and the signal generator to the outputs required by 3.3.3.2. Connect a suitable oscilloscope to W1P1-B and W1P1-E and measure the ripple present. The ripple shall be as required.

**4.4.6.7 Chemical agent resistant coating.** Chemical agent resistant coating shall be inspected and accepted in accordance with applicable paragraphs of section 6 of MIL-STD-171.



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:59Z
Check the source to verify that this is the current version before use.

**4.4.7 Packaging tests.**

**4.4.7.1 Moisture content.** Prior to packaging the mounting kit as defined on SPI P5-15-5300, determine the moisture content of the polystyrene containers (Drawing 5-15-8777) in accordance with MIL-P-60312, except that the sampling and acceptance/rejection criteria shall be as specified herein.

## 5. PACKAGING

**5.1 Interplant shipment (6.4).** Military packaging as specified in 5.2 is not applicable for interplant shipments. the mounting kit shall be packed to provide adequate protection from physical damage, and marked to identify the mounting kit and any other required data during shipment from the source to the first receiving activity.

**5.2 Repair or replacement parts.** For all shipments, other than interplant shipments (see 6.4) packaging (preservation, unit packing and marking) shall be as specified in SPI P5-15-5300.

## 6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

**6.1 Intended use.** The mounting kit provides a means of securely mounting the detector unit and the alarm unit of the ABCA-M8 chemical agent automatic alarm onto certain vehicles, providing shock and vibration isolation for both of these units.

**6.2 Acquisition requirements.** Acquisition documents must specify the following:

(a) Title, number, and date of this specification
(b) Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1.1)
(c) First article.

(1) Time allowed for contractor submission of samples for Government test and evaluation after award of contract when testing is performed by the Government.
(2) Name and address of test facility and shipping instructions when testing is performed by the Government.
(3) Time required for the Government to notify the contractor whether or not to proceed with production.
(d) Whether military packing or interplant shipment packaging is required
(e) Level of packing required
(f) Palletization required (see section 5)



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:59Z
Check the source to verify that this is the current version before use.

**6.3 First article.** When first article inspection is required, the contracting officer should provide specific guidance to offerors whether the item(s) should be a preproduction sample, a first article sample, a first production item, a sample selected from the first ___ production items, a standard production item from the contractor's current inventory, and the number of items to be tested as specified in 4.3. The contracting officer should also include specific instructions in acquisition documents regarding arrangements for examinations, approval of first article test results, and disposition of first articles. Invitations for bids should provide that the Government reserves the right to waive the requirement for samples for first article inspection to those bidders offering a product which has been previously acquired or tested by the Government, and that bidders offering such products, who wish to rely on such production or test, must furnish evidence with the bid that prior Government approval is presently appropriate for the pending contract. Bidders should not submit alternative bids unless specifically requested to do so in the solicitation.

**6.4 Interplant shipment.** Packaging and marking for interplant shipment is for supplies and materials that do not directly enter the military supply system. Typical interplant shipments are shipments from vendor to a subcontractor or a prime contractor, or between contractors and subcontractors, or from a vendor to a military arsenal, plant or other activity for evaluation, immediate use, or further processing as specified in the applicable contract.

**6.5 International interest.** Certain provisions of this specification are the subject of international standardization agreement QSTAG 251. When amendment, revision, or cancellation of this specification is proposed which will modify the international agreement concerned, the preparing activity will take appropriate action through international standardization channels including departmental standardization offices to change the agreement or make other appropriate accommodations.

**6.6 Submission of alternative inspection provisions.** Proposed alternative inspection provisions should be submitted by the contractor to the procuring contracting officer for evaluation and approval by the technical activity responsible for preparation of this specification.

**6.7 Changes from previous issues.** Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

**6.8 Subject term (key word) listing.**

**Alarm, chemical agent**
**Mounting kit**
**Detector, chemical agent**



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:59Z
Check the source to verify that this is the current version before use.

Custodian:

Army - EA

Preparing activity:

Army - EA

Project No. 6665-A632



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:59Z
Check the source to verify that this is the current version before use.