INCH-POUND

MIL-P-82868(OS)
13 May 1992
SUPERSEDING
WS 16100C
2 February 1977

MILITARY SPECIFICATION

PRIMER, PERCUSSION, MK 161 MOD 0

This specification is approved for use by the Naval Sea Systems Command, Department of the Navy and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification establishes the minimum requirements for the Percussion Primer, MK 161 MOD 0, herein referred to as the "primer".

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications and standards. The following specifications and standards form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

FEDERAL

PPP-B-636 Boxes, Shipping, Fiberboard

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, Indian Head Division, Naval Surface Warfare Center, Standardization Branch (Code 3730), Indian Head, MD 20640-5035 by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or sending a letter.

AMSC N/A FSC 1390

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202610-23T07:29Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-D-3464	Desiccants, Activated, Bagged, Packaging Use and Static Dehumidification

STANDARDS

MILITARY

MIL-STD-129	Marking for Shipment and Storage
MIL-STD-331	Fuze and Fuze Components, Environmental and Performance Tests for
MIL-STD-453	Inspection, Radiographic
MIL-STD-1167	Ammunition Data Card
MIL-STD-1168	Ammunition Lot Numbering
DOD-STD-2101	Classification of Characteristics

(Unless otherwise indicated, copies of federal and military specifications and standards are available from the Standardization Documents Order Desk, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues shall be those cited in the solicitation.

DRAWINGS

NAVAL SEA SYSTEMS COMMAND (CAGE Code 10001 or 53711)

LD 166537	Test Set, MK 135 MOD 0
2494528	Test Fixture Assembly
2645160	Shipping Condition for Primers, MK 161 MOD 0
2645488	Palletizing Domestic Unit Load
3028626	Primer, Percussion, Assembly, MK 161 MOD 0
3028693	Firing Pin For Test Set, MK 135 MOD 0
3028694	Head Assembly Adapter, 76mm, For Test Set MK 135 MOD 0

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:29Z
Check the source to verify that this is the current version before use.

5367224 Cartridge, 76mm/62 Caliber, Test Assembly

(Application for copies of NAVSEA drawings should be addressed to: Commanding Officer, Naval Ordnance Station, Crane Division, Naval Surface Warfare Center, Attn: Code 802, Louisville, KY 40214-5001.)

NAVAL SURFACE WARFARE CENTER, INDIAN HEAD DIVISION (CAGE Code 14083)

MT SK 834 Pressure Bomb for Primer, Percussion, 76mm/62 Caliber

(Application for drawing should be addressed to: Commander, Naval Surface Warfare Center, Indian Head Division, Data Control Branch (Code 3720), 101 Strauss Avenue, Indian Head, MD 20640-5035.)

PUBLICATIONS

NAVAL SEA SYSTEMS COMMAND (CAGE CODE 10001)

OD 5823 Sensitivity Test of Primers and Detonators

(Application for copies of ODs should be addressed to: Commander, Port Hueneme Division, Naval Surface Warfare Center, NAVSEA Data Support Activity (Code 5H30), Port Hueneme, CA 93043.)

CODE OF FEDERAL REGULATIONS (CFR)

49 CFR 100-199 Transportation

(Copies of CFRs are available from the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402.)

2.2 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 First article. When specified (see 6.2), a sample shall be subjected to first article inspection (see 6.4) in accordance with 4.4.

3.2 Characteristics. The primer shall conform to the requirements specified herein and on Drawing 3028626.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:29Z
Check the source to verify that this is the current version before use.

3.3 Radiographic (M101). The primer shall not exhibit any loose components (except black powder), missing, or extra parts. Primers exhibiting possible defects shall be included in the detail strip sample and meet the requirements of 3.5 (see 4.7.1).

3.4 Black powder moisture content (M102). The moisture content of the black powder within the primer shall not exceed 0.70 percent by weight (see 4.7.2).

3.5 Detail strip. The primer and all its components shall conform to the following requirements (see 4.7.3):

a. **(C1)** Each critical characteristic shall be as specified in the applicable documents listed on Drawing 3028626 and this specification.

b. **(M103)** Each major characteristic shall be as specified in the applicable documents listed on Drawing 3028626 and this specification.

3.6 No-fire (C2). The primer shall not fire in the no-fire test (see 4.7.4).

3.7 Functional (closed bomb) and all-fire. The primer shall meet the following criteria (see 4.7.5):

a. **(M104)** The primer shall meet the closed bomb performance requirements listed in table I.

b. **(M105)** The primer shall not misfire (see 6.7.2);

c. **(M106)** The primer shall not exhibit blowback (see 6.7.3); and

d. **(C3)** The primer shall not exhibit a split stock, split tube or detachment of metallic parts.

TABLE I. Closed bomb performance requirements.

Parameter	Requirement
Pressure delay time, t_{dp}, ms	<7.0
Peak chamber pressure, Ppeak, psi, upper limit	1300
lower limit	800
Time to 90% Ppeak, t_{eff}, ms	<15.0
Pressure time trace slope, dp/dt, kpsi/ms	<1.25

3.8 Vibration. The primer shall meet the following requirements (see 4.7.6):

Source: https://assist.dla.mil -- Downloaded: 202610-23T07:29Z
Check the source to verify that this is the currentversion before use.

a. **(C4)** The primer shall not function during vibration;

b. **(C5)** The stock and tube shall maintain material integrity, and the primer shall maintain assembly integrity at the mating threads of the stock and tube during vibration;

c. **(M107)** The primer shall not otherwise physically break down during vibration; and

d. The primer shall meet the requirements of 3.7 after vibration.

3.9 Ballistics. The primer shall provide ignition which will meet the criteria of 3.7b., c., and d. and the following (see 4.7.7):

a. **(M108)** The ejection time of the projectile from the gun barrel shall not be greater than 0.050 second after application of firing energy.

3.10 Workmanship. All parts shall be free of chips, dirt, grease, rust, and all other foreign materials. There shall be no burrs or other imperfections of manufacture which would affect the assembly, functioning or handling of the product. The cleaning methods used shall not be injurious to any of the parts, nor shall the parts be contaminated by the cleaning agents. All markings shall be legible.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein except the ballistic test. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items shall meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.4)

Source: https://assist.dla.mil -- Downloaded: 202610-23T07:29Z
Check the source to verify that this is the current version before use.

b. Quality conformance inspection (see 4.5).

4.3 Test and examination methods (see 6.2). Primers shall be selected at random for each test or examination. Identification of each primer's complete test and examination results shall be secured for additional examination until otherwise directed by the contracting activity (see 6.6).

4.4 First article inspection. The first article shall be a homogeneous sample of 200 assembled primers and five each of every component part and subassembly (less explosive components) fabricated, packaged, and packed in accordance with the requirements of this specification and the contract, using the methods and procedures to be used for production. This sample is in addition to those primers required for contractor inspection and tests. The first article shall be submitted to the facility designated in the contract or order for test and examination in accordance with the first article inspection plan of table II (see 6.2 and 6.4). Prior to delivery, a first article shall be inspected and tested by the contractor for all requirements specified herein.

4.4.1 First article sample rejection. Failure of the first article sample to meet any of the requirements specified herein shall be cause for rejection of the sample.

4.5 Quality conformance inspection.

4.5.1 Lot formation. Unless otherwise specified in the contract or order (see 6.2), production lots shall consist of not more than 20,000 homogeneous primers plus those required for inspection (see 4.5.2). Each inspection lot shall contain only one Class 4 black powder lot. Failure of the quality conformance sample to meet any of the requirements specified herein shall be cause for rejection of the sample.

4.5.2 Sampling for inspection. Unless otherwise specified in the contract or order (see 6.2), 200 samples shall be selected at random from each production lot for test and examination in accordance with the quality conformance inspection plan specified in table II. This sample is in addition to those primers required for contractor inspection and tests.

4.6 Classification of characteristics. The characteristics verified by the tests and examinations herein are classified as critical, major, or minor in accordance with DOD-STD-2101. Requirements for critical characteristics are identified by the symbol (C) and major characteristics by the symbol (M). The number following the classification symbol indicates the serial number of the characteristic. Requirements not annotated with a classification code are classified as minor.

4.7 Methods of inspection.

4.7.1 Radiographic inspection. The primer shall be subjected to a radiographic inspection in accordance with MIL-STD-453. The primer shall be mounted in the vertical position with the primer stock up and X-rayed perpendicular to its axis, focused at a point 0.25 $\pm$ 0.20 inch from the stock face. Any primer which meets the requirements of 3.3 but appears to have been misassembled shall be subjected to detail strip and shall meet the requirements of 3.5.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:29Z
Check the source to verify that this is the current version before use.

TABLE II. First article and quality conformance inspection plan.

Test or Examination	Requirement Paragraph	Test Paragraph	First Article Inspection			Quality Conformance Inspection		
			Sample Size	Acceptance Criteria	Rejection Criteria	Sample Size	Acceptance Criteria	Rejection Criteria
Radiographic	3.3	4.7.1	200[1]	0	1	200[1]	0	1
No-fire	3.6	4.7.4	75	0	1	75	0	1
Functional (closed bomb) and all-fire	3.7 4.7.5		25	0	1	20	0	1
Performance	a. 4.7.5			0	1		0	1
Misfire	b. 4.7.5			0	1		0	1
Blowback	c. 4.7.5			0	1		0	1
Split stock, split tube, or detachment of metallic parts	d.							
Vibration	3.8		9			9		
Non-functional	a. 4.7.6			0	1		0	1
Material integrity	b. 4.7.6			0	1		0	1
Other breakdowns	c. 4.7.6			0	1		0	1
Requirements after vibration	d. 4.7.5			0	1		0	1
Ballistic	3.9	4.7.7	20	0	1			
Detail strip	3.5		56			56		
Critical characteristics	a. 4.7.3		56	0	1	56	0	1
Major characteristics	b. 4.7.3		40	0	1	40	0	1
Black powder moisture	3.4	4.7.2	5[2]	0	1	5[2]	0	1
Packaging, packing & marking	Section 5	4.7.8	2 pk	0	1	2 pk	0	1

[1] Radiographic examination shall be performed on all samples prior to any other test or examination.

[2] Samples shall be taken from those for the detail strip examination.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:29Z
Check the source to verify that this is the current version before use.

4.7.2 Determination of moisture content. Moisture analysis procedure for the black powder shall be as follows:

a. Ten grams (10g) of black powder from each sample primer shall be tested in the granular form for moisture content.

b. The black powder shall be removed from primer tubes and placed in a dry container with a tight cover. Black powder must not be exposed to the atmosphere for more than 3 minutes.

c. Sample containers must be covered and placed in a desiccator until ready to test the moisture content.

d. Carefully weigh 2.0 $\pm$ 0.1 g of sample into a tared weighing dish or container. The sample shall be weighed to the nearest 0.1 mg. The black powder must not be exposed to the atmosphere for more than 3 minutes.

e. Uncovered samples shall then be placed in an oven at 70 to 75 degrees Celsius (°C). Do not draw vacuum.

f. After 4 hours minimum, remove samples from the oven, cover, and place in a desiccator to cool. After cooling, carefully weigh the samples to the nearest 0.1 mg. Calculate the percent moisture as follows:

$$\text{Percent moisture} = \frac{E}{C} \times 100$$

where $C = A - B$

$E = A - D$

and

A = sample weight plus container weight, undried, g

B = undried container weight, g

C = undried sample weight, g

D = sample weight plus container weight, after drying, g

E = weight difference, after drying, g

4.7.3 Detail strip. The primer shall be disassembled to determine conformance to all the discernible critical and major characteristics specified on the applicable documents. All inspections shall be performed at the highest level of assembly possible.

Source: https://assist.dla.mil -- Downloaded: 202610-23T07:29Z
Check the source to verify that this is the currentversion before use.

4.7.4 No-fire. The primer stock assembly (see 6.7.1) shall be assembled into Test Set MK 135 MOD 0 (LD 166537) and tested in accordance with the appropriate procedures of OD 5823 using the test equipment specified below. The ball drop height shall be two inches.

a. Firing pin; Drawing 3028693

b. Primer stock assembly adapter; Drawing 3028694

c. Test fixture; Drawing 2494528

d. Steel ball approximately 2.169 inches diameter, 24.00 ± 0.02 ounces.

4.7.5 Functional (closed bomb) and all-fire test. A closed bomb, conforming to Drawing MT SK 834 or an equivalent bomb previously approved by the contracting activity, shall be used. The primer assembly shall be assembled into the bomb and tested using the appropriate procedures of OD 5823. A steel ball weighing 24.00 ± 0.02 ounces shall be dropped from a height of 12 inches onto the firing pin to initiate the primer. Instrumentation having at least the following accessories shall be used to record test data during this test:

a. Time measurement within ± 0.5 percent of true values

b. Pressure measurements within ± 1.0 percent of true values.

4.7.5.1 Procedure. Primers shall have been conditioned at 90 ± 3°F for at least 4 hours prior to testing. The primer shall be loaded into the closed bomb and fired within 3 minutes after removal from the conditioning box. The input energy to the firing plug shall be 1.5 + 0.1, -0.0 foot-pounds. The firing pin shall conform to Drawing 3028693 or equivalent if previously approved by the contracting activity. Pressure versus time shall be recorded. Measure and record the following (see 6.7 for definitions);

a. Pressure delay time, t_{dp}, milliseconds (ms)

b. Peak chamber pressure, Ppeak, pounds per square inch (psi)

c. Time to 90% Ppeak, t_{eff}, ms

d. Pressure time trace slope, dp/dt, kpsi/ms (see figure 1)

4.7.6 Vibration. The primer shall be subjected to the transportation vibration test of MIL-STD-331, Test B1, Section 6.1.2, Table B1-4, except that the orientation of each primer during this three- phase test shall be as follows:

a. Phase I: Primer axis horizontal.

b. Phase II: Primer axis vertical, primer stock down.

c. Phase III: Primer axis vertical, primer stock up.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:29Z
Check the source to verify that this is the current version before use.

The primer shall be marked with a line in the axial direction at the junction of the stock and tube indexing their initial relative position, in order to determine the integrity after vibration. The primer shall be rigidly mounted to the vibration table at the primer stock. After vibration, the primer shall be subjected to the tests of 4.7.5.

4.7.7 Ballistics. The primer shall be assembled into a 76mm primer test assembly cartridge in accordance with Drawing 5367224. All components shall be from service acceptable lots. The propellant shall be conditioned at 90 ± 15°F for 24 hours minimum prior to assembly of the propelling charge. All other components shall be conditioned at 85 ± 20°F for 24 hours minimum prior to assembly of the propelling charge. The assembled propelling charge shall be conditioned at 90 ± 5°F for 48 hours minimum immediately prior to firing. The rounds shall be fired in a 76mm/62 caliber percussion fired gun with a first quarter life barrel. Projectile ejection time shall be recorded.

4.7.8 Inspection of packaging. The packaging, packing, and marking shall be visually examined for conformance to section 5.

5. PACKAGING

5.1 Packaging (Level A). The primer shall be packaged in accordance with Drawing 2645160. Eight units of desiccant, conforming to Type I of MIL-D-3464, shall be placed in each container prior to securing the cover.

5.1.1 Inert components. Components and subassemblies shall be packaged in commercial fiberboard containers meeting the requirements of PPP-B-636. Each container shall incorporate corrugated or solid fiberboard dividers or collars suitable for preventing damage in handling and transportation. The gross weight of the contents shall not be greater than 70 pounds.

5.2 Packing (Level A). Primers packaged in accordance with 5.1 shall be packed in accordance with Drawing 2645160.

5.3 Palletization. Palletization of primers packed in accordance with 5.2 shall be in accordance with Drawing 2645488.

5.4 Marking. In addition to any special marking required by the contract or purchase order (see 6.2), all markings shall be in accordance with MIL-STD-129 and 49 CFR 171-178.

5.5 Ammunition data cards. When specified in the contract or purchase order (see 6.2), one ammunition data card prepared in accordance with MIL-STD-1167 shall be placed in the top of each pack (see 5.1), two shall be forwarded to the contracting activity, and two shall go to the ammunition depot receiving the primers. For Navy acquisition, two data cards shall also go to each of the activities listed in 6.6 (see 6.3).

5.6 Ammunition lot number. Ammunition lot number shall be in accordance with MIL-STD-1168.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful but is not mandatory).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:29Z
Check the source to verify that this is the current version before use.

6.1 Intended use. The MK 161 MOD 0 Percussion Primer is intended for use as an initiator in the 76mm/62 caliber percussion fired ammunition.

6.2 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number, and date of this specification.

b. Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1.1 and 2.1.2).

c. Whether a first article sample is required (see 3.1).

d. The facility designated to perform first article inspection (see 4.4).

e. The facility designated to perform quality conformance inspection if other than the contractor (see 4.1).

f. Inspection lot quantity if other than as specified in 4.5.1.

g. Inspection lot sample quantity if other than as specified in 4.5.2.

h. Test and examination procedures and equipment to be used (see 4.3, 6.3 and 6.6).

i. Special marking, if required (see 5.4).

j. Ammunition data cards (see 5.5 and 6.3).

k. Safety precautions (see 6.5).

6.3 Consideration of data requirements. The following data requirements should be considered when this specification is applied on a contract. The applicable Data Item Descriptions (DID's) should be reviewed in conjunction with the specific acquisition to ensure that only essential data are requested/provided and that the DID's are tailored to reflect the requirements of the specific acquisition. To ensure correct contractual application of data requirements, a Contract Data Requirements List (DD Form 1423) must be prepared to obtain the data, except where DOD FAR Supplement 27.475-1 exempts the requirement for a DD Form 1423.

Reference paragraph	DID Number	DID Title
4.3	DI-NDTI-80603	Test Procedure
5.5	DI-MISC-80043	Ammunition Data Card

The above DID's were cleared as of the date of this specification. The current issue of DOD 5010.12-L, Acquisition Management Systems and Data Requirements Control List (AMSDL), must be researched to ensure that only current, cleared DID's are cited on the DD Form 1423.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:29Z
Check the source to verify that this is the current version before use.

6.4 First article. When a first article sample is required, it should consist of 200 assembled primers and five each of every component part and subassembly (less explosive components). The contracting officer should provide specific instructions in acquisition documents regarding arrangements for examinations, approval of first article test results and disposition of first articles. Invitations for bids should provide that the Government reserves the right to waive the requirement for samples for first article inspection to those bidders offering such products which have been previously acquired or tested by the Government, and that bidders offering such products, who wish to rely on such production or test, must furnish evidence with the bid that prior Government approval is presently appropriate for the pending contract. Bidders should not submit alternate bids unless specifically requested to do so in the solicitation.

6.5 Safety precautions. The safety precaution requirements of the "Contractor's Safety Manual for Ammunition, Explosives and Related Dangerous Material" (DOD 4145.26M) are applicable and should be specified in the contract as required by the Federal Acquisition Regulation (FAR) 23.3.
NOTE: When this document is used as part of the description of work to be accomplished by a Government activity, the safety precaution requirements of "Ammunition and Explosives Ashore" (OP5) should be made applicable.

6.6 Test procedures and reporting. For Navy acquisitions, the contracting activity should include in each work authorization for first article and quality conformance inspections, the requirement for the preparation and forwarding to the activities listed below of all test and examination procedures prior to performance of any inspection. The work authorization should also include the requirement for the forwarding of all test data in an intelligible form to the activities listed below within five working days after completion of the tests.

Commander
Crane Division
Naval Surface Warfare Center
(Code 50254)
Crane, IN 47522-5000

Commander
Indian Head Division
Naval Surface Warfare Center
(Code 6110)
101 Strauss Avenue
Indian Head, MD 20640-5035

6.7 Definitions.

6.7.1 Primer stock assembly. The primer stock, conforming to Drawing 3028631, containing percussion element, backup disc, firing plug holder, and shear pin.

6.7.2 Misfire. The failure of the main black powder charge of the primer to ignite when the primer is subjected to the appropriate firing source.

6.7.3 Blowback. Gas leakage around or through the stock end of the primer verified by observance through firing or by visual evidence of residue after firing.

6.7.4 Zero time. That moment when the closed bomb firing pin strikes the primer firing plug.

6.7.5 Pressure delay time, t_{dp}. The time between zero time and the initial 10 percent Ppeak point on the pressure-time (P-t) trace (see figure 1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:29Z
Check the source to verify that this is the current version before use.

6.7.6 P-t trace slope, dp/dt. The slope of the straight line L connecting the 10 percent Ppeak and 60 percent Ppeak points on the P-t trace (see figure 1).

6.7.7 Peak chamber pressure, Ppeak. The maximum pressure that occurs at any point on the P-t trace (see figure 1).

6.7.8 Time to 90 percent Ppeak, t_{eff}. The time between zero time to initial 90 percent Ppeak on the P-t trace (see figure 1).

6.8 Subject term (key word) listing.

Ammunition, 76mm/62 caliber
Black powder
Initiator
Propelling charge

Preparing Activity:
Navy-OS
(Project 1390-N745)

Source: https://assist.dla.mil -- Downloaded: 202610-23T07:29Z
Check the source to verify that this is the current version before use.

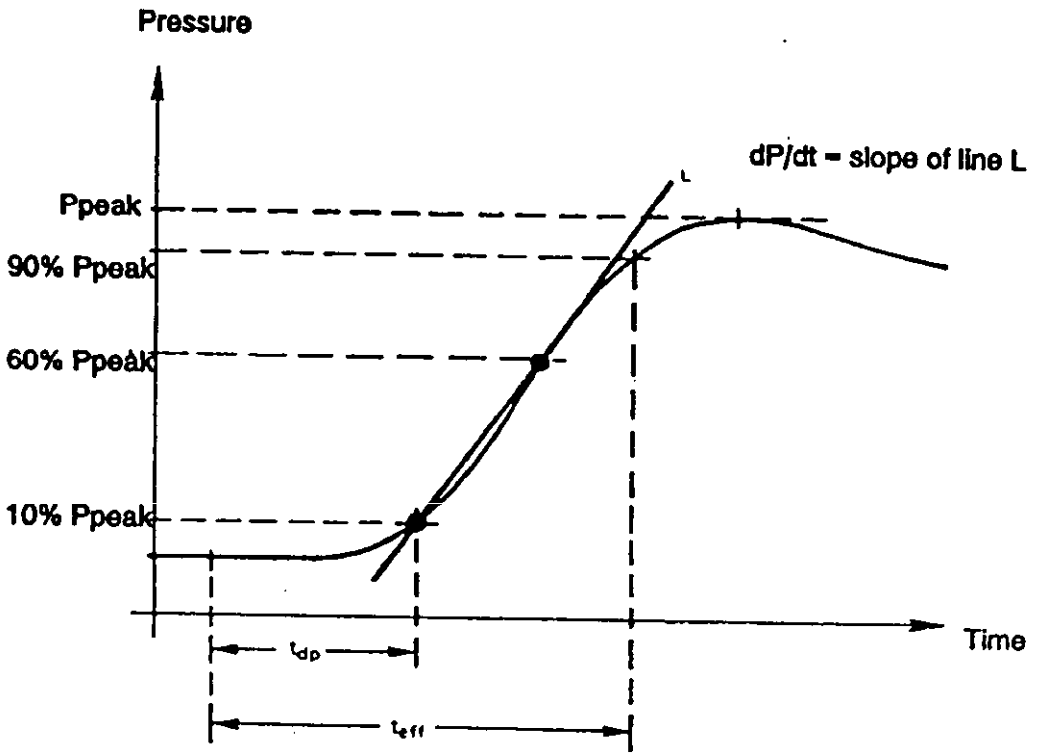


FIGURE 1. Pressure-time trace from closed-bomb firing.

Source: https://assist.dla.mil -- Downloaded: 202610-23T07:29Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	MIL-P-82868(OS)	920513

3. DOCUMENT TITLE
PRIMER, PERCUSSION, MK 161 MOD 0

4. NATURE OF CHANGE (*Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.*)

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (Include Area Code) (1) Commercial	(2) AUTOVON
Commander, Indian Head Division Naval Surface Warfare Center (Code 3730)	(301)743-4358/4510	364-4510
c. ADDRESS (Include Zip Code) 101 Strauss Avenue Indian Head, MD 20640-5035	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

Source: https://assist.dla.mil -- Downloaded: 2026-03-23T07:29Z
Check the source to verify that this is the correct version before use.